

ADDENDUM

SEPA File No. 96-051302

Description of the original proposal: Revision of the reclamation plan for an existing 16.5 acre gravel pit (Surface Mine Reclamation Permit Number 70-011728).

Description of the addendum: Allow for importation of 60,000 cubic yards of clean, original material excavated (from 1761 Patrick Lane, Bellingham, WA) to complete reclamation for stable slopes of 2:1 varying to 3:1 at the Peterson Pit. This is not a significant change in the current reclamation plan and will enhance current reclamation. Truck traffic will not change significantly due to importing material with the same trucks that will be hauling material off site.

Description of existing environmental document: Determination of Non-significance

Proponent: Tom K. Studebaker and Ryan Costanti

Lead Agency: Department of Natural Resources, Surface Mine Reclamation Program

This addendum is being distributed pursuant to WAC 197-11-600 and 197-11-625. It has been determined that this new information does not substantially change the analysis of significant impacts in the existing environmental document.

Responsible Official: Ron Teissere

Position/Title: Department of Natural Resources State Geologist **Phone:** (360) 902-1440

Address: Department of Natural Resources
Division of Geology and Earth Resources
PO Box 47007
Olympia, WA 98504-7007

Date: 6/7/01 **Signature:** 

June 17, 1998

Colony Sand & Gravel

POBox 87 ** 14965 W. Bow Hill Rd., Suite 2 Bow, WA 98232

Office: 360 766-5042 Fax: 360 766-6081

Pit: 360 766-6351 Cell: 360 661-2131

May 25, 2004

Department of Natural Resources
Geology & Earth Resources Division
1111 Washington St. Se.
Olympia, Wa. 98504-7007

Re: Narrative for Reclamation of Peterson Pit


The Peterson pit is located in a portion of Section 26, Township 36, North, Range 3 East, W.M., Skagit County, Washington. The site was originally permitted in 1997. Calendar Construction Inc. purchased the pit in 2003 and has continued operation as Colony Sand & Gravel. We are currently reclaiming the site as we finalize excavation.

Reclamation is progressing as follows:


- * A road has been placed around the perimeter of the pit that is serving as a haul road for reclamation activity;
- * Reclamation is continuing on the east wall with multiple benching;
- * Five benches along the east side of the pit have been back-sloped along terraces to help mitigate erosion;
- * We would like to import an additional Sixty Thousand (60,000) cubic yards of clean fill material to complete reclamation as shown on the attached map to make the slope gentler. The fill material will come from Alger Storage located at 1761 Patrick Lane, Bellingham, WA 98229;
- * Reclamation of slopes should be completed by fall 2004;
- * After slopes have been created topsoil will be placed, seeded, and native vegetation planted, hopefully by spring 2005.

I have included a permanent storm water pond to contain all storm water run off in the pit and prevent any adverse conditions for adjoining properties.


Very truly yours

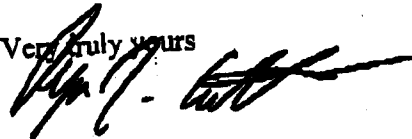


Ryan Costanti
President

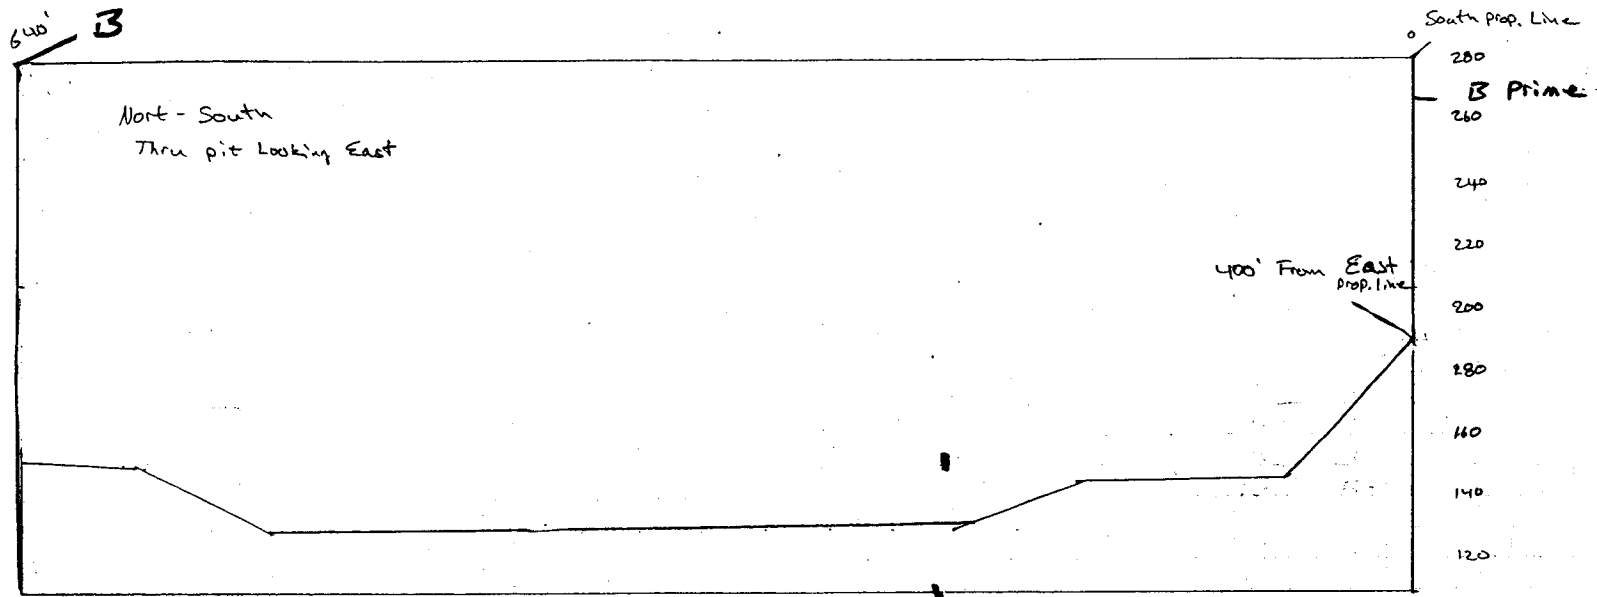

Final
Cross sections at
Peterson Pit
for
Calendar Construction
January 2004.

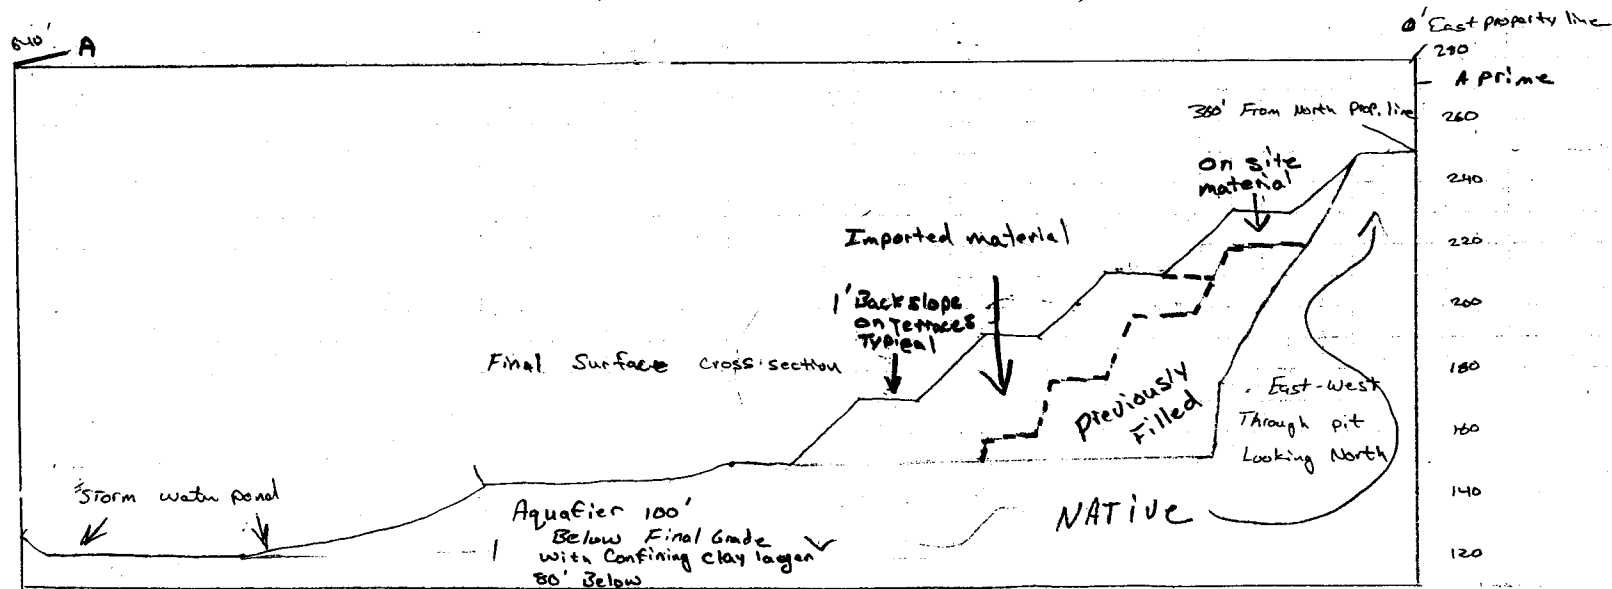

RECEIVED
MAY 26 2004
Geology and Earth

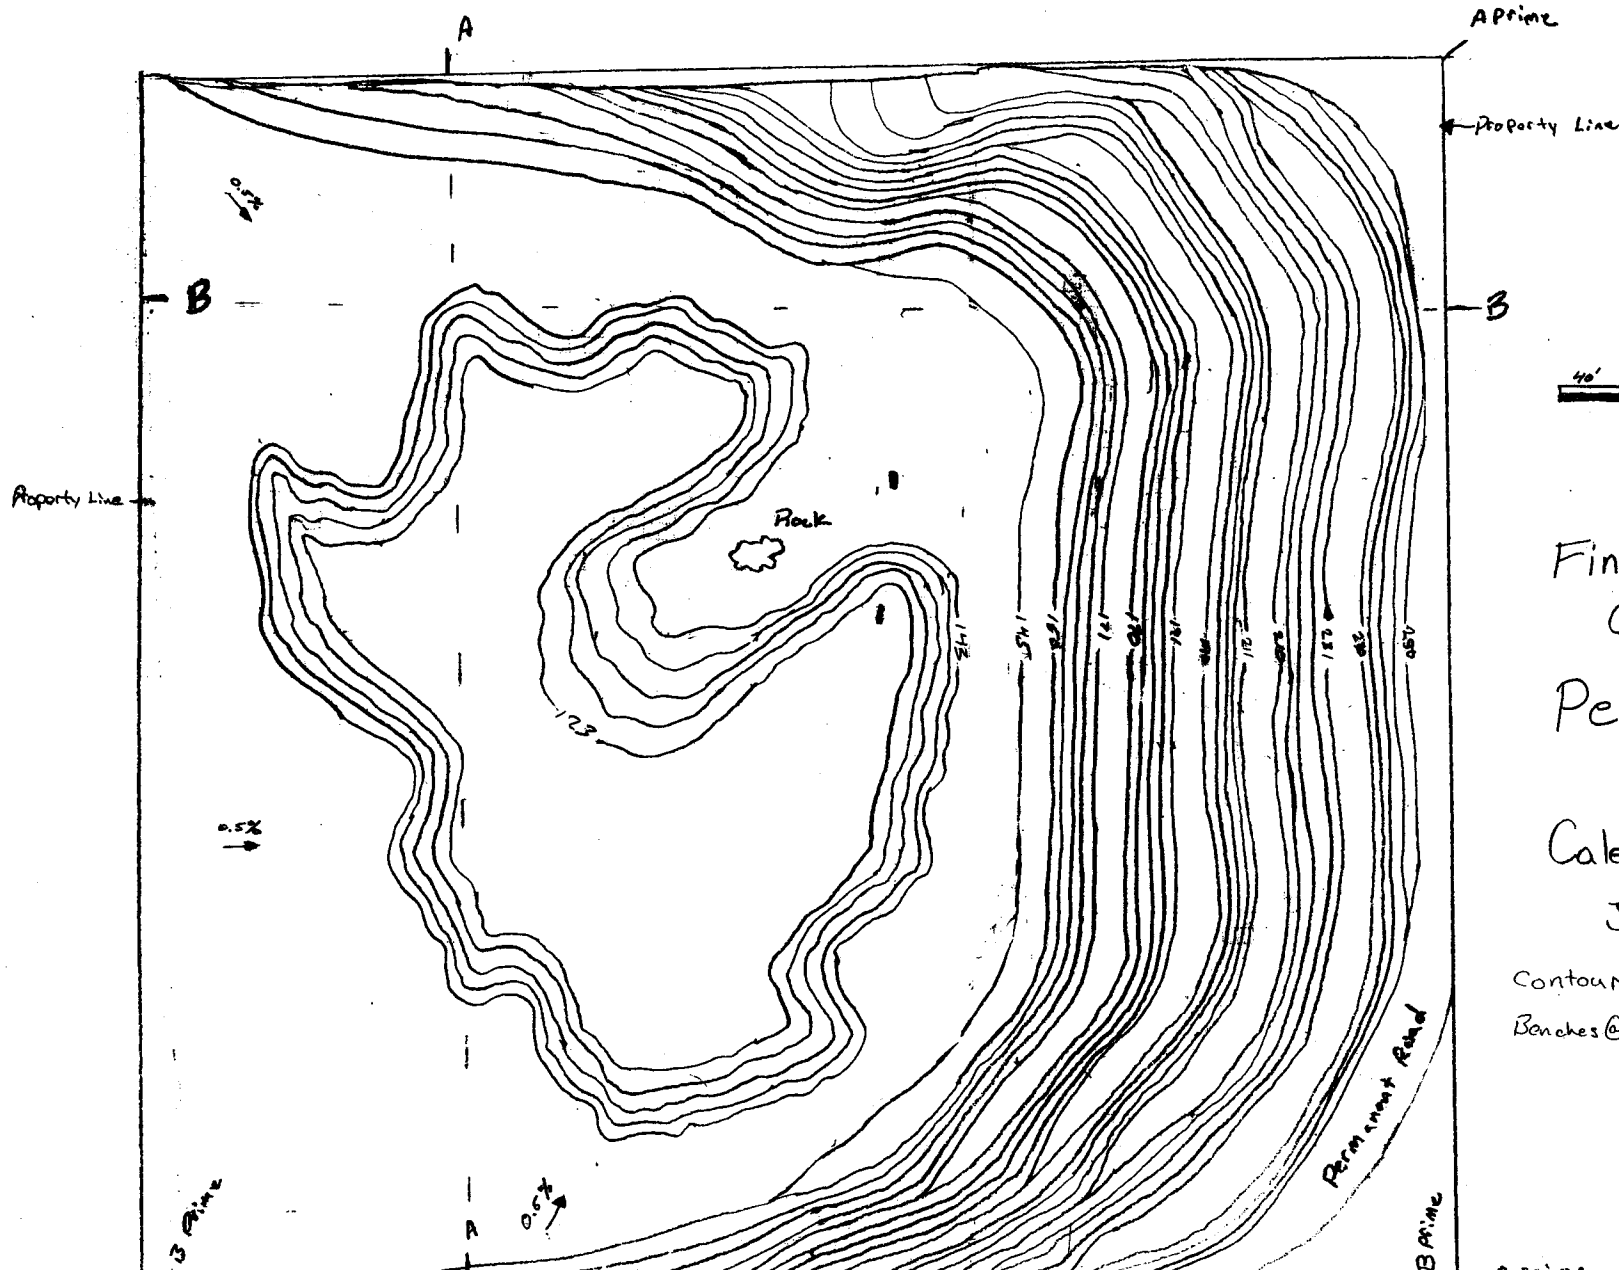

Final Reclaimed
Contours of
Peterson Pit
for
Calendar Construction To
January 2004
Contour Intervals @ 5'
Benches @ 15'

RECEIVED
MAY 26 2004
Geology and Earth