



TIMBER NOTICE OF SALE

SALE NAME: BITTEN

AGREEMENT NO: 30-99254

AUCTION: June 17, 2020 starting at 10:00 a.m.,
Olympic Region Office, Forks, WA

COUNTY: Clallam

SALE LOCATION: Sale located approximately 17 miles northwest of Forks WA

**PRODUCTS SOLD
AND SALE AREA:**

All timber, except trees marked with a band of blue paint or bounded out by leave tree area tags; bounded by timber sale boundary tags in Units 1 and 2; timber sale boundary tags and property lines in Units 3 and 4; all timber bounded by right of way boundary tags on part(s) of Sections 16 all in Township 29 North, Range 15 West, W.M., containing 131 acres, more or less.

CERTIFICATION: This sale is certified under the Sustainable Forestry Initiative® program Standard (cert no: PwC-SFIFM-513)

ESTIMATED SALE VOLUMES AND QUALITY:

Species	Avg DBH	Ring Count	Total MBF	MBF by Grade								
				1P	2P	3P	SM	1S	2S	3S	4S	UT
Douglas fir	14.5	5	1,182						260	569	307	46
Hemlock	12.4	5	1,158						45	705	365	44
Spruce	15.4		519						128	303	83	6
Red alder	20.7		16						10		3	3
Sale Total			2,875									

MINIMUM BID: \$342,000.00

BID METHOD: Sealed Bids

PERFORMANCE

SECURITY: \$68,400.00

SALE TYPE: Lump Sum

EXPIRATION DATE: September 30, 2022

ALLOCATION: Export Restricted

BID DEPOSIT: \$34,200.00 or Bid Bond. Said deposit shall constitute an opening bid at the appraised price.

HARVEST METHOD: Ground - 90%/Cable - 10%. No rubber tire skidders will be allowed unless rutting and skidding requirements can be met and a harvest plan is submitted and approved.

ROADS: 0.50 stations of required prehaul maintenance. 298.70 stations of optional prehaul maintenance. On portions of the D-5000, D-5040 and D-5050 Roads (see road plan for locations) work must be performed during the limited operating period of two hours after sunrise to two hours before sunset, if performed during the marbled murrelet nesting season of April 1 through September 23.

ACREAGE DETERMINATION

CRUISE METHOD: Sale acreage was 100% GPS'd. Sale units were cruised using a variable plot sample.

FEES: \$48,875.00 is due on day of sale. \$9.00 per MBF is due upon removal. These are in addition to the bid price.



WASHINGTON STATE DEPARTMENT OF
NATURAL RESOURCES


TIMBER NOTICE OF SALE

SPECIAL REMARKS: There is a locked gate located on the D-3400 Road (Access to Mora Pit) - contact the Olympic Region Dispatch Center at 360-374-2811 to obtain a AA-1 key.

TIMBER SALE MAP

SALE NAME: Bitten
AGREEMENT #: 30-099254
TOWNSHIP(S): T29R15W
TRUST(S): Common School and Indemnity (3)

REGION: Olympic Region
COUNTY(S): Clallam
ELEVATION RGE: 160' - 640'

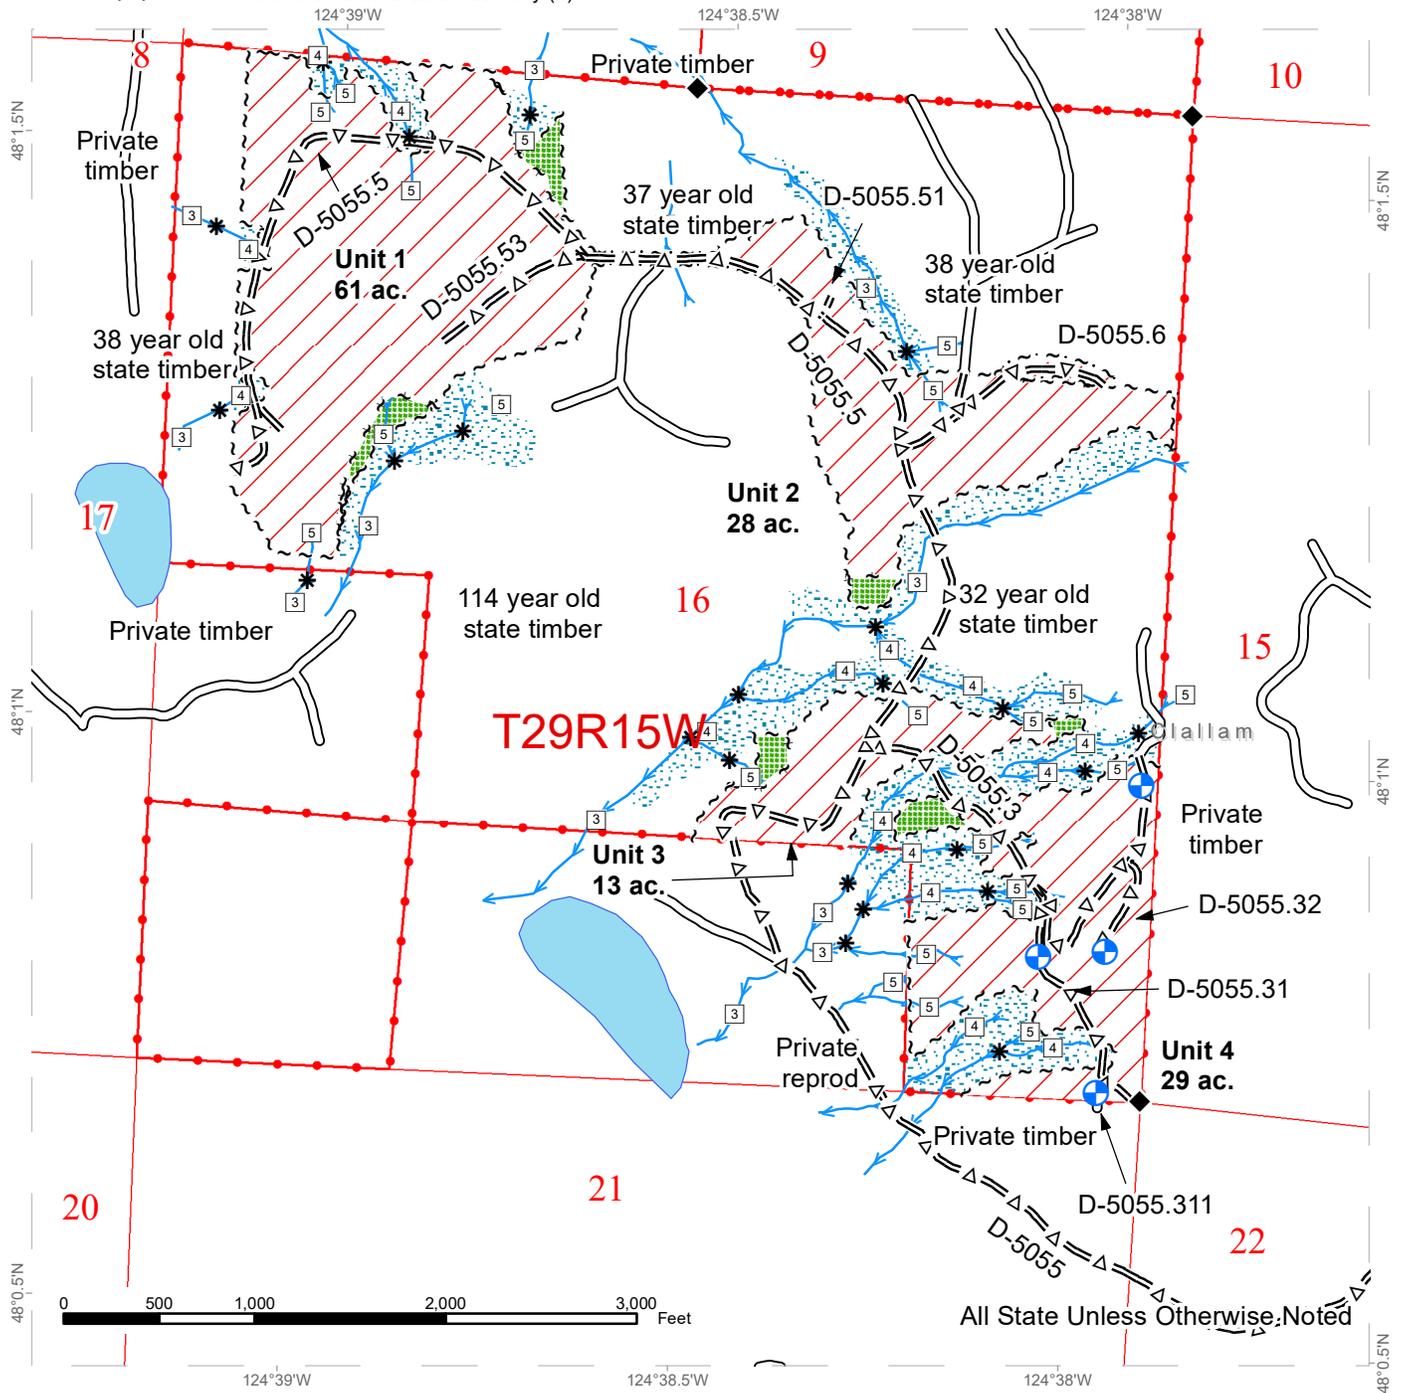

Legend			
	Streams		Variable Retention Harvest
	Stream Type 3		Leave Tree Area
	Stream Type 4		Riparian Mgt Zone
	Stream Type 5		Sale Boundary Tags
	Stream Break		Right of Way Tags - Single
	Open Water		Leave Tree Tags
	Existing Roads		Optional Pre-Haul Maintenance
	Designated Landing		Survey Monument
	Public Land Survey Sections		Public Land Survey Townships
	County Boundary		DNR Managed Lands



DRIVING MAP

SALE NAME: Bitten
AGREEMENT#: 30-099254
TOWNSHIP(S): T29R15W
TRUST(S): Common School and Indemnity (3)

REGION: Olympic Region
COUNTY(S): Clallam
ELEVATION RGE: 160' - 640'



Map may not be to scale

- Timber Sale Unit
- Haul Route
- Other Road
- Milepost Markers
- Highway
- Open Water
- Distance Indicator
- Gate (AA1)
- Rock Pit
- Town

From HWY 101 at MP 193, turn West onto HWY 110, continue for 3.2 miles and then turn right for the Quillayute-Prairie Road. Continue 4 miles, turn right onto the Mina-Smith Road. Continue 0.8 miles and turn left on the D-5000. Continue on the D-5000 for 4.8 miles and turn left on the D-5040, continue 1.2 miles and turn left onto the D-5050. Drive 0.1 miles on the D-5050 and keep right onto the D-5055, continue 1 mile to Unit 3. Continue 0.5 mile past the beginning of Unit 3 on the D-5055 to Unit 2. Continue 0.5 mile past the beginning of Unit 2 on the D-5055 to Unit 1. For Unit 4 drive 0.25 mile past the beginning of Unit 3 on the D-5055 and turn right onto the D-5055.3, continue 0.1 mile to Unit 4.

For Mora Pit: From HWY 101 at MP 193 turn West onto HWY 110, continue 3.2 miles and then turn right for Quillayute-Prairie Road. Continue 6.5 miles and turn left onto the D-3400, continue 0.4 miles to Mora Pit.



**STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES**

**BILL OF SALE AND CONTRACT FOR
FOREST PRODUCTS**

Export Restricted Lump Sum AGREEMENT NO. 30-099254

SALE NAME: BITTEN

**THE STATE OF WASHINGTON DEPARTMENT OF NATURAL
RESOURCES, HEREINAFTER ACTING SOLELY, IN ITS PROPRIETARY
CAPACITY, STATE, AND PURCHASER, AGREE AS FOLLOWS:**

Section G: General Terms

G-001 Definitions

The following definitions apply throughout this contract;

Bill of Sale and Contract for Forest Products: Contract between the Purchaser and the State, which sets forth the procedures and obligations of the Purchaser in exchange for the right to remove forest products from the sale area. The Bill of Sale and Contract for Forest Products may include a Road Plan for any road construction or reconstruction, where applicable.

Contract Administrator: Region Manager's designee responsible for assuring that the contractual obligations of the Purchaser are met.

Forest Product: Any material derived from the forest for commercial use.

Purchaser: The company or individual that has entered into a Bill of Sale and Contract for Forest Products with the State for the right to harvest and remove forest products from the timber sale area.

Road Construction: Includes building new and maintaining existing forest roads and associated work that may be optional or required as described in the Road Plan.

State: The Washington State Department of Natural Resources, landowner and seller of Forest Products from the timber sale area. The State is represented by the Region Manager as designated on the contract signature page. Contractual obligations to the State are enforced by the Region Manager or the designated Contract Administrator.

Subcontractor: Individual or company employed by the Purchaser to perform a portion or all of the services required by The Bill of Sale and Contract for Forest Products. The Purchaser is responsible for independently negotiating, procuring and paying for all subcontracted services rendered.

G-011 Right to Remove Forest Products and Contract Area

Purchaser was the successful bidder on June 17, 2020 and the sale was confirmed on _____. The State, as owner, agrees to sell to Purchaser, and Purchaser agrees to purchase as much of the following forest products as can be cut and removed during the term of this contract: All timber, except trees marked with a band of blue paint or bounded out by leave tree area tags; bounded by timber sale boundary tags in Units 1 and 2; timber sale boundary tags and property lines in Units 3 and 4; all timber bounded by right of way boundary tags, located on approximately 131 acres on part(s) of Section 16 in Township 29 North, Range 15 West W.M. in Clallam County(s) as designated on the sale area and as shown on the attached timber sale map.

All forest products described above from the bole of the tree that meet or exceed 2 inches diameter inside bark on the small end are eligible for removal. Above ground components of a tree that remain as by-products after the manufacture of logs, including but not limited to tree tops, branches, limbs, needles, leaves, stumps, are not eligible for removal under the terms of this contract.

Forest products purchased under a contract that is designated as export restricted shall not be exported until processed. Forest products purchased under a contract that is designated as exportable may be exported prior to processing.

G-020 Inspection By Purchaser

Purchaser hereby warrants to the State that they have had an opportunity to fully inspect the sale area and the forest products being sold. Purchaser further warrants to the State that they enter this contract based solely upon their own judgment of the value of the forest products, formed after their own examination and inspection of both the timber sale area and the forest products being sold. Purchaser also warrants to the State that they enter this contract without any reliance upon the volume estimates, acreage estimates, appraisals, pre-bid documentation, or any other representations by the State Department of Natural Resources.

G-025 Schedules

The following attached schedules are hereby incorporated by reference:

Schedule	Title
A	SLASH PILING SPECS
B	GREEN TREE RETENTION PLAN

G-031 Contract Term

Purchaser shall complete all work required by this contract prior to September 30, 2022.

G-040 Contract Term Adjustment - No Payment

Purchaser may request an adjustment in the contract term. A claim must be submitted in writing and received by the State within 30 days after the start of interruption or delay. The claim must also indicate the actual or anticipated length of interruption or delay. The State may grant an adjustment without charge only if the cause for contract term adjustment is beyond Purchaser's control. The cause must be one of the following and the adjustment may be granted only if operations or planned operations under this contract are actually interrupted or delayed:

- a. Road and bridge failures which deny access.
- b. Access road closures imposed by road owner.
- c. Excessive suspensions as provided in clause G-220.
- d. Regulatory actions not arising from Purchaser's failure to comply with this contract which will prevent timber harvest for a period less than 6 months.

G-051 Contract Term Extension - Payment

Extensions of this contract term may be granted only if, in the judgment of the State, Purchaser is acting in good faith and is endeavoring to remove the forest products conveyed. The term of this contract may be extended for a reasonable time by the State if all of the following conditions are satisfied:

- a. A written request for extension of the contract term must be received prior to the expiration date of the contract.
- b. Completion of all required roads and compliance with all contract and regulatory requirements.
- c. For the first extension, not to exceed 1 year, payment of at least 25 percent of the total contract price.

For the second extension, not to exceed 1 year, payment of at least 90 percent of the total contract price.

The payments shall not include the initial deposit which shall be held according to the provisions of RCW 79.15.100.

- d. Payment of an amount based on 12 percent interest per annum on the unpaid portion of the total contract price.

All payments, except the initial deposit, will be deducted from the total contract price to determine the unpaid portion of the contract.

- e. Payment of \$730.00 per acre per annum for the acres on which an operating release has not been issued .
- f. In no event will the extension charge be less than \$200.00.
- g. Extension payments are non-refundable.

G-053 Surveys - Sensitive, Threatened, Endangered Species

Whenever the State determines that a survey for sensitive, threatened, or endangered species is prudent, or when Purchaser determines a survey is prudent and the State agrees, Purchaser shall perform such surveys at Purchaser's expense and to the standards required by the State. The survey information shall be supplied to the State.

G-060 Exclusion of Warranties

The PARTIES AGREE that the IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE and ALL OTHER WARRANTIES EXPRESSED OR IMPLIED ARE EXCLUDED from this transaction and shall not apply to the goods sold. For example, THE FOLLOWING SPECIFIC MATTERS ARE NOT WARRANTED, and are EXCLUDED from this transaction:

- a. The MERCHANTABILITY of the forest products. The use of the term "merchantable" in any document is not intended to vary the foregoing.
- b. The CONDITION of the forest products. The forest products will be conveyed "AS IS."
- c. The ACREAGE contained within any sale area. Any acreage descriptions appearing in the timber notice of sale, timber sale contract, or other documents are estimates only, provided solely for administrative and identification purposes.
- d. The VOLUME, QUALITY, OR GRADE of the forest products. The State neither warrants nor limits the amount of timber to be harvested. The descriptions of the forest products to be conveyed are estimates only, made solely for administrative and identification purposes.
- e. The CORRECTNESS OF ANY SOIL OR SURFACE CONDITIONS, PRE-SALE CONSTRUCTION APPRAISALS, INVESTIGATIONS, AND ALL OTHER PRE-BID DOCUMENTS PREPARED BY OR FOR THE STATE. These documents have been prepared for the State's appraisal purposes only.

- f. THAT THE SALE AREA IS FREE FROM THREATENED OR ENDANGERED SPECIES or their habitat. The State is not responsible for any interference with forestry operations that result from the presence of any threatened or endangered species, or the presence of their habitat, within the sale area.
- g. THAT THE FORESTRY OPERATIONS to be performed under this contract WILL BE FREE FROM REGULATORY ACTIONS by governmental agencies. The State is not responsible for actions to enforce regulatory laws, such as the Washington Forest Practices Act (chapter 76.09 RCW), taken by the Department of Natural Resources or any other agency that may affect the operability of this timber sale.
- h. Items contained in any other documents prepared for or by the State.

G-062 Habitat Conservation Plan

The State has entered into a Habitat Conservation Plan (HCP) with the U.S. Fish and Wildlife Service and the National Marine Fisheries Service (the Services) to address state trust land management issues relating to compliance with the Federal Endangered Species Act. The activities to be carried out under this contract are located within the State's HCP area and are subject to the terms and conditions of the HCP, and the Services' Incidental Take Permit Nos. TE812521-1 and 1168 (collectively referred to as ITP), or as amended hereafter by the Services. The ITP authorizes the incidental take of certain federally listed threatened and endangered species, as specified in the ITP conditions. All HCP materials, including the ITP, are available for review at the State's Regional Offices and the administrative headquarters in Olympia, Washington.

By signing this contract, Purchaser agrees to comply with the terms and conditions of the ITP, and the HCP, which shall become terms of this contract. The State agrees to authorize the lawful activities of the Purchaser carried out pursuant to this contract, PROVIDED the Purchaser remains in compliance with the terms and conditions of both the HCP and ITP. The requirements set forth in this contract are intended to comply with the terms and conditions of the HCP and ITP. Accordingly, non-compliance with the terms and conditions of the HCP and ITP will render the authorization provided in this paragraph void, be deemed a breach of the contract and may subject Purchaser to liability for violation of the Endangered Species Act.

Any modifications to the contract shall be proposed in writing by Purchaser, shall continue to meet the terms and conditions of the HCP and ITP, and shall require the prior written approval of the Region Manager before taking effect.

G-063 Incidental Take Permit Notification Requirements

- a. Purchaser shall immediately notify the Contract Administrator of new locations of permit species covered by the Incidental Take Permits (ITP) that are discovered within the area covered by the State's Habitat Conservation Plan (HCP), including, but not limited to: locations of occupied murrelet habitat; spotted owl nest sites; wolves; grizzly bears; nests, communal roosts,

or feeding concentrations of bald eagles; peregrine falcon nests; Columbian white-tailed deer; Aleutian Canada geese; Oregon silverspot butterflies; and additional stream reaches found to contain bull trout. Purchaser is required to notify the Contract Administrator upon discovery of any fish species found in streams or bodies of water classified as non-fish bearing. In all circumstances, notification must occur within a 24 hour time period.

- b. Upon locating any live, dead, injured, or sick specimens of any permit species covered by the ITP, Purchaser shall immediately notify the Contract Administrator. Purchaser shall notify the Contract Administrator if there is any doubt as to the identification of a discovered permit species. Purchaser may be required to take certain actions to help the Contract Administrator safeguard the well-being of any live, injured or sick specimens of any permit species discovered, until the proper disposition of such specimens can be determined by the Contract Administrator. Any such requirements will be explained to Purchaser by the Contract Administrator during the Pre-Work Conference. In all circumstances, notification must occur within a 24 hour time period.
- c. Purchaser shall refer to a specific ITP number, ITP TE812521-1 or ITP 1168 (copies which are located in the region office) in all correspondence and reports concerning permit activities.
- d. Provisions and requirements of the ITP shall be clearly presented and explained to Purchaser by Contract Administrator during the Pre-Work Conference as per contract clause G-330. All applicable provisions of the ITP and this schedule must be presented and clearly explained by Purchaser to all authorized officers, employees, contractors, or agents of Purchaser conducting authorized activities in the timber sale area. Any questions Purchaser may have about the ITP should be directed to the Contract Administrator.

G-064 Permits

Purchaser is responsible for obtaining any permits not already obtained by the State that relate to Purchaser's operation. Forest Practice Application / Hydraulic Project Approval permits obtained by the State shall be transferred to Purchaser. Purchaser is responsible for all permits, amendments and renewals.

G-065 Regulatory Disclaimer

The State disclaims any responsibility for, or liability relating to, regulatory actions by any government agency, including actions pursuant to the Forest Practices Act, Ch. 76.09 RCW that may affect the operability of the timber sale.

G-066 Governmental Regulatory Actions

a. Risk

Purchaser shall be responsible for any increased operational costs arising from any applicable foreign or domestic governmental regulation or order that does

not cause contract performance to become commercially impracticable or that does not substantially frustrate the purpose of the contract. If impracticability or frustration results from Purchaser's failure to comply with this contract, Purchaser shall remain responsible for payment of the total contract price notwithstanding the impracticability or frustration.

b. Sale Area

When portions of the sale area become subject to a foreign or domestic governmental regulation or order that will likely prevent timber harvest for a period that will exceed the expiration date of this contract, and Purchaser has complied with this contract, the following shall apply:

- i. RCW 79.15.140 shall govern all adjustments to the contract area.

c. Adjustment of Price

The State shall adjust the total contract price by subtracting from the total contract price an amount determined in the following manner: The State shall cause the timber sale area subject to governmental regulation or order to be measured. The State shall calculate the percentage of the total sale area subject to the governmental regulation or order. The State shall reduce the total contract price by that calculated percentage. However, variations in species, value, costs, or other items pertaining to the affected sale area will be analyzed and included in the adjustment if deemed appropriate by the State. The State will further reduce the total contract price by the reasonable cost of unamortized roads Purchaser constructed but was unable to fully use for removing timber. A reduction in total contract price terminates all of the Purchaser's rights to purchase and remove the timber and all other interest in the affected sale area.

G-070 Limitation on Damage

In the event of a breach of any provision of this contract by the State, the exclusive remedy available to Purchaser will be limited to a return of the initial deposit, unapplied payments, and credit for unamortized improvements made by Purchaser. The State shall not be liable for any damages, whether direct, incidental or consequential.

G-080 Scope of State Advice

No advice by any agent, employee, or representative of the State regarding the method or manner of performing shall constitute a representation or warranty that said method, manner or result thereof will conform to the contract or be suitable for Purchaser's purposes under the contract. Purchaser's reliance on any State advice regarding the method or manner of performance shall not relieve Purchaser of any risk or obligation under the contract. Purchaser retains the final responsibility for its operations under this contract and State shall not be liable for any injuries resulting from Purchaser's reliance on any State advice regarding the method or manner of performance.

G-091 Sale Area Adjustment

The Parties may agree to adjustments in the sale area boundary. The cumulative changes to the sale area during the term of the contract shall not exceed more than four percent of the original sale area. If the sale area is increased, the added forest products become a part of this contract. The State shall determine the volume added and shall calculate the increase to the total contract price using the rates set forth in clause G-101, G-102, or G-103. If the sale area is reduced, the State shall determine the volume to be reduced. The State shall calculate the reduction to the total contract price using the rates set forth in clause G-101, G-102, or G-103.

G-101 Forest Products Not Designated

Any forest products not designated for removal, which must be removed in the course of operations authorized by the State, shall be approved and designated by the Contract Administrator. Added forest products become a part of this contract and the Scribner log scale volume, as defined by the Northwest Log Rules Advisory Group, shall be determined by the Contract Administrator. Added forest products shall be paid for at the following contract payment rates per Mbf Scribner log scale.

The pricing schedule has not been set for the sale.

G-106 Adding Naturally Damaged Forest Products

Any forest products not designated for removal that are seriously damaged by disease, insects or wind, or that may contribute seriously to the spread of insect or disease damage may be added to this sale by the State's Contract Administrator. Additions must be in unlogged areas of the sale and added volume shall not exceed an amount equal to 10 percent of the original advertised volume. Added forest products become a part of this contract and shall be paid for at the rate set forth in clause G-101, G-102 or G-103.

G-111 Title and Risk of Loss

Title to the forest products under this contract passes to the Purchaser after they are removed from the sale area, if adequate advance payment or payment security has been provided to the State under this contract. Purchaser bears all risk of loss of, or damage to, and has an insurable interest in, the forest products described in this contract from the time the sale is confirmed under RCW 79.15.120. Breach of this contract shall have no effect on this provision.

G-116 Sustainable Forestry Initiative® (SFI) Certification

Forest products purchased under this contract are certified as being in conformance with the Sustainable Forestry Initiative program Standard under certificate number: PwC-SFIFM-513.

Purchaser shall have at least one person regularly on-site during active operations that have completed training according to the requirements outlined within the SFI® program Standard. Purchaser shall designate in writing the name(s) of the individual(s) who will be on-site and provide proof of their successful completion of an approved training program prior to active operations.

G-120 Responsibility for Work

All work, equipment, and materials necessary to perform this contract shall be the responsibility of Purchaser. Any damage to improvements, except as provided in clause G-121 or unless the State issues an operating release pursuant to clause G-280, shall be repaired promptly to the satisfaction of the State and at Purchaser's expense.

G-121 Exceptions

Exceptions to Purchaser's responsibility in clause G-120 shall be limited exclusively to the following. These exceptions shall not apply where road damage occurs due to Purchaser's failure to take reasonable precautions or to exercise sound forest engineering and construction practices.

Road is defined as the road bed, including but not limited to its component parts, such as subgrade, ditches, culverts, bridges, and cattle guards.

For the purposes of this clause, damage will be identified by the State and is defined as:

1. Failure of (a) required improvements or roads designated in clause C-050, or (b) required or optional construction completed to the point that authorization to haul has been issued;
2. Caused by a single event from forces beyond the control of Purchaser, its employees, agents, or invitees, including independent contractors; and
3. Includes, but is not limited to natural disasters such as earthquakes, volcanic eruptions, landslides, and floods.

The repair work identified by the State shall be promptly completed by Purchaser at an agreed price. The State may elect to accomplish repairs by means of State-provided resources. The State will bear the cost to repair damages caused by a third party. In all other cases, the Purchaser shall bear responsibility for the costs as described below.

For each event, Purchaser shall be solely responsible for the initial \$5,000 in repairs. For repairs in excess of \$5,000, the parties shall share equally the portion of costs between \$5,000 and \$15,000. The State shall be solely responsible for the portion of the cost of repairs that exceed \$15,000.

Nothing contained in clauses G-120 and G-121 shall be construed as relieving Purchaser of responsibility for, or damage resulting from, Purchaser's operations or negligence, nor shall Purchaser be relieved from full responsibility for making good any defective work or materials. Authorization to haul does not warrant that Purchaser built roads are free from material defect and the State may require additional work, at Purchaser's expense regardless of cost, to remedy deficiencies at any time.

G-140 Indemnity

To the fullest extent permitted by law, Purchaser shall indemnify, defend and hold harmless State, agencies of State and all officials, agents and employees of State, from and against all claims arising out of or resulting from the performance of the contract. "Claim" as used in this contract means any financial loss, claim, suit, action, damage, or expense, including but not limited to attorneys' fees, attributable for bodily injury, sickness, disease or death, or injury to or destruction of tangible property including loss of use resulting therefrom. Purchasers' obligations to indemnify, defend, and hold harmless includes any claim by Purchasers' agents, employees, representatives, or any subcontractor or its employees. Purchaser expressly agrees to indemnify, defend, and hold harmless State for any claim arising out of or incident to Purchasers' or any subcontractors' performance or failure to perform the contract. Purchasers' obligation to indemnify, defend, and hold harmless State shall not be eliminated or reduced by any actual or alleged concurrent negligence of State or its agents, agencies, employees and officials. Purchaser waives its immunity under Title 51 RCW to the extent it is required to indemnify, defend and hold harmless State and its agencies, officials, agents or employees.

G-150 Insurance

Purchaser shall, at its cost and expense, buy and maintain insurance of the types and amounts listed below. Failure to buy and maintain the required insurance may result in a breach and/or termination of the contract at State's option. State may suspend Purchaser operations until required insurance has been secured.

All insurance and surety bonds should be issued by companies admitted to do business within the State of Washington and have a rating of A-, Class VII or better in the most recently published edition of Best's Reports. If an insurer is not admitted, all insurance policies and procedures for issuing the insurance policies must comply with Chapter 48.15 RCW and 284-15 WAC.

The State of Washington, Department of Natural Resources region office of sale origin shall be provided written notice before cancellation or non-renewal of any insurance referred to therein, in accord with the following specifications:

1. Insurers subject to Chapter 48.18 RCW (admitted and regulated by the Insurance Commissioner): The insurer shall give the State 45 days advance notice of cancellation or non-renewal. If cancellation is due to non-payment of premium, the State shall be given 10 days advance notice of cancellation.
2. Insurers subject to Chapter 48.15 RCW (surplus lines): The State shall be given 20 days advance notice of cancellation. If cancellation is due to non-payment of premium, the State shall be given 10 days advance notice of cancellation.

Before starting work, Purchaser shall furnish State of Washington, Department of Natural Resources with a certificate(s) of insurance, executed by a duly authorized

representative of each insurer, showing compliance with the insurance requirements specified in the contract. Insurance coverage shall be obtained by the Purchaser prior to operations commencing and continually maintained in full force until all contract obligations have been satisfied or an operating release has been signed by the State.

Purchaser shall include all subcontractors as insured under all required insurance policies, or shall furnish separate certificates of insurance and endorsements for each subcontractor. Subcontractor(s) must comply fully with all insurance requirements stated herein. Failure of subcontractor(s) to comply with insurance requirements does not limit Purchaser's liability or responsibility.

The State of Washington, Department of Natural Resources, its elected and appointed officials, agents and employees shall be named as an additional insured via endorsement on all general liability, excess, umbrella, and property insurance policies.

All insurance provided in compliance with this contract shall be primary as to any other insurance or self-insurance programs afforded to or maintained by State. Purchaser waives all rights against State for recovery of damages to the extent these damages are covered by general liability or umbrella insurance maintained pursuant to this contract.

By requiring insurance herein, State does not represent that coverage and limits will be adequate to protect Purchaser and such coverage and limits shall not limit Purchaser's liability under the indemnities and reimbursements granted to State in this contract.

The limits of insurance, which may be increased as deemed necessary by State of Washington, Department of Natural Resources, shall not be less than as follows:

Commercial General Liability (CGL) Insurance. Purchaser shall maintain general liability (CGL) insurance, and, if necessary, commercial umbrella insurance with a limit of not less than \$1,000,000.00 per each occurrence. If such CGL insurance contains aggregate limits, the General Aggregate limit shall be at least twice the "each occurrence" limit. CGL insurance shall have products-completed operations aggregate limit of at least two times the "each occurrence" limit. CGL coverage shall include a Logging and Lumbering Endorsement (i.e. Logger's Broad-Form) to cover the events that include, but are not limited to, fire suppression expenses, accidental timber trespasses, and wildfire property damage with limits of not less than \$2,000,000.00 each occurrence.

CGL insurance shall be written on Insurance Services Office (ISO) occurrence form CG 00 01 (or a substitute form providing equivalent coverage). All insurance shall cover liability arising out of premises, operations, independent contractors, products completed operations, personal injury and advertising injury, and liability assumed under an insured contract (including the tort liability of another party assumed in a business contract), and contain separation of insured (cross liability) condition.

Employer's Liability "Stop Gap" Insurance. Purchaser shall buy employers liability insurance, and, if necessary, commercial umbrella liability insurance with limits not less than \$1,000,000.00 each accident for bodily injury by accident or \$1,000,000.00 each employee for bodily injury by disease.

Workers' Compensation Coverage. Purchaser shall comply with all State of Washington workers' compensation statutes and regulations. Workers' compensation coverage shall be provided for all employees of Purchaser and employees of any subcontractor or sub-subcontractor. Coverage shall include bodily injury (including death) by accident or disease, which exists out of or in connection with the performance of this contract. Except as prohibited by law, Purchaser waives all rights of subrogation against State for recovery of damages to the extent they are covered by workers' compensation, employer's liability, commercial general liability, or commercial umbrella liability insurance.

If Purchaser, subcontractor or sub-subcontractor fails to comply with all State of Washington workers' compensation statutes and regulations and State incurs fines or is required by law to provide benefits to or obtain coverage for such employees, Purchaser shall indemnify State. Indemnity shall include all fines, payment of benefits to Purchaser or subcontractor employees, or their heirs or legal representatives, and the cost of effecting coverage on behalf of such employees.

Business Auto Policy (BAP). Purchaser shall maintain business auto liability and, if necessary, commercial umbrella liability insurance with a limit not less than \$1,000,000.00 per accident. Such insurance shall cover liability arising out of "Any Auto". Business auto coverage shall be written on ISO form CA 00 01, or substitute liability form providing equivalent coverage. If necessary the policy shall be endorsed to provide contractual liability coverage and cover a "covered pollution cost or expense" as provided in the 1990 or later editions of CA 00 01. Purchaser waives all rights against State for the recovery of damages to the extent they are covered by business auto liability or commercial umbrella liability insurance.

G-160 Agents

The State's rights and duties will be exercised by the Region Manager at Forks, Washington. The Region Manager will notify Purchaser in writing who is responsible for administering the contract. The Region Manager has sole authority to waive, modify, or amend the terms of this contract in the manner prescribed in clause G-180. No agent, employee, or representative of the State has any authority to bind the State to any affirmation, representation, or warranty concerning the forest products conveyed beyond the terms of this contract.

Purchaser is required to have a person on site during all operations who is authorized to receive instructions and notices from the State. Purchaser shall inform the State in writing who is authorized to receive instructions and notices from the State, and any limits to this person's authority.

G-170 Assignment and Delegation

No rights or interest in this contract shall be assigned by Purchaser without prior written permission of the State. Any attempted assignment shall be void and ineffective for all purposes unless made in conformity with this paragraph. Purchaser may perform any duty through a delegate, but Purchaser is not thereby relieved of any duty to perform or any liability. Any assignee or delegate shall be bound by the terms of the contract in the same manner as Purchaser.

G-180 Modifications

Waivers, modifications, or amendments of the terms of this contract must be in writing signed by Purchaser and the State.

G-190 Contract Complete

This contract is the final expression of the Parties' agreement. There are no understandings, agreements, or representations, expressed or implied, which are not specified in this contract.

G-200 Notice

Notices required to be given under the following clauses shall be in writing and shall be delivered to Purchaser's authorized agent or sent by certified mail to Purchaser's address of record:

G-210 Violation of Contract

G-220 State Suspends Operations

All other notices required to be given under this contract shall be in writing and delivered to the authorized agent or mailed to the Party's post office address. Purchaser agrees to notify the State of any change of address.

G-210 Violation of Contract

- a. If Purchaser violates any provision of this contract, the Contract Administrator, by written notice, may suspend those operations in violation. If the violation is capable of being remedied, Purchaser has 30 days after receipt of a suspension notice to remedy the violation. If the violation cannot be remedied (such as a violation of WAC 240-15-015) or Purchaser fails to remedy the violation within 30 days after receipt of a suspension notice, the State may terminate the rights of Purchaser under this contract and collect damages.
- b. If the contract expires pursuant to clause G-030 or G-031 without Purchaser having performed all its duties under this contract, Purchaser's right to operate is terminated and Purchaser shall not have the right to remedy the breach. This provision shall not relieve Purchaser of any payment obligations.
- c. The State has the right to remedy the breach in the absence of any indicated attempt by Purchaser or if Purchaser is unable, as determined by the State, to

remedy the breach. Any expense incurred by the State shall be charged to Purchaser and shall be paid within 30 days of receipt of billing.

- d. If Purchaser's violation is a result of a failure to make a payment when due, in addition to a. and b. above, interest shall accrue on the unpaid balance at 12 percent per annum, beginning the date payment was due.

G-220 State Suspends Operation

The Contract Administrator may suspend any operation of Purchaser under this contract when the State is suffering, or there is a reasonable expectation the State will suffer environmental, monetary, or other damage if the operation is allowed to continue.

Purchaser shall be in breach of this contract if the operation continues after the suspension notice or if the operation resumes without prior approval and notice from the Contract Administrator.

Purchaser may request a modification of a suspension within 30 days of the start of suspension through the dispute resolution process in clause G-240. If this process results in a finding that the suspension exceeded the time reasonably necessary to stop or prevent damage to the State, Purchaser is entitled to request a contract term adjustment under clause G-040.

If it reasonably appears that the damage that the State is suffering, or can reasonably be expected to suffer if the operation is allowed to continue, will prevent harvest for a period that will exceed 6 months, and Purchaser has complied with this contract, the provisions of clause G-066 shall govern just as if the harvest was prevented by an applicable foreign or domestic governmental regulation or order.

G-230 Unauthorized Activity

Any cutting, removal, or damage of forest products by Purchaser, its employees, agents, or invitees, including independent contractors, in a manner inconsistent with the terms of this contract or State law, is unauthorized. Such activity may subject Purchaser to liability for triple the value of said forest products under RCW 79.02.320 or RCW 79.02.300 and may result in prosecution under RCW 79.02.330 or other applicable statutes.

G-240 Dispute Resolution

The following procedures apply in the event of a dispute regarding interpretation or administration of this contract and the parties agree that these procedures must be followed before a lawsuit can be initiated.

- a. In the event of a dispute, Purchaser must make a written request to the Region Manager for resolution prior to seeking other relief.
- b. The Region Manager will issue a written decision on Purchaser's request within ten business days.

- c. Within ten business days of receipt of the Region Manager's decision, Purchaser may make a written request for resolution to the Deputy Supervisor - Uplands of the Department of Natural Resources.
- d. Unless otherwise agreed, a conference will be held by the Deputy Supervisor - Uplands within 30 calendar days of the receipt of Purchaser's request for review of the Region Manager's written decision. Purchaser and the Region Manager will have an opportunity to present their positions. The Deputy Supervisor - Uplands will issue a decision within a reasonable time of being presented with both Parties' positions.

G-250 Compliance with All Laws

Purchaser shall comply with all applicable statutes, regulations and laws, including, but not limited to; chapter 27.53 RCW, chapter 68.50 RCW, WAC 240-15 and WAC 296-54. Failure to comply may result in forfeiture of this contract.

G-260 Venue

This contract shall be governed by the laws of the State of Washington. In the event of a lawsuit involving this contract, venue shall be proper only in Thurston County Superior Court.

G-270 Equipment Left on State Land

All equipment owned or in the possession of Purchaser, its employees, agents, or invitees, including independent contractors, shall be removed from the sale area and other State land by the termination date of this contract. Equipment remaining unclaimed on State land 60 days after the expiration of the contract period is subject to disposition as provided by law. Purchaser shall pay to the State all costs of moving, storing, and disposing of such equipment. The State shall not be responsible for any damages to or loss of the equipment or damage caused by the moving, storing or disposal of the equipment.

G-280 Operating Release

An operating release is a written document, signed by the State and Purchaser, indicating that Purchaser has been relieved of certain rights or responsibilities with regard to the entire or a portion of the timber sales contract. Purchaser and State may agree to an operating release for this sale, or portion of this sale, prior to the contract expiration, when all contract requirements pertaining to the release area have been satisfactorily completed. Upon issuance of a release, Purchaser's right to cut and remove forest products on the released area will terminate.

G-310 Road Use Authorization

Purchaser is authorized to use the following State roads and roads for which the State has acquired easements and road use permits; D-3400 (Mora Pit), D-5000, D-5040, D-5050, D-5055, D-5055.3, D-5055.31, D-5055.311, D-5055.32, D-5055.5, D-5055.51, D-5055.53, D-5055.54, and the D-5055.6. The State may authorize in writing the use of other roads subject to fees, restrictions, and prior rights.

G-330 Pre-work Conference

Purchaser shall arrange with the Contract Administrator to review this contract and to examine the sale area before beginning any operations. A plan of operations shall be developed and agreed upon by the Contract Administrator and Purchaser before beginning any operations. To the extent that the plan of operations is inconsistent with the contract, the terms of the contract shall prevail. State's acceptance and approval of Purchaser's plan of operations shall not be construed as any statement or warranty that the plan of operations is adequate for Purchaser's purposes or complies with applicable laws.

G-340 Preservation of Markers

Any legal land subdivision survey corners and witness objects are to be preserved. If such are destroyed or disturbed, the Purchaser shall, at the Purchaser's own expense, re-establish them through a licensed land surveyor in accordance with U.S. General Land Office standards. Corners and/or witness objects that must be disturbed or destroyed in the process of road construction or logging shall be adequately referenced and/or replaced in accordance with RCW 58.24.040(8). Such references must be approved by the Contract Administrator prior to removal of said corners and/or witness objects.

G-350 Permanent Plots

There are permanent plot(s) located within the sale area. The aluminum tags at the base of the trees within the plot(s) shall not be removed or destroyed.

G-360 Road Use Reservation

The State shall have the right to use, without charge, all existing roads and any road constructed or reconstructed on State lands by Purchaser under this contract. The State may extend such rights to others. If the State grants such rights to others, the State shall require performance or payment, as directed by the State, for their proportionate share of maintenance based on their use.

G-370 Blocking Roads

Purchaser shall not block the D-5040 or the D-5050 Roads, unless authority is granted in writing by the Contract Administrator.

G-380 Road Easement and Road Use Permit Requirements

Purchaser agrees to comply with the terms and conditions of the attached:

55-000050 - ITT Rayonier Inc.

55-000439 - WA State Dept of Aeronautics

55-000747 - Milwaukee Land Company

55-000938 - ITT Rayonier Inc.

G-430 Open Fires

Purchaser shall not set, or allow to be set by Purchaser's employees, agents, invitees and independent contractors, any open fire at any time of the year without first obtaining permission, in writing, from the Contract Administrator.

Section P: Payments and Securities

P-011 Initial Deposit

Purchaser paid DATA MISSING initial deposit, which will be maintained pursuant to RCW 79.15.100(3). If the operating authority on this contract expires without Purchaser's payment of the full amount specified in Clause P-020, the initial deposit will be immediately forfeited to the State, and will be offset against Purchaser's remaining balance due. Any excess initial deposit funds not needed to ensure full payment of the contract price, or not needed to complete any remaining obligations of the Purchaser existing after contract expiration, will be refunded to the Purchaser.

P-020 Payment for Forest Products

Purchaser agrees to pay the total, lump sum contract price of \$74,750.00. The total contract price consists of a \$0.00 contract bid price plus \$74,750.00 in fees. Fees collected shall be retained by the state unless the contract is adjusted via the G-066 clause. Purchaser shall be liable for the entire purchase price, and will not be entitled to any refunds or offsets unless expressly stated in this contract.

THE PURCHASE PRICE SHALL NOT BE AFFECTED BY ANY FACTORS, INCLUDING: the amount of forest products actually present within the contract area, the actual acreage covered by the contract area, the amount or volume of forest products actually cut or removed by purchaser, whether it becomes physically impossible or uneconomic to remove the forest products, and whether the subject forest products have been lost or damaged by fire or any other cause. The only situations Purchaser may not be liable for the full purchase price are governed by clause G-066, concerning governmental regulatory actions taken during the term of the contract.

P-045 Guarantee of Payment

Purchaser will pay for forest products prior to cutting or will guarantee payment by posting an approved payment security. The amount of cash or payment security shall be determined by the State and shall equal or exceed the value of the cutting proposed by Purchaser.

P-050 Billing Procedure

The State will compute and forward to Purchaser statements of charges provided for in the contract. Purchaser shall deliver payment to the State on or before the date shown on the billing statement.

P-080 Payment Account Refund

Advance payments made under P-045 or P-045.2 remaining on account above the value for the charges shall be returned to Purchaser within 30 days following the final report

of charges. Refunds not made within the 30 day period will accrue interest at the interest rate, as established by WAC 332-100-030, computed on a daily basis until paid.

P-090 Performance Security

Purchaser agrees to furnish, within 30 days of the confirmation date, security acceptable to the State in the amount of \$68,400.00. The Security provided shall guarantee performance of all provisions of this contract and payment of any damages caused by operations under this contract or resulting from Purchaser's noncompliance with any rule or law. Acceptable performance security may be in the form of a performance bond, irrevocable letter of credit, cash, savings or certificate of deposit account assignments, and must name the State as the obligee or beneficiary. A letter of credit must comply with Title 62A RCW, Article 5. Performance security must remain in full force over the duration of the contract length. Surety bonds issued shall conform to the issuance and rating requirements in clause G-150. The State shall retain the performance security pursuant to RCW 79.15.100. Purchaser shall not operate unless the performance security has been accepted by the State. If at any time the State decides that the security document or amount has become unsatisfactory, Purchaser agrees to suspend operations and, within 30 days of notification, to replace the security with one acceptable to the State or to supplement the amount of the existing security.

P-100 Performance Security Reduction

The State may reduce the performance security after an operating release has been issued if the State determines that adequate security exists for any remaining obligations of Purchaser.

Section H: Harvesting Operations

H-001 Operations Outside the Sale Boundaries

No operations shall occur outside the sale boundaries, as described within the contract, unless approved in writing by the State.

H-013 Reserve Tree Damage Definition

Reserve trees are trees required and designated for retention within the sale boundary. Purchaser shall protect reserve trees from being cut, damaged, or removed during operations.

Reserve tree damage exists when one or more of the following criteria occur as a result of Purchaser's operation, as determined by the Contract Administrator:

- a. A reserve tree has one or more scars on its trunk exposing the cambium layer, which in total exceeds 100 square inches.
- b. A reserve tree top is broken or the live crown ratio is reduced below 30 percent.
- c. A reserve tree has more than 1/3 of the circumference of its root system injured such that the cambium layer is exposed.

If the Contract Administrator determines that a reserve tree has been cut or damaged, the Purchaser shall provide a replacement reserve tree of like condition, size, and species within the sale unit containing the damaged leave tree, as approved by the Contract Administrator. Purchaser may be required to pay liquidated damages for Excessive Reserve Tree Damage as detailed in clause D-041.

Removal of designated reserve trees from the sale area is unauthorized, and may invoke the use of the G-230 'Trespass and Unauthorized Activity' clause. Purchaser is required to leave all cut or damaged reserve trees on site.

H-017 Preventing Excessive Soil Disturbance

Operations may be suspended when soil rutting exceeds 12 inches as measured from the natural ground line. To reduce soil damage, the Contract Administrator may require water bars to be constructed, grass seed to be placed on exposed soils, or other mitigation measures. Suspended operations shall not resume unless approval to do so has been given, in writing, by the Contract Administrator.

H-035 Fall Trees Into Sale Area

Trees shall be felled into the sale area unless otherwise approved by the Contract Administrator.

H-040 Purchaser Harvest Plan

Purchaser shall, as part of the plan of operations, prepare an acceptable harvest plan for utilizing rubber tire skidders in sale area. The plan shall address the location and timing of desired use, which are part(s) of this contract. The harvest plan shall be approved by the Contract Administrator prior to beginning the harvest operation. Purchaser shall not deviate from the harvest plan without prior written approval by the Contract Administrator.

H-051 Branding and Painting

Purchaser shall provide a State of Washington registered log brand, acceptable to the State, unless the State agrees to furnish the brand. All purchased timber shall be branded in a manner that meets the requirements of WAC 240-15-030(2)(a)(i). All timber purchased under a contract designated as export restricted shall also be painted in a manner that meets the requirements of WAC 240-15-030(2)(a)(ii).

For pulp loads purchased under a contract designated as export restricted, Purchaser shall brand at least 3 logs with legible brands at one end. Also, 10 logs shall be painted at one end with durable red paint.

H-080 Snags Not to be Felled

Snags not required to be felled for safety reasons may be left standing. Snags felled for safety reasons shall not be removed and must remain where felled.

H-120 Harvesting Equipment

Forest products sold under this contract shall be harvested and removed using cable and ground methods with rubber tire skidders being prohibited, unless skidding and rutting

requirements can be met and a harvest plan has been submitted and approved. Authority to use other equipment or to operate outside the equipment specifications detailed above must be approved in writing by the State.

H-125 Log Suspension Requirements

Lead-end suspension is required for all yarding activities.

H-140 Special Harvest Requirements

Purchaser shall accomplish the following during the harvest operations:

1. Purchaser must have utility lines located before digging next to the Quillayute County Road.
2. Purchaser shall immediately repair all gate damage resulting from operations to an equal or better condition than existed at the time of the sale.
3. While felling timber, two warning signs must be posted on the D-5055 Road.
4. Yarding equipment shall not cross live streams without an FPHP.
5. The Purchaser shall notify all employees and contractors working on this sale that any danger tree, marked or unmarked, may be felled. Any felled marked danger tree shall be replaced with a suitable tree of similar size and species as approved by the Contract Administrator.

Permission to do otherwise must be granted in writing by the Contract Administrator.

H-190 Completion of Settings

Operations begun on any setting of the sale area shall be completed before any operation begins on subsequent settings unless authorized in writing by the Contract Administrator.

H-220 Protection of Residual or Adjacent Trees

Unless otherwise specified by this contract, the Contract Administrator shall identify damaged adjacent or leave trees that shall be paid for according to clause G-230.

H-230 Tops and Limbs Outside the Sale Boundary

Tops and limbs outside the sale boundary as a result of Purchaser's operation shall be removed concurrently with the yarding operation unless otherwise directed by the Contract Administrator.

Section C: Construction and Maintenance

C-040 Road Plan

Road construction and associated work provisions of the Road Plan for this sale, dated 12/18/2019 are hereby made a part of this contract.

C-050 Purchaser Road Maintenance and Repair

Purchaser shall perform work at their own expense on D-5055, D-5055.3, D-5055.31, D-5055.311, D-5055.32, D-5055.5, D-5055.51, D-5055.53, D-5055.54 and the D-5055.6 Roads. All work shall be completed to the specifications detailed in the Road Plan.

C-060 Designated Road Maintainer

If required by the State, Purchaser shall perform maintenance and replacement work as directed by the Contract Administrator on D-5040, D-5050, D-5000, D-3400 (Mora Pit Road) and any other roads not covered in C-050. Purchaser shall furnish a statement in a form satisfactory to the State showing the costs incurred while performing this work. Costs shall be based on the rates set forth in the equipment rate schedule on file at the Region office or Engineering Division in Olympia. The State shall reimburse Purchaser for said costs within 30 days of receipt and approval of the statement.

C-140 Water Bars

Purchaser shall, as directed by the Contract Administrator, construct water bars across haul roads, skid trails and fire trails as necessary to control soil erosion and water pollution.

Section S: Site Preparation and Protection

S-001 Emergency Response Plan

An Emergency Response Plan (ERP) shall be provided to the Contract Administrator containing but not limited to, valid contact numbers and procedures for medical emergencies, fire, hazardous spills, forest practice violations and any unauthorized or unlawful activity on or in the vicinity of the sale area. The Contract Administrator and the State shall be promptly notified whenever an incident occurs requiring an emergency response.

The ERP must be presented for inspection at the prework meeting and kept readily available to all personnel, including subcontractors, on site during active operations.

S-010 Fire Hazardous Conditions

Purchaser acknowledges that operations under this Contract may increase the risk of fire. Purchaser shall conduct all operations under this agreement following the requirements of WAC 332-24-005 and WAC 332-24-405 and further agrees to use the highest degree of care to prevent uncontrolled fires from starting.

In the event of an uncontrolled fire, Purchaser agrees to provide equipment and personnel working at the site to safely and effectively engage in first response fire suppression activity.

Purchaser's failure to effectively engage in fire-safe operations is considered a breach and may result in suspension of operations.

S-030 Landing Debris Clean Up

Landing debris shall be disposed of in a manner approved in writing by the Contract Administrator.

S-035 Logging Debris Clean Up

Slash and debris created from harvest activities shall be treated in a manner approved in writing by the Contract Administrator.

S-060 Pump Truck or Pump Trailer

Purchaser shall provide a fully functional pump truck or pump trailer equipped to meet the specifications of WAC 332-24-005 and WAC 332-24-405 during the "closed season" or as extended by the State and shall provide trained personnel to operate this equipment on the sale area during all operating periods.

S-110 Resource Protection

No equipment may operate within 30 feet of any typed stream unless authority is granted in writing by the Contract Administrator.

S-130 Hazardous Materials

a. Hazardous Materials and Waste - Regulatory Compliance

Purchaser is responsible for understanding and complying with all applicable local, state, and federal hazardous material/waste laws and regulations for operations conducted under this contract. Such regulations pertain to, but may not be limited to, hazardous material storage, handling and transport, personnel protection, release notification and emergency response, cleanup and waste disposal. Purchaser shall be responsible for restoring the site in the event of a spill.

b. Hazardous Materials Spill Prevention

All operations shall be conducted in a manner that avoids the release of hazardous materials, including petroleum products, into the environment (water, air or land).

c. Hazardous Materials Spill Containment, Control and Cleanup

If safe to do so, Purchaser shall take immediate action to contain and control all hazardous material spills. Purchaser shall ensure that enough quick response spill kits capable of absorbing 10 gallons of oil, coolant, solvent or contaminated water are available on site to quickly address potential spills from any piece of equipment at all times throughout active operations. If large quantities of bulk fuel/other hazardous materials are stored on site, Purchaser must be able to effectively control a container leak and contain & recover a hazmat spill equal to the largest single on site storage container volume. (HAZWOPER reg. 29CFR 1910.120 (j) (1) (vii)).

d. Hazardous Material Release Reporting

Releases of oil or hazardous materials to the environment must be reported according to the State Department of Ecology (ECY). It is the responsibility of the Purchaser to have all emergency contact information readily available and a means of remote communication for purposes of quick notification. In the event of a spill, the Purchaser is responsible for notifying the following:

Appropriate Department of Ecology regional office (contact information below).

DNR Contract Administrator

ECY - Northwest Region:

1-425-649-7000

(Island, King, Kitsap, San Juan, Skagit, Snohomish, and Whatcom counties)

ECY - Southwest Region:

1-360-407-6300

(Clallam, Clark, Cowlitz, Grays Harbor, Jefferson, Mason, Lewis, Pacific, Pierce, Skamania, Thurston, and Wahkiakum counties)

ECY - Central Region:

1-509-575-2490

(Benton, Chelan, Douglas, Kittitas, Klickitat, Okanogan, and Yakima counties)

ECY - Eastern Region:

1-509-329-3400

(Adams, Asotin, Columbia, Ferry, Franklin, Garfield, Grant, Lincoln, Pend Oreille, Spokane, Stevens, Walla Walla, and Whitman counties)

S-131 Refuse Disposal

As required by RCW 70.93, All Purchaser generated refuse shall be removed from state lands for proper disposal prior to termination of this contract. No refuse shall be burned, buried or abandoned on state forest lands. All refuse shall be transported in a manner such that it is in compliance with RCW 70.93 and all loads or loose materials shall be covered/secured such that these waste materials are properly contained during transport.

Section D: Damages

D-013 Liquidated Damages or Failure to Perform

The following clauses provide for payments by Purchaser to the State for breaches of the terms of this contract other than failure to perform. These payments are agreed to as liquidated damages and not as penalties. They are reasonable estimates of anticipated harm to the State, which will be caused by Purchaser's breach. These liquidated damages provisions are agreed to by the State and Purchaser with the

understanding of the difficulty of proving loss and the inconvenience or infeasibility of obtaining an adequate remedy. These liquidated damages provisions provide greater certainty for the Purchaser by allowing the Purchaser to better assess its responsibilities under the contract.

Clause P-020 governs Purchaser’s liability in the event Purchaser fails to perform any of the contract requirements other than the below liquidated damage clauses without written approval by the State. Purchaser’s failure to pay for all or part of the forest products sold in this contract prior to expiration of the contract term results in substantial injury to the State. Therefore, Purchaser agrees to pay the State the full lump sum contract price in P-020 in the event of failure to perform.

D-041 Reserve Tree Excessive Damage

When Purchaser’s operations exceed the damage limits set forth in clause H-013, Reserve Tree Damage Definition, and when the Contract Administrator determines that a suitable replacement for a damaged reserve tree is not possible, the damaged trees result in substantial injury to the State. The value of the damaged reserve trees at the time of the breach is not readily ascertainable. Therefore, the Purchaser agrees to pay the State as liquidated damages at the rate of \$1,000.00 per tree for all damaged reserve trees that are not replaced in all units.

IN WITNESS WHEREOF, the Parties hereto have entered into this contract.

STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES

Purchaser

Mona Griswold

Print Name

Olympic Region Manager

Date: _____

Date: _____

Address: _____

CORPORATE ACKNOWLEDGEMENT
(Required for both LLC and Inc. Entities)

STATE OF _____)

COUNTY OF _____)

On this _____ day of _____, 20____, before me personally appeared _____

_____ to me known to be the _____ of the corporation that executed the within and foregoing instrument and acknowledged said instrument to be the free and voluntary act and deed of the corporation, for the uses and purposes therein mentioned, and on oath stated that (he/she was) (they were) authorized to execute said instrument.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal the day and year first above written.

Notary Public in and for the State of

My appointment expires _____

Schedule A
SLASH PILING SPECS

Specifications for Slash Piling

The areas shall be piled by creating circular piles of slash and brush conforming to the following specifications:

1. Piles shall be a minimum of 12 feet tall by 8 feet wide to a maximum of 30 feet tall and 16 feet wide. Piles shall be cone shaped and stable.
2. Piles shall be free of topsoil, large rotten logs and large stumps. No material larger than 8 inches in diameter shall be piled. Any burnable material shall be well scattered.
3. Piles shall not be placed on large stumps or logs.
4. Piles shall be stacked a minimum of 50 feet from all unit boundaries, Riparian Management Zones, leave tree areas and any standing timber; a minimum of 100 feet from any public roads and highways; and a minimum of 200 feet from any structures.
5. Piling shall be completed using an approved hydraulic shovel and grapples.
6. Slash and displaced soil shall be removed from swales and natural drainage channels concurrent with yarding.
7. Slash shall be placed in skid roads or ahead of machinery. Slash which accumulates on landings and/or roads shall be lopped and scattered within the harvest area or as designated by the Contract Administrator.
8. Slash generated during cable yarding shall be stacked in dirt free piles and shall not block roads or interfere with functioning of drainage structures, ditches, or stream channels.

Schedule B
GREEN TREE RETENTION PLAN

Leave the following as directed by the Contract Administrator:

1. All trees marked with a blue band of paint and all leave tree area clumps shall remain standing.

The perimeter of the leave tree clumps are designated by Leave Tree Area tags. The tags face outward from the leave tree clumps.

Unit #	# of Individually Marked Trees	# of Clumps	# of Trees Clumped	Total # of Leave Trees
1	88	2	400	488
2	78	1	146	224
3	45	2	59	104
4	35	1	197	232



WASHINGTON STATE DEPARTMENT OF NATURAL RESOURCES

FOREST EXCISE TAX ROAD SUMMARY SHEET

Region: Olympic

Timber Sale Name: Bitten

Application Number: 30- 099254

EXCISE TAX APPLICABLE ACTIVITIES

Construction: 0 linear feet
Road to be constructed (optional and required) but not abandoned

Reconstruction: 0 linear feet
Road to be reconstructed (optional and required) but not abandoned

Abandonment: 0 linear feet
Abandonment of existing roads not reconstructed under the contract

Decommission: 0 linear feet
Road to be made undriveable but not officially abandoned.

Pre-Haul Maintenance: 29,920 linear feet
Existing road to receive maintenance work (optional and required) prior to haul

EXCISE TAX EXEMPT ACTIVITIES

Temporary Construction: 0 linear feet
Roads to be constructed (optional and required) and then abandoned

0 linear feet
Temporary Reconstruction:
Roads to be reconstructed (optional and required) and then abandoned

All parties must make their own assessment of the taxable or non-taxable status of any work performed under the timber sale contract. The Department of Revenue bears responsibility for determining forest road excise taxes. The Department of Natural Resources developed this form to help estimate the impact of forest excise taxes. However, the information provided may not precisely calculate the actual amount of taxes due. The Department of Revenue is available for consultation by calling 1.800.548.8829.

(Revised 9/18)

Cruise Narrative

Sale Name: Bitten	Region: Olympic
Agreement #:	District: Coast
Lead Cruiser: Jason Michaud	Completion Date: 3-2-18
Other Cruisers: Dakota Truitt	

Unit acreage specifications:

Unit #	Cruised Acres	Cruised acres agree with sale acres? Y/N	If acres do not agree explain why.
1	61	Y	
2	28	Y	
3	13	Y	
4	29	Y	
Total	131	Y	

Unit cruise specifications:

Unit #	Sample Type (VP,FP,ITS,100%)	Expansion Factor (baf,full/half)	Sighting Height (4.5', 16')	Grid Size (plot spacing)	Plot Ratio (cruise/co unt)	Number of plots
1	VP	62.5/40	4.5', 16'	325X325	1:1	25
2	VP	62.5/40	4.5', 16'	300X300	1:1	14
3	VP	62.5/40	4.5', 16'	375x375	1:1	5
4	VP	62.5/40	4.5', 16'	275X275	1:1	19

Sale/Cruise Description:

Minor species cruise intensity	Minor species sampled using same cruise plots.					
Minimum cruise spec:	40% of Form Factor at 16 ft. D.O.B or 5 inch top or merchantable top					
Average ring count:	DF =	5-6	WH =	5-6	SS=	NA
Leave/take tree description:	Leave tree clumps are bounded out with yellow tags, pink flashers and blue paint. Individual leave trees are marked with blue bands and two blue butt marks.					
Other conditions:	Exterior boundaries are marked with white tags and pink flashers					

Sort Description:

HA– Logs meeting the following criteria: Surface characteristics for a high quality A sort will have sound tight knots not to exceed 1 ½" in diameter, numbering not more than an average of one per foot of log length. May include logs with not more than two larger knots. Knots and knot indicators ½" in diameter and smaller shall not be a determining factor. Logs will have a growth ring count of 6 or more rings per inch in the outer third top end of the log. (minimum diameter 8".)

HB – Logs meeting the following criteria: Surface characteristics for a B sort will have sound tight knots not to exceed 1 ½" in diameter. May include logs with not more than two larger knots up to 2 ½" in diameter. Logs will have a growth ring count of 6 or more rings per inch in the outer third to end of the log. (minimum diameter 8".)

R – Logs meeting the following criteria: Gross diameter of 12 inches or greater, excessive knots greater than 2 ½ inches with recovery less than 65% of the net scale.

P- Hemlock Logs Meeting the following criteria: Gross diameter of 6 inches or greater sound tight knots not to exceed 1 ½" in diameter.

Field Observations:

Bitten timber sale is located off the D-5825. The major species present are Douglas-fir, Western Hemlock and Sitka Spruce. There is a minor component of Red Alder scattered throughout the sale. The average diameter for the fir is 14.5 with a bole length of 59 feet. The average diameter of the hemlock is 12.4 with an average bole height of 54 feet. The spruce has an average diameter of 15.4 and an average bole of 59 feet. Major defect in all species is spike knots double tops and butt rot. The sale is 18% Sika Spruce, 41% Douglas- fir And 40% Western hemlock. (1% red alder) Access to the units is good and this sale will be logged using 100% ground based methods.

Grants: 03,08

Prepared By: Jason Michaud

Forester / Timber Cruiser

T028 R015 S16 TyU1 THRU T028 R015 S16 TyU4	Project: BITE Acres 131.00	Page 1 Date 5/13/2019 Time 1:11:02PM
--	---	---

S Spp	So T	Gr rt ad	% Net BdFt	Bd. Ft. per Acre Def% Gross Net			Total Net MBF	Percent of Net Board Foot Volume								Average Log				Logs Per /Acre
								Log Scale Dia.				Log Length				Ln Ft	Dia In	Bd Ft	CF/ Lf	
								5-7	8-11	12-15	16+	12-20	21-30	31-35	36-99					
SS	D	2S	24	13.4	1,129	978	128			85	15				100	38	14	244	2.36	4.0
SS	D	3S	58	8.8	2,534	2,310	303	16	84					1	99	36	9	90	0.81	25.6
SS	D	4S	16		633	633	83	100					9	61	30	24	5	25	0.33	25.5
SS	D	UT	2		43	43	6	100					100			13	5	10	0.24	4.3
SS Totals			18	8.6	4,339	3,965	519	27	44	26	4	3	10	5	82	29	7	67	0.76	59.4
DF	D	2S	21	17.7	2,411	1,985	260		33	61	6				100	40	12	167	1.52	11.9
DF	D	3S	49	14.6	5,090	4,346	569	21	79					1	99	36	8	83	0.80	52.5
DF	D	4S	26	20.2	2,939	2,345	307	99	1			4	27	25	43	31	5	31	0.40	76.6
DF	D	UT	4		350	350	46	100				33	25		42	15	5	16	0.31	21.5
DF Totals			41	16.4	10,791	9,026	1,182	40	46	13	1	2	8	7	82	31	7	56	0.65	162.5
WH	D	2S	3	10.4	384	344	45		38	62					100	40	12	172	1.37	2.0
WH	D	3S	59	6.6	5,589	5,218	684	6	94					1	99	36	9	93	0.72	56.1
WH	D	4S	32	8.5	3,040	2,783	365	86	14			10	37	17	36	28	5	31	0.31	88.8
WH	D	UT	4		338	338	44	100				100				15	5	16	0.23	20.9
WH	PL	3S	2		157	157	21		100					100		34	8	70	0.57	2.2
WH Totals			40	7.0	9,508	8,840	1,158	35	63	2		7	12	8	74	29	7	52	0.49	170.0
RA	D	2S	63	21.1	101	79	10			100				100		30	13	153	2.19	.5
RA	D	4S	19	18.0	29	24	3	100						100		23	6	25	0.46	1.0
RA	D	UT	18		22	22	3		100			100				20	9	50	1.42	.4
RA Totals			1	17.4	151	125	16	19	18	63		18	82			24	8	65	1.21	1.9
Totals				11.4	24,789	21,956	2,876	35	52	11	1	4	10	7	78	30	7	56	0.60	393.8

TC PSTATS		PROJECT STATISTICS								PAGE	1
		PROJECT				BITE				DATE	5/13/2019
TWP	RGE	SC	TRACT	TYPE		ACRES	PLOTS	TREES	CuFt	BdFt	
028	015	16	BITE	U1	THR	131.00	63	260	S	W	
028	015	16	BITE	U4							
		PLOTS	TREES	TREES PER PLOT	ESTIMATED TOTAL TREES	PERCENT SAMPLE TREES					
TOTAL		63	260	4.1							
CRUISE		31	129	4.2	31,400	4					
DBH COUNT											
REFOREST											
COUNT		31	131	4.2							
BLANKS		1									
100 %											
STAND SUMMARY											
	SAMPLE TREES	TREES /ACRE	AVG DBH	BOLE LEN	REL DEN	BASAL AREA	GROSS BF/AC	NET BF/AC	GROSS CF/AC	NET CF/AC	
DOUG FIR	63	100.9	14.5	59	30.5	116.5	10,791	9,026	3,253	3,254	
WHEMLOCK	43	105.2	12.4	54	25.1	88.4	9,508	8,840	2,466	2,466	
S SPRUCE	20	32.7	15.4	59	10.8	42.6	4,339	3,965	1,309	1,309	
R ALDER	3	1.0	20.7	53	0.5	2.2	151	125	57	57	
TOTAL	<i>129</i>	<i>239.7</i>	<i>13.8</i>	<i>57</i>	<i>67.2</i>	<i>249.6</i>	<i>24,789</i>	<i>21,956</i>	<i>7,085</i>	<i>7,086</i>	
CONFIDENCE LIMITS OF THE SAMPLE											
68.1 TIMES OUT OF 100 THE VOLUME WILL BE WITHIN THE SAMPLE ERROR											
CL	68.1	COEFF	SAMPLE TREES - BF				# OF TREES REQ.	INF. POP.			
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR		60.1	7.6	116	125	135					
WHEMLOCK		50.6	7.7	97	105	113					
S SPRUCE		64.6	14.8	147	172	197					
R ALDER		42.1	29.1	102	143	185					
TOTAL		<i>61.6</i>	<i>5.4</i>	<i>119</i>	<i>126</i>	<i>133</i>	<i>152</i>	<i>38</i>	<i>17</i>		
CL	68.1	COEFF	TREES/ACRE				# OF PLOTS REQ.	INF. POP.			
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR		127.7	16.1	85	101	117					
WHEMLOCK		123.1	15.5	89	105	121					
S SPRUCE		191.9	24.2	25	33	41					
R ALDER		558.6	70.3	0	1	2					
TOTAL		<i>60.4</i>	<i>7.6</i>	<i>221</i>	<i>240</i>	<i>258</i>	<i>146</i>	<i>36</i>	<i>16</i>		
CL	68.1	COEFF	BASAL AREA/ACRE				# OF PLOTS REQ.	INF. POP.			
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR		99.2	12.5	102	116	131					
WHEMLOCK		112.4	14.2	76	88	101					
S SPRUCE		175.1	22.0	33	43	52					
R ALDER		587.8	74.0	1	2	4					
TOTAL		<i>42.6</i>	<i>5.4</i>	<i>236</i>	<i>250</i>	<i>263</i>	<i>72</i>	<i>18</i>	<i>8</i>		
CL	68.1	COEFF	NET BF/ACRE				# OF PLOTS REQ.	INF. POP.			
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR		97.6	12.3	7,918	9,026	10,135					
WHEMLOCK		111.9	14.1	7,594	8,840	10,085					
S SPRUCE		182.3	22.9	3,055	3,965	4,874					
R ALDER		608.8	76.6	29	125	221					
TOTAL		<i>42.5</i>	<i>5.4</i>	<i>20,780</i>	<i>21,956</i>	<i>23,131</i>	<i>72</i>	<i>18</i>	<i>8</i>		
CL	68.1	COEFF	V_BAR/ACRE				# OF PLOTS REQ.	INF. POP.			
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR		15.1	1.9	68	77	87					
WHEMLOCK				86	100	114					
S SPRUCE		99.1	12.5	72	93	115					
R ALDER		608.8	76.6	13	56	99					

TC PSTATS		<u>PROJECT STATISTICS</u>							PAGE	2
		PROJECT		BITE			DATE		5/13/2019	
TWP	RGE	SC	TRACT	TYPE		ACRES	PLOTS	TREES	CuFt	BdFt
028	015	16	BITE	U1	THR	131.00	63	260	S	W
028	015	16	BITE	U4						
CL	68.1		COEFF	V_BAR/ACRE			# OF PLOTS REQ.		INF. POP.	
SD:	1.00		VAR.	S.E.%	LOW	AVG	HIGH	5	10	15
TOTAL			42.1	5.3	83	88	93	71	18	8

TC TSTATS				STATISTICS				PAGE	1	
				PROJECT	BITE		DATE	5/13/2019		
TWP	RGE	SECT	TRACT	TYPE	ACRES	PLOTS	TREES	CuFt	BdFt	
028	015	16	BITE	U1	61.00	25	84	S	W	
		PLOTS	TREES	TREES PER PLOT	ESTIMATED TOTAL TREES	PERCENT SAMPLE TREES				
TOTAL		25	84	3.4						
CRUISE		14	55	3.9	12,120	.5				
DBH COUNT										
REFOREST										
COUNT		10	29	2.9						
BLANKS		1								
100 %										
STAND SUMMARY										
	SAMPLE TREES	TREES /ACRE	AVG DBH	BOLE LEN	REL DEN	BASAL AREA	GROSS BF/AC	NET BF/AC	GROSS CF/AC	NET CF/AC
DOUG FIR	28	74.9	15.2	60	24.3	95.0	9,009	7,662	2,709	2,708
WHEMLOCK	15	88.3	11.4	51	18.5	62.5	6,826	5,924	1,711	1,711
S SPRUCE	9	33.4	15.7	63	11.3	45.0	4,809	4,375	1,443	1,443
R ALDER	3	2.1	20.7	53	1.1	4.8	325	269	122	122
TOTAL	55	198.7	13.8	57	55.7	207.3	20,969	18,229	5,986	5,983
CONFIDENCE LIMITS OF THE SAMPLE										
68.1 TIMES OUT OF 100 THE VOLUME WILL BE WITHIN THE SAMPLE ERROR										
CL:	68.1 %	COEFF	SAMPLE TREES - BF				# OF TREES REQ.		INF. POP.	
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15	
DOUG FIR	60.6	11.6		113	128	143				
WHEMLOCK	59.4	15.9		75	89	103				
S SPRUCE	69.3	24.4		149	198	246				
R ALDER	42.1	29.1		102	143	185				
TOTAL	68.6	9.2		118	130	142	188	47	21	
CL:	68.1 %	COEFF	TREES/ACRE				# OF PLOTS REQ.		INF. POP.	
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15	
DOUG FIR	116.5	23.8		57	75	93				
WHEMLOCK	117.1	23.9		67	88	109				
S SPRUCE	187.7	38.3		21	33	46				
R ALDER	347.4	70.8		1	2	4				
TOTAL	51.3	10.5		178	199	219	109	27	12	
CL:	68.1 %	COEFF	BASAL AREA/ACRE				# OF PLOTS REQ.		INF. POP.	
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15	
DOUG FIR	109.3	22.3		74	95	116				
WHEMLOCK	108.0	22.0		49	63	76				
S SPRUCE	163.0	33.2		30	45	60				
R ALDER	366.4	74.7		1	5	8				
TOTAL	41.3	8.4		190	207	225	71	18	8	
CL:	68.1 %	COEFF	NET BF/ACRE				# OF PLOTS REQ.		INF. POP.	
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15	
DOUG FIR	110.2	22.5		5,940	7,662	9,384				
WHEMLOCK	109.8	22.4		4,598	5,924	7,251				
S SPRUCE	167.9	34.2		2,877	4,375	5,873				
R ALDER	380.1	77.5		60	269	477				
TOTAL	42.4	8.6		16,654	18,229	19,805	75	19	8	
CL:	68.1 %	COEFF	V-BAR/ACRE				# OF PLOTS REQ.		INF. POP.	
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15	
DOUG FIR	72.7	14.8		63	81	99				
WHEMLOCK	19.7	4.0		74	95	116				
S SPRUCE	69.9	14.3		64	97	131				
R ALDER	380.1	77.5		13	56	99				
TOTAL	137.7	28.1		80	88	96	788	197	88	

TC TSTATS				STATISTICS				PAGE	2	
				PROJECT	BITE			DATE	5/13/2019	
TWP	RGE	SECT	TRACT	TYPE	ACRES	PLOTS	TREES	CuFt	BdFt	
028	015	16	BITE	U1	61.00	25	84	S	W	
CL:	68.1 %	COEFF		V-BAR/ACRE			# OF PLOTS REQ.		INF. POP.	
SD:	1.0	VAR.	S.E.%	LOW	AVG	HIGH	5	10	15	

T028 R015 S16 TU2										T028 R015 S16 TU2				
Twp	Rge	Sec	Tract	Type	Acres	Plots	Sample Trees	CuFt	BdFt					
028	015	16	BITE	U2	28.00	14	31	S	W					

Spp	S T	So rt	Gr ad	% Net BdFt	Bd. Ft. per Acre			Total Net MBF	Percent Net Board Foot Volume								Average Log				Logs Per /Acre
									Log Scale Dia.				Log Length				Ln	Dia	Bd	CF/ Lf	
									5-7	8-11	12-15	16+	12-20	21-30	31-35	36-99	Ft	In	Ft	Lf	
WH	D	3S		50	1.2	7,998	7,903	221	7	93					100	36	9	94	0.72	84.5	
WH	D	4S		45	1.7	7,231	7,105	199	75	25			5	24	9	61	30	6	41	0.33	174.7
WH	D	UT		5		724	724	20	100				100			16	5	15	0.24	46.9	
WH	Totals			61	1.4	15,953	15,732	441	42	58			7	11	4	78	29	6	51	0.46	306.1
SS	D	2S		12		834	834	23		100					100	36	12	180	1.60	4.6	
SS	D	3S		61	9.1	4,391	3,992	112		77	23				100	36	10	118	1.05	34.0	
SS	D	4S		27		1,707	1,707	48	100				59	41		27	5	28	0.31	61.7	
SS	Totals			25	5.7	6,931	6,532	183	26	47	27		16	11	74	31	7	65	0.68	100.3	
DF	D	3S		60	25.0	2,977	2,231	62	48	52					100	36	8	61	0.78	36.4	
DF	D	4S		17	20.9	787	623	17	100					47	53	29	6	31	0.48	20.4	
DF	D	UT		23		852	852	24	100				20		80	22	5	30	0.39	28.3	
DF	Totals			14	19.7	4,616	3,706	104	69	31			5	8	88	30	7	44	0.61	85.0	
Type Totals					5.6	27,499	25,971	727	42	52	7		5	12	5	78	30	7	53	0.53	491.5

TC TSTATS				STATISTICS				PAGE	1	
				PROJECT	BITE		DATE	5/13/2019		
TWP	RGE	SECT	TRACT	TYPE	ACRES	PLOTS	TREES	CuFt	BdFt	
028	015	16	BITE	U2	28.00	14	65	S	W	
				TREES	ESTIMATED	PERCENT				
				PER PLOT	TOTAL	SAMPLE				
					TREES	TREES				
TOTAL		14	65	4.6						
CRUISE		6	31	5.2	8,838		.4			
DBH COUNT										
REFOREST										
COUNT		8	34	4.3						
BLANKS										
100 %										
STAND SUMMARY										
	SAMPLE	TREES	AVG	BOLE	REL	BASAL	GROSS	NET	GROSS	NET
	TREES	/ACRE	DBH	LEN	DEN	AREA	BF/AC	BF/AC	CF/AC	CF/AC
WHEMLOCK	17	198.0	12.0	54	45.1	156.3	15,953	15,732	4,100	4,100
S SPRUCE	7	61.7	14.6	54	18.7	71.4	6,931	6,532	2,077	2,078
DOUG FIR	7	56.0	14.3	57	16.5	62.5	4,616	3,706	1,554	1,553
TOTAL	31	315.6	13.0	54	80.5	290.2	27,499	25,971	7,730	7,731
CONFIDENCE LIMITS OF THE SAMPLE										
68.1 TIMES OUT OF 100 THE VOLUME WILL BE WITHIN THE SAMPLE ERROR										
CL: 68.1 %	COEFF	SAMPLE TREES - BF					# OF TREES REQ.		INF. POP.	
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
WHEMLOCK	41.5	10.4	83	92	102					
S SPRUCE	44.8	18.2	113	139	164					
DOUG FIR	69.0	28.1	50	70	90					
TOTAL	52.2	9.4	89	98	107	109	27	12		
CL: 68.1 %	COEFF	TREES/ACRE					# OF PLOTS REQ.		INF. POP.	
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
WHEMLOCK	91.9	25.5	148	198	248					
S SPRUCE	131.9	36.5	39	62	84					
DOUG FIR	69.1	19.1	45	56	67					
TOTAL	48.5	13.4	273	316	358	101	25	11		
CL: 68.1 %	COEFF	BASAL AREA/ACRE					# OF PLOTS REQ.		INF. POP.	
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
WHEMLOCK	89.8	24.9	117	156	195					
S SPRUCE	132.3	36.6	45	71	98					
DOUG FIR	67.9	18.8	51	63	74					
TOTAL	41.9	11.6	256	290	324	75	19	8		
CL: 68.1 %	COEFF	NET BF/ACRE					# OF PLOTS REQ.		INF. POP.	
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
WHEMLOCK	90.1	25.0	11,805	15,732	19,660					
S SPRUCE	135.6	37.6	4,078	6,532	8,987					
DOUG FIR	85.1	23.6	2,832	3,706	4,579					
TOTAL	44.3	12.3	22,785	25,971	29,156	84	21	9		
CL: 68.1 %	COEFF	V-BAR/ACRE					# OF PLOTS REQ.		INF. POP.	
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
WHEMLOCK			76	101	126					
S SPRUCE	69.6	19.3	57	91	126					
DOUG FIR			45	59	73					
TOTAL	213.3	59.1	79	89	100	1,955	489	217		

T028 R015 S16 TU3		T028 R015 S16 TU3
Twp Rge Sec Tract Type Acres Plots Sample Trees CuFt BdFt		
028 015 16 BITE U3 13.00 5 6 S W		


Spp	So	Gr	%	Bd. Ft. per Acre			Total	Percent Net Board Foot Volume								Average Log				Logs Per /Acre	
								Log Scale Dia.				Log Length				Ln Dia		Bd			CF/Lf
								5-7	8-11	12-15	16+	12-20	21-30	31-35	36-99	Ft	In	Ft	Ft		
Def%	Gross	Net	Net MBF																		
DF	D	4S	100	31.5	11,903	8,155	106	100					40	60	35	5	33	0.47	244.5		
DF	Totals		57	31.5	11,903	8,155	106	100					40	60	35	5	33	0.47	244.5		
WH	D	3S	77	12.5	5,105	4,467	58	100						100	36	8	70	0.71	63.8		
WH	D	4S	23		1,276	1,276	17	100					100		20	5	20	0.24	63.8		
WH	Totals		40	10.0	6,382	5,744	75	22	78			22		78	28	7	45	0.54	127.6		
SS	D	3S	100	16.7	636	530	7	100						100	36	7	50	0.83	10.6		
SS	Totals		4	16.7	636	530	7	100						100	36	7	50	0.83	10.6		
Type Totals				23.7	18,921	14,429	188	69	31			9		23	68	33	6	38	0.50	382.8	

TC TSTATS				STATISTICS						PAGE	1
				PROJECT	BITE						
				DATE		5/13/2019					
TWP	RGE	SECT	TRACT	TYPE	ACRES	PLOTS	TREES	CuFt	BdFt		
028	015	16	BITE	U3	13.00	5	20	S	W		
				TREES	ESTIMATED	PERCENT					
				PER PLOT	TOTAL	SAMPLE					
				PLOTS	TREES	TREES	TREES				
TOTAL		5	20	4.0							
CRUISE		2	6	3.0	4,147		.1				
DBH COUNT											
REFOREST											
COUNT		3	14	4.7							
BLANKS											
100 %											
STAND SUMMARY											
	SAMPLE	TREES	AVG	BOLE	REL	BASAL	GROSS	NET	GROSS	NET	
	TREES	/ACRE	DBH	LEN	DEN	AREA	BF/AC	BF/AC	CF/AC	CF/AC	
DOUG FIR	4	244.5	11.5	52	51.7	175.0	11,903	8,155	3,990	3,988	
WHEMLOCK	1	63.8	13.4	63	17.1	62.5	6,382	5,744	1,939	1,939	
S SPRUCE	1	10.6	14.7	50	3.3	12.5	636	530	318	318	
TOTAL	6	319.0	12.0	54	72.2	250.0	18,921	14,429	6,247	6,244	
CONFIDENCE LIMITS OF THE SAMPLE											
68.1 TIMES OUT OF 100 THE VOLUME WILL BE WITHIN THE SAMPLE ERROR											
CL: 68.1 %	COEFF	SAMPLE TREES - BF					# OF TREES REQ.		INF. POP.		
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15			
DOUG FIR	15.4	8.8	30	33	35						
WHEMLOCK											
S SPRUCE											
TOTAL	52.1	23.2	35	45	55	129	32	14			
CL: 68.1 %	COEFF	TREES/ACRE					# OF PLOTS REQ.		INF. POP.		
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15			
DOUG FIR	105.3	52.3	117	245	373						
WHEMLOCK	173.2	86.1	9	64	119						
S SPRUCE	223.6	111.1		11	22						
TOTAL	65.1	32.3	216	319	422	209	52	23			
CL: 68.1 %	COEFF	BASAL AREA/ACRE					# OF PLOTS REQ.		INF. POP.		
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15			
DOUG FIR	105.3	52.3	83	175	267						
WHEMLOCK	173.2	86.1	9	63	116						
S SPRUCE	223.6	111.1		13	26						
TOTAL	55.9	27.8	181	250	319	154	39	17			
CL: 68.1 %	COEFF	NET BF/ACRE					# OF PLOTS REQ.		INF. POP.		
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15			
DOUG FIR	105.3	52.3	3,886	8,155	12,424						
WHEMLOCK	173.2	86.1	800	5,744	10,687						
S SPRUCE	223.6	111.1		530	1,120						
TOTAL	58.9	29.2	10,209	14,429	18,648	171	43	19			
CL: 68.1 %	COEFF	V-BAR/ACRE					# OF PLOTS REQ.		INF. POP.		
SD: 1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15			
DOUG FIR			22	47	71						
WHEMLOCK			13	92	171						
S SPRUCE	223.6	111.1		42	90						
TOTAL	440.8	219.0	41	58	75	9,595	2,399	1,066			

T028 R015 S16 TU4										T028 R015 S16 TU4				
Twp	Rge	Sec	Tract	Type	Acres	Plots	Sample Trees	CuFt	BdFt					
028	015	16	BITE	U4	29.00	19	37	S	W					


Spp	So	Gr	%	Bd. Ft. per Acre			Total	Percent Net Board Foot Volume								Average Log				Logs Per /Acre
								Log Scale Dia.				Log Length				Ln	Dia	Bd	CF/Lf	
								5-7	8-11	12-15	16+	12-20	21-30	31-35	36-99					
DF	D	2S	35	15.3	7,399	6,265	182	48	52					100	40	11	160	1.46	39.1	
DF	D	3S	44	10.8	8,429	7,522	218	14	86				2	2	97	35	9	92	0.77	81.9
DF	D	4S	18	14.6	3,695	3,157	92	100				7	35	26	32	29	5	29	0.35	107.3
DF	D	UT	3		480	480	14	100				30	70			13	5	12	0.25	40.6
DF	Totals		59	12.9	20,004	17,425	505	27	54	19		2	9	5	84	30	7	65	0.71	268.9
WH	D	2S	16	10.4	1,734	1,553	45		38	62				100	40	12	172	1.37	9.0	
WH	D	3S	65	4.8	6,710	6,385	185	4	96					4	96	36	10	118	0.82	54.3
WH	D	4S	17	6.5	1,780	1,665	48	100				8	39	32	21	28	5	28	0.35	59.0
WH	D	UT	2		102	102	3	100				100				16	6	20	0.43	5.1
WH	Totals		33	6.0	10,325	9,705	281	21	69	10		2	7	8	83	32	7	76	0.67	127.4
SS	D	2S	61	16.9	1,594	1,324	38			100				100	40	14	241	1.97	5.5	
SS	D	3S	30	10.7	722	645	19	16	84				16	84	33	8	62	0.64	10.3	
SS	D	4S	9		192	192	6	100				40	60			17	6	18	0.41	10.6
SS	Totals		7	13.8	2,509	2,162	63	14	25	61		4	10		86	28	8	82	0.98	26.4
Type Totals				10.8	32,838	29,292	849	24	57	19		2	8	6	84	30	7	69	0.71	422.7

TC TSTATS				STATISTICS				PAGE	1		
				PROJECT	BITE		DATE	5/13/2019			
TWP	RGE	SECT	TRACT	TYPE	ACRES	PLOTS	TREES	CuFt	BdFt		
028	015	16	BITE	U4	29.00	19	91	S	W		
		PLOTS	TREES	TREES PER PLOT	ESTIMATED TOTAL TREES	PERCENT SAMPLE TREES					
TOTAL		19	91	4.8							
CRUISE		9	37	4.1	6,296	.6					
DBH COUNT REFOREST COUNT		10	54	5.4							
BLANKS											
100 %											
STAND SUMMARY											
	SAMPLE TREES	TREES /ACRE	AVG DBH	BOLE LEN	REL DEN	BASAL AREA	GROSS BF/AC	NET BF/AC	GROSS CF/AC	NET CF/AC	
DOUG FIR	24	134.5	16.0	66	46.9	187.5	20,004	17,425	5,709	5,719	
WHEMLOCK	10	69.4	15.3	61	22.7	88.8	10,325	9,705	2,713	2,713	
S SPRUCE	3	13.2	17.9	60	5.4	23.0	2,509	2,162	730	730	
TOTAL	37	217.1	15.9	64	75.1	299.3	32,838	29,292	9,153	9,162	
CONFIDENCE LIMITS OF THE SAMPLE											
68.1 TIMES OUT OF 100 THE VOLUME WILL BE WITHIN THE SAMPLE ERROR											
CL:	68.1 %	COEFF	SAMPLE TREES - BF				# OF TREES REQ.		INF. POP.		
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR	42.7	8.9		140	154	167					
WHEMLOCK	36.1	12.0		134	152	170					
S SPRUCE	54.9	38.0		132	213	294					
TOTAL	42.7	7.0		147	158	169	73	18	8		
CL:	68.1 %	COEFF	TREES/ACRE				# OF PLOTS REQ.		INF. POP.		
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR	74.8	17.6		111	134	158					
WHEMLOCK	103.2	24.3		53	69	86					
S SPRUCE	225.5	53.1		6	13	20					
TOTAL	45.8	10.8		194	217	241	88	22	10		
CL:	68.1 %	COEFF	BASAL AREA/ACRE				# OF PLOTS REQ.		INF. POP.		
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR	61.9	14.6		160	188	215					
WHEMLOCK	103.1	24.3		67	89	110					
S SPRUCE	225.5	53.1		11	23	35					
TOTAL	35.2	8.3		275	299	324	52	13	6		
CL:	68.1 %	COEFF	NET BF/ACRE				# OF PLOTS REQ.		INF. POP.		
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR	63.2	14.9		14,830	17,425	20,020					
WHEMLOCK	100.5	23.7		7,406	9,705	12,004					
S SPRUCE	225.5	53.1		1,013	2,162	3,310					
TOTAL	37.6	8.9		26,695	29,292	31,888	60	15	7		
CL:	68.1 %	COEFF	V-BAR/ACRE				# OF PLOTS REQ.		INF. POP.		
SD:	1.0	VAR.%	S.E.%	LOW	AVG	HIGH	5	10	15		
DOUG FIR				79	93	107					
WHEMLOCK				83	109	135					
S SPRUCE	162.1	38.2		44	94	144					
TOTAL	250.0	58.9		89	98	107	2,637	659	293		

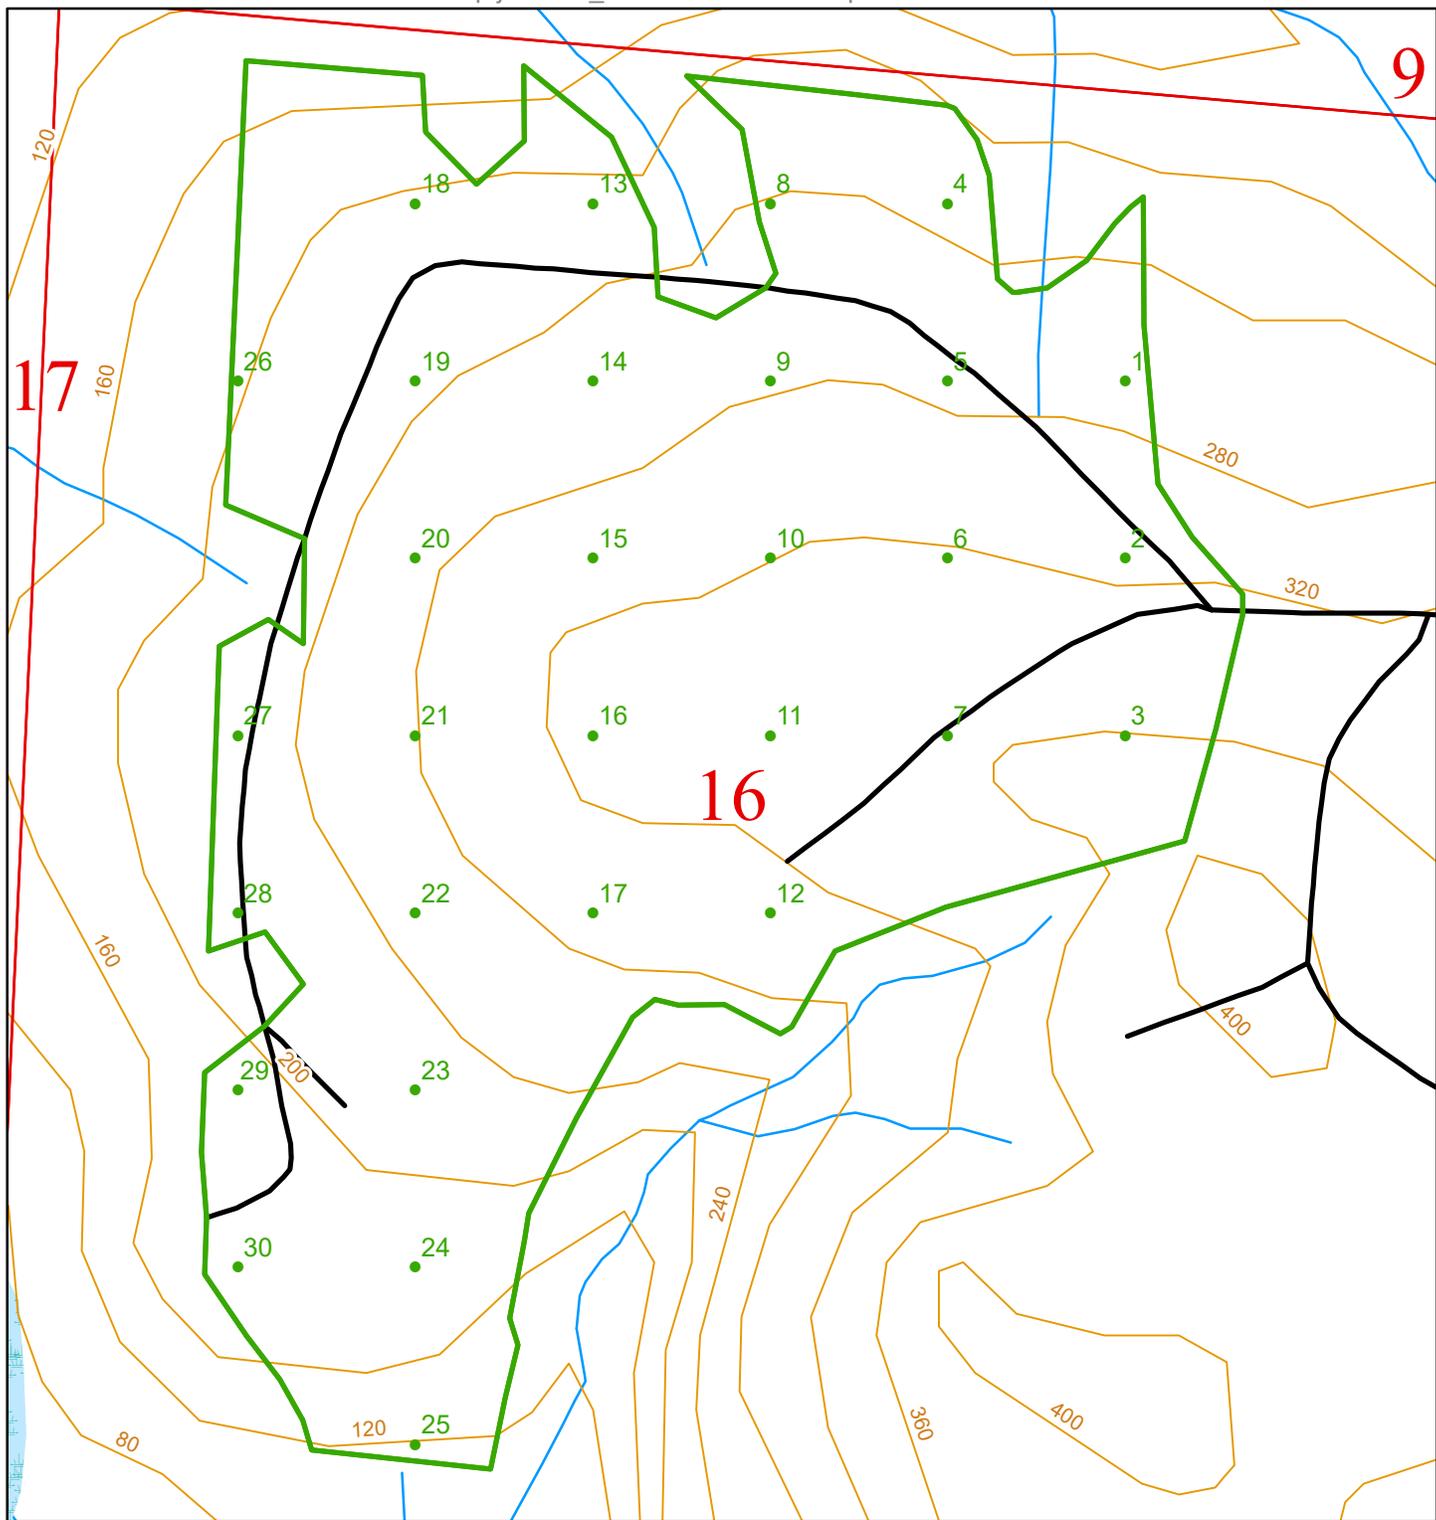

Cruiser Sample Point Locations


LAYER NAME:	unit1	Township:	T29R15W
POLY ID:	1	Total Sample Points:	30
Acres:	70	Spacing Between Points:	325
		Point Rotation Degrees:	0



Scale 1:4,200


Legend

- Sample Points
- Unit
- Public Land Survey Sections
- Contours 40-foot

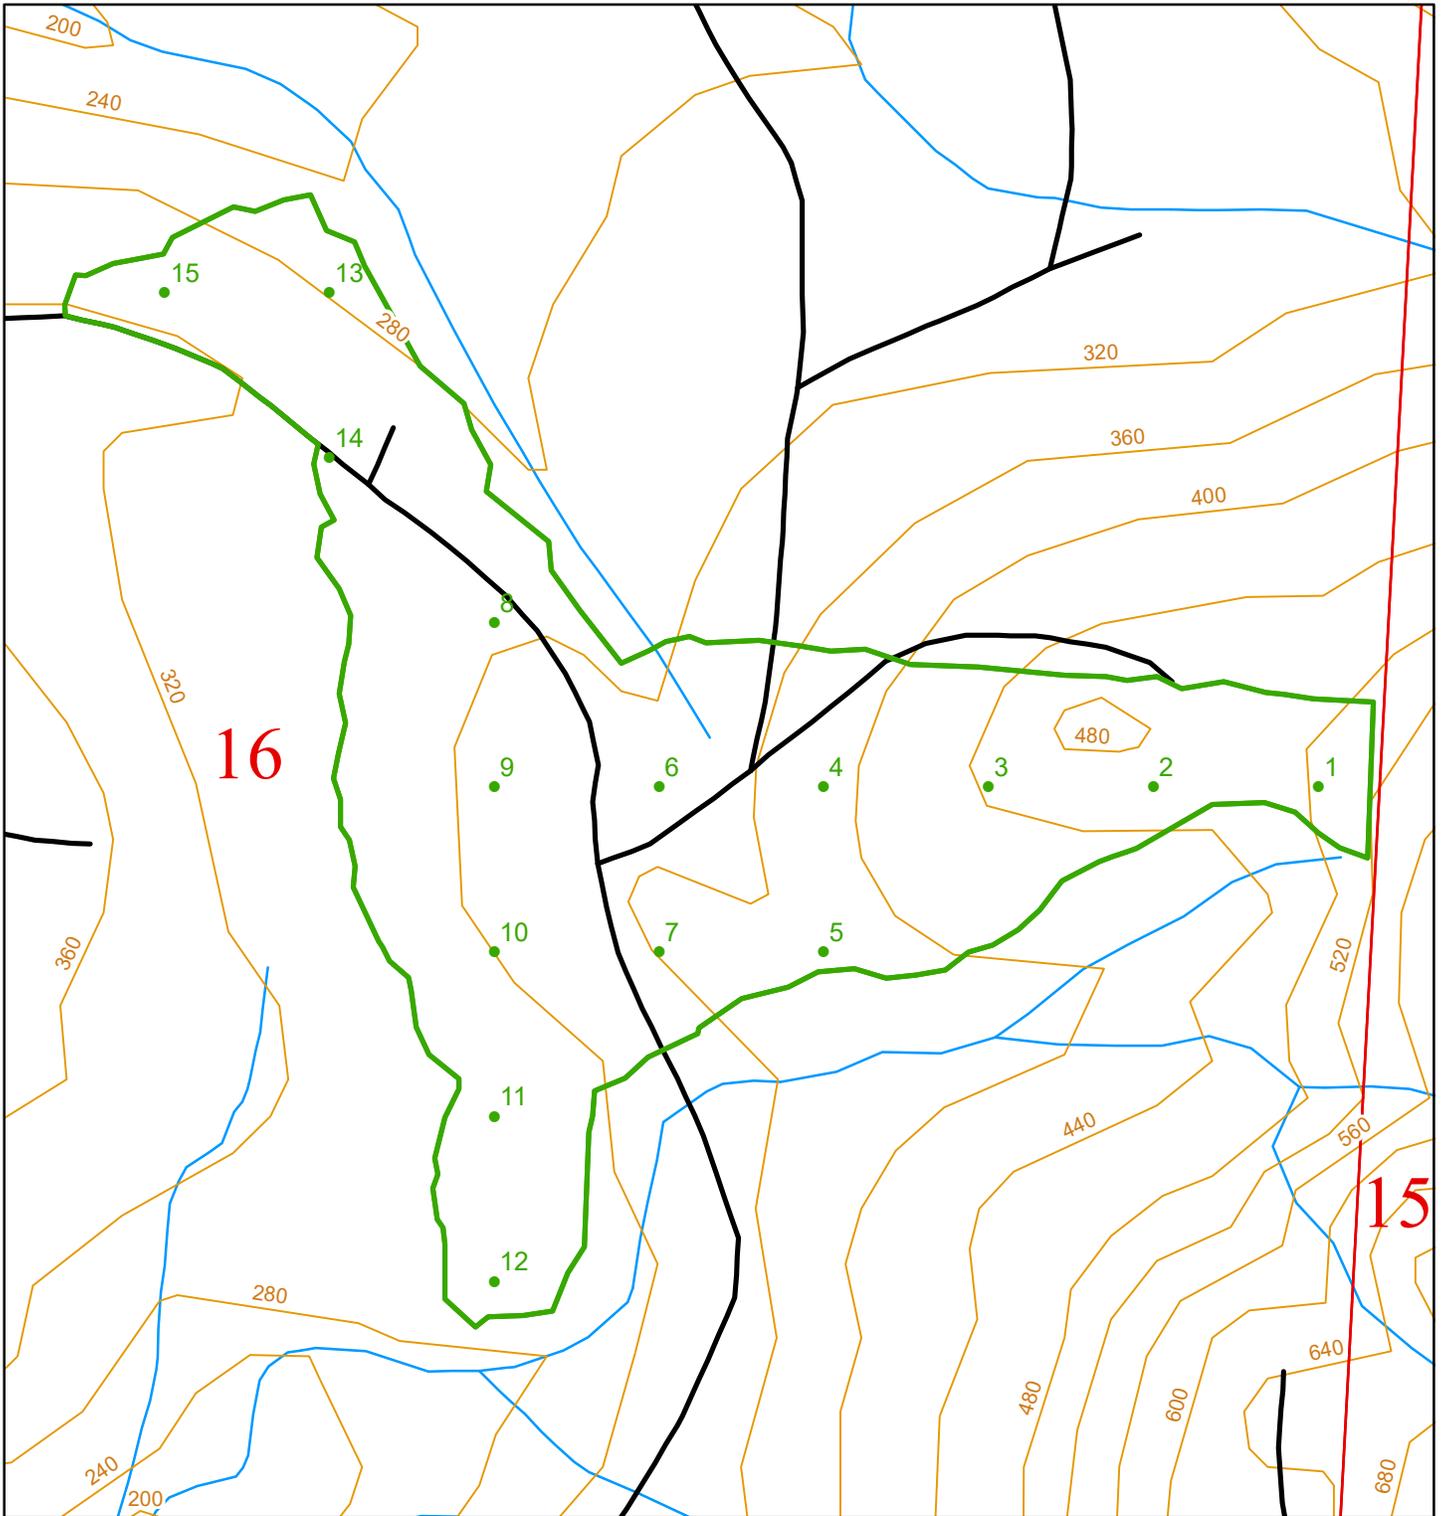

Cruiser Sample Point Locations


LAYER NAME:	unit2	Township:	T29R15W
POLY ID:	1	Total Sample Points:	15
Acres:	33	Spacing Between Points:	Width: 302 Height: 302
		Point Rotation Degrees:	0



Scale 1:4,200


Legend

- Sample Points
- Unit
- Public Land Survey Sections
- Contours 40-foot

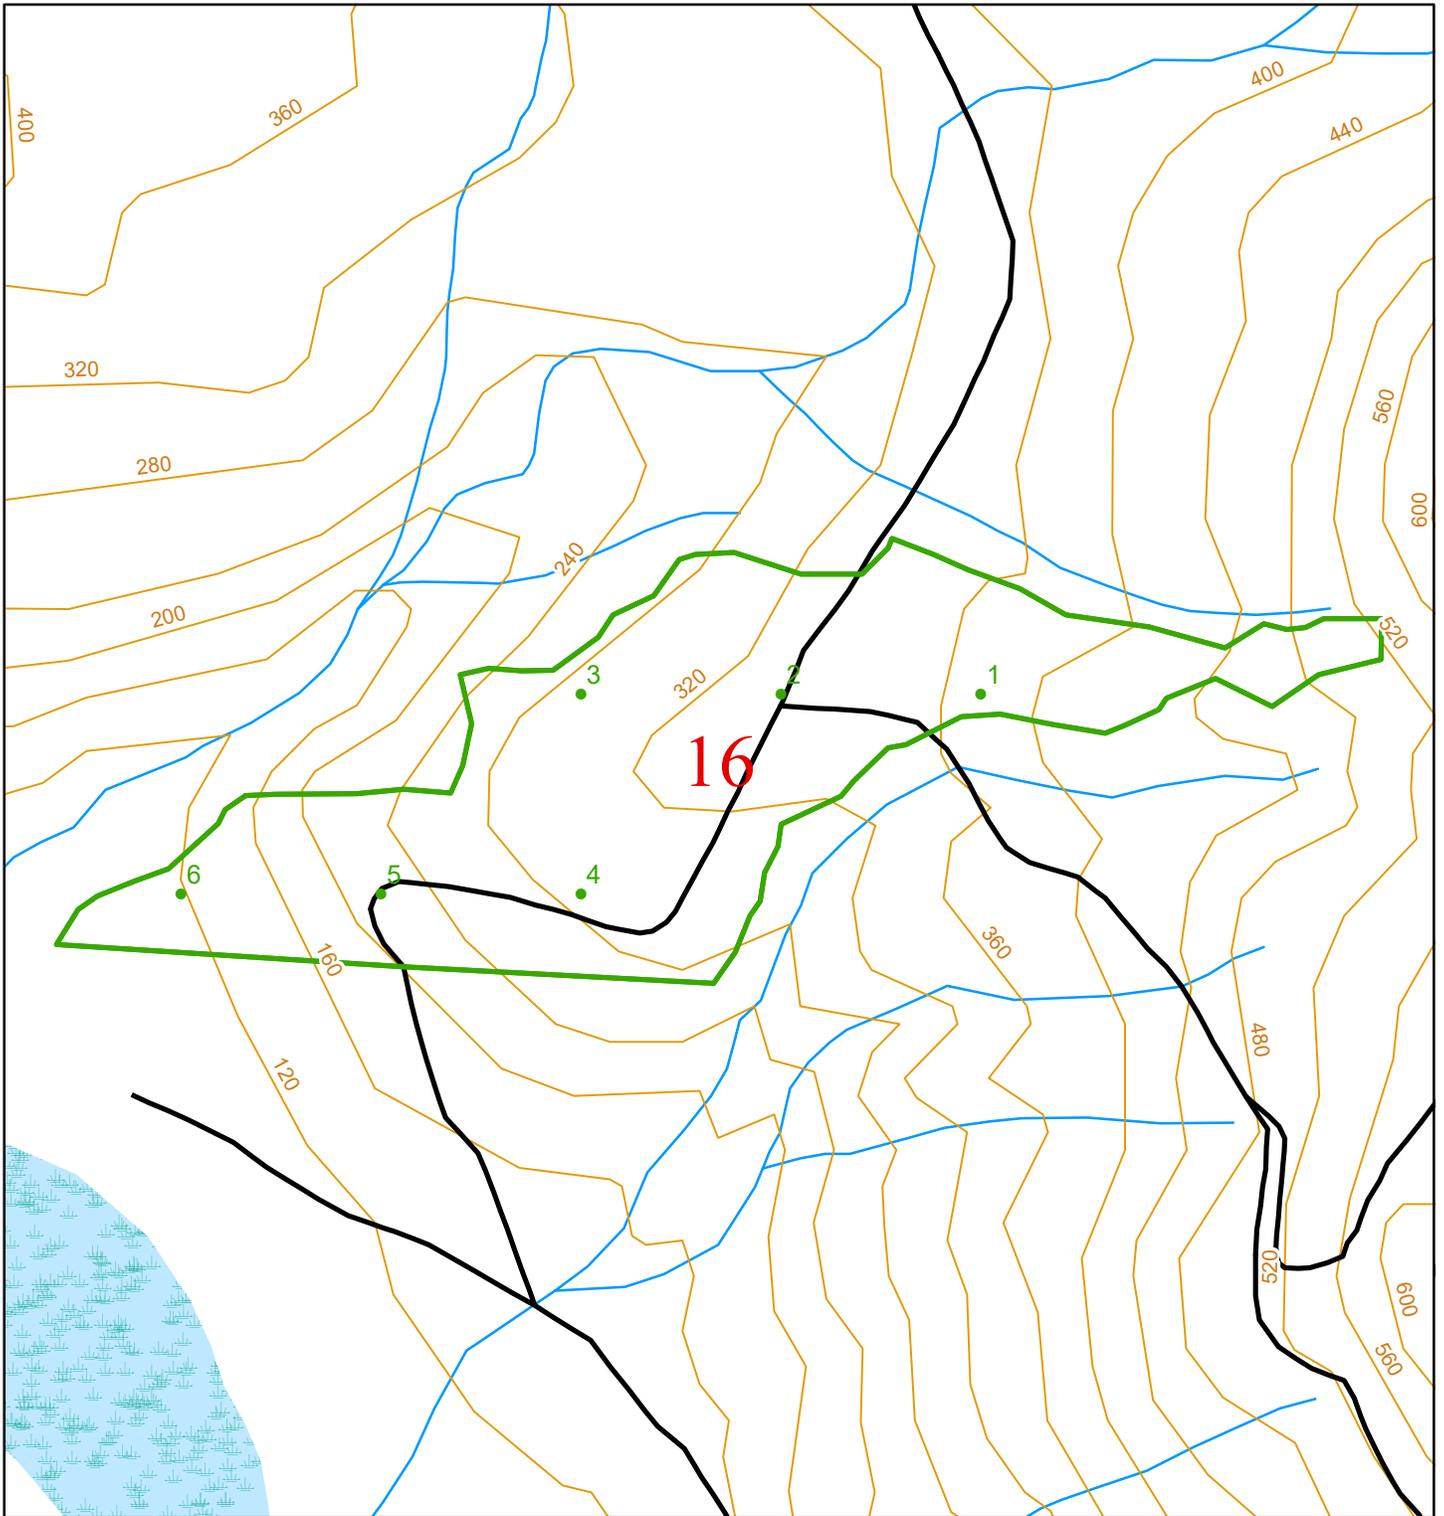

Cruiser Sample Point Locations


LAYER NAME:	unit3	Township:	T29R15W
POLY ID:	1	Total Sample Points:	6
Acres:	19	Spacing Between Points:	375
		Point Rotation Degrees:	0



Scale 1:4,300


Legend

- Sample Points
- Unit
- Public Land Survey Sections
- Contours 40-foot

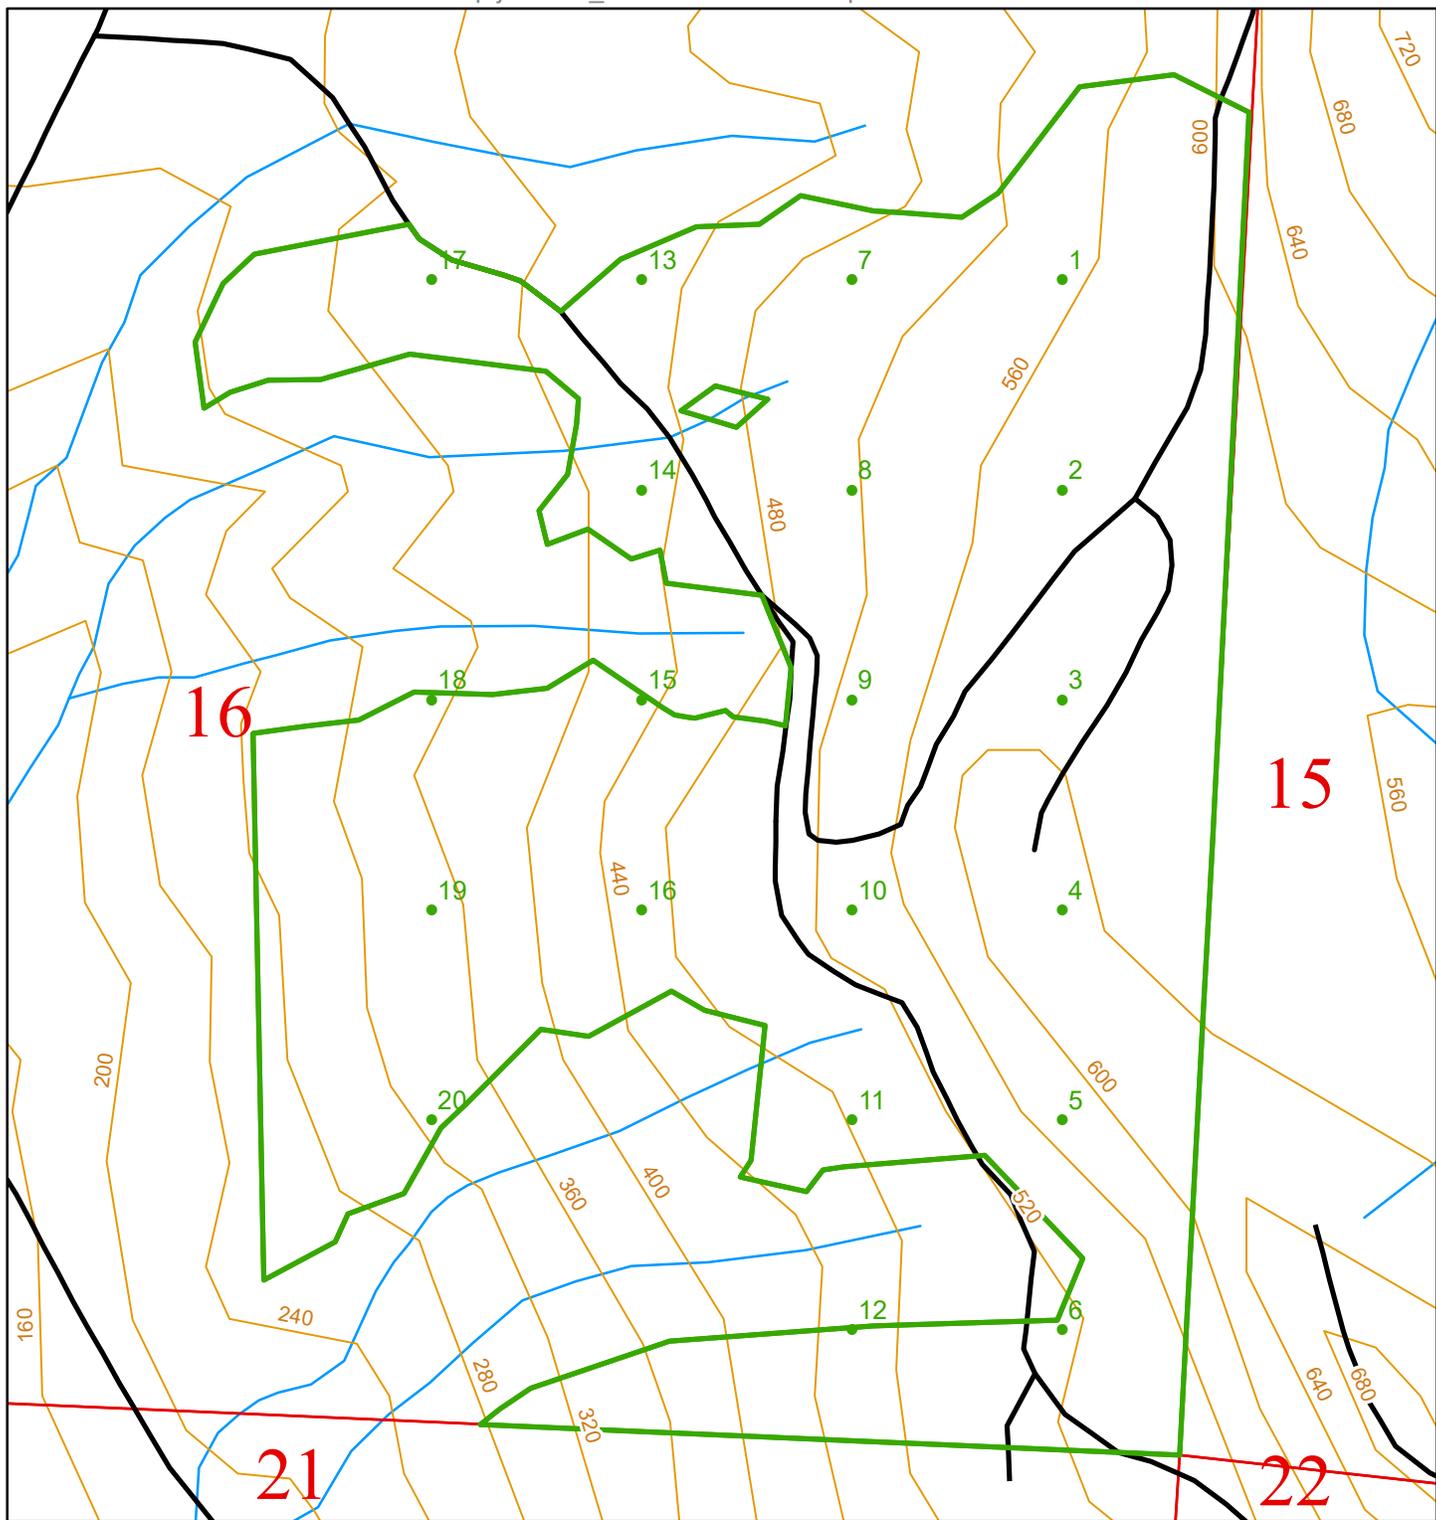

Cruiser Sample Point Locations

LAYER NAME:	unit4	Township:	T29R15W
POLY ID:	1	Total Sample Points:	20
Acres:	34	Spacing Between Points:	275
		Point Rotation Degrees:	0



Scale 1:3,000

Legend

- Sample Points
- Unit
- Public Land Survey Sections
- Contours 40-foot

Appeal Information

You have thirty (30) days to appeal this Decision and any related State Environmental Policy Act determinations to the Pollution Control Hearings Board in writing at the following addresses:

Physical address: 1111 Israel Rd. SW, Ste 301, Tumwater, WA 98501

Mailing address: P.O. BOX 40903, OLYMPIA, WA 98504-0903

Information regarding the Pollution Control Hearings Board can be found at: <http://www.eluho.wa.gov/>

At the same time you file an appeal with the Pollution Control Hearings Board, also send a copy of the appeal to the Department of Natural Resources' region office and the Office of the Attorney General at the following addresses:

Office of the Attorney General
Natural Resources Division
1125 Washington Street SE
PO Box 40100
Olympia, WA 98504-0100

And

Department Of Natural Resources
Olympic Region
411 Tillicum Lane
Forks, WA 98331

Other Applicable Laws

Operating as described in this application/notification does not ensure compliance with the Endangered Species Act, or other federal, state, or local laws.

Transfer of Forest Practices Application/Notification (WAC 222-20-010)

Use the "Notice of Transfer of Approved Forest Practices Application/Notification" form. This form is available at region offices and on the Forest Practices website: <http://www.dnr.wa.gov/businesspermits/forestpractices>. Notify DNR of new Operators within 48 hours.

Continuing Forest Land Obligations (RCW 76.09.060, RCW 76.09.070, RCW 76.09.390, and WAC 222-20-055)

Obligations include reforestation, road maintenance and abandonment plans, conversions of forest land to non-forestry use and/or harvest strategies on perennial non-fish habitat (Type Np) waters in Eastern Washington.

Before the sale or transfer of land or perpetual timber rights subject to continuing forest land obligations, the seller must notify the buyer of such an obligation on a form titled "Notice of Continuing Forest Land Obligation". The seller and buyer must both sign the "Notice of Continuing Forest Land Obligation" form and send it to the DNR Region Office for retention. This form is available at DNR region offices.

If the seller fails to notify the buyer about the continuing forest land obligation, the seller must pay the buyer's costs related to continuing forest land obligations, including all legal costs and reasonable attorneys' fees incurred by the buyer in enforcing the continuing forest land obligation against the seller.

Failure by the seller to send the required notice to the DNR at the time of sale will be prima facie evidence in an action by the buyer against the seller for costs related to the continuing forest land obligation prior to sale.

DNR affidavit of mailing:

On this day _____,	I placed in the United States mail at _____	Forks	_____	WA,
(date)		(post office location)		
postage paid, a true and accurate copy of this document. Notice of Decision FPA # _____		2616329		
_____	_____			
(Printed name)	(Signature)			

STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES


BITTEN TIMBER SALE ROAD PLAN
CLALLAM COUNTY
COAST DISTRICT

AGREEMENT NO.: 30-099254


DISTRICT ENGINEER: BILL MEHL

DATE: MARCH 31, 2020


DRAWN & COMPILED BY: CRAIG MAGNUSON

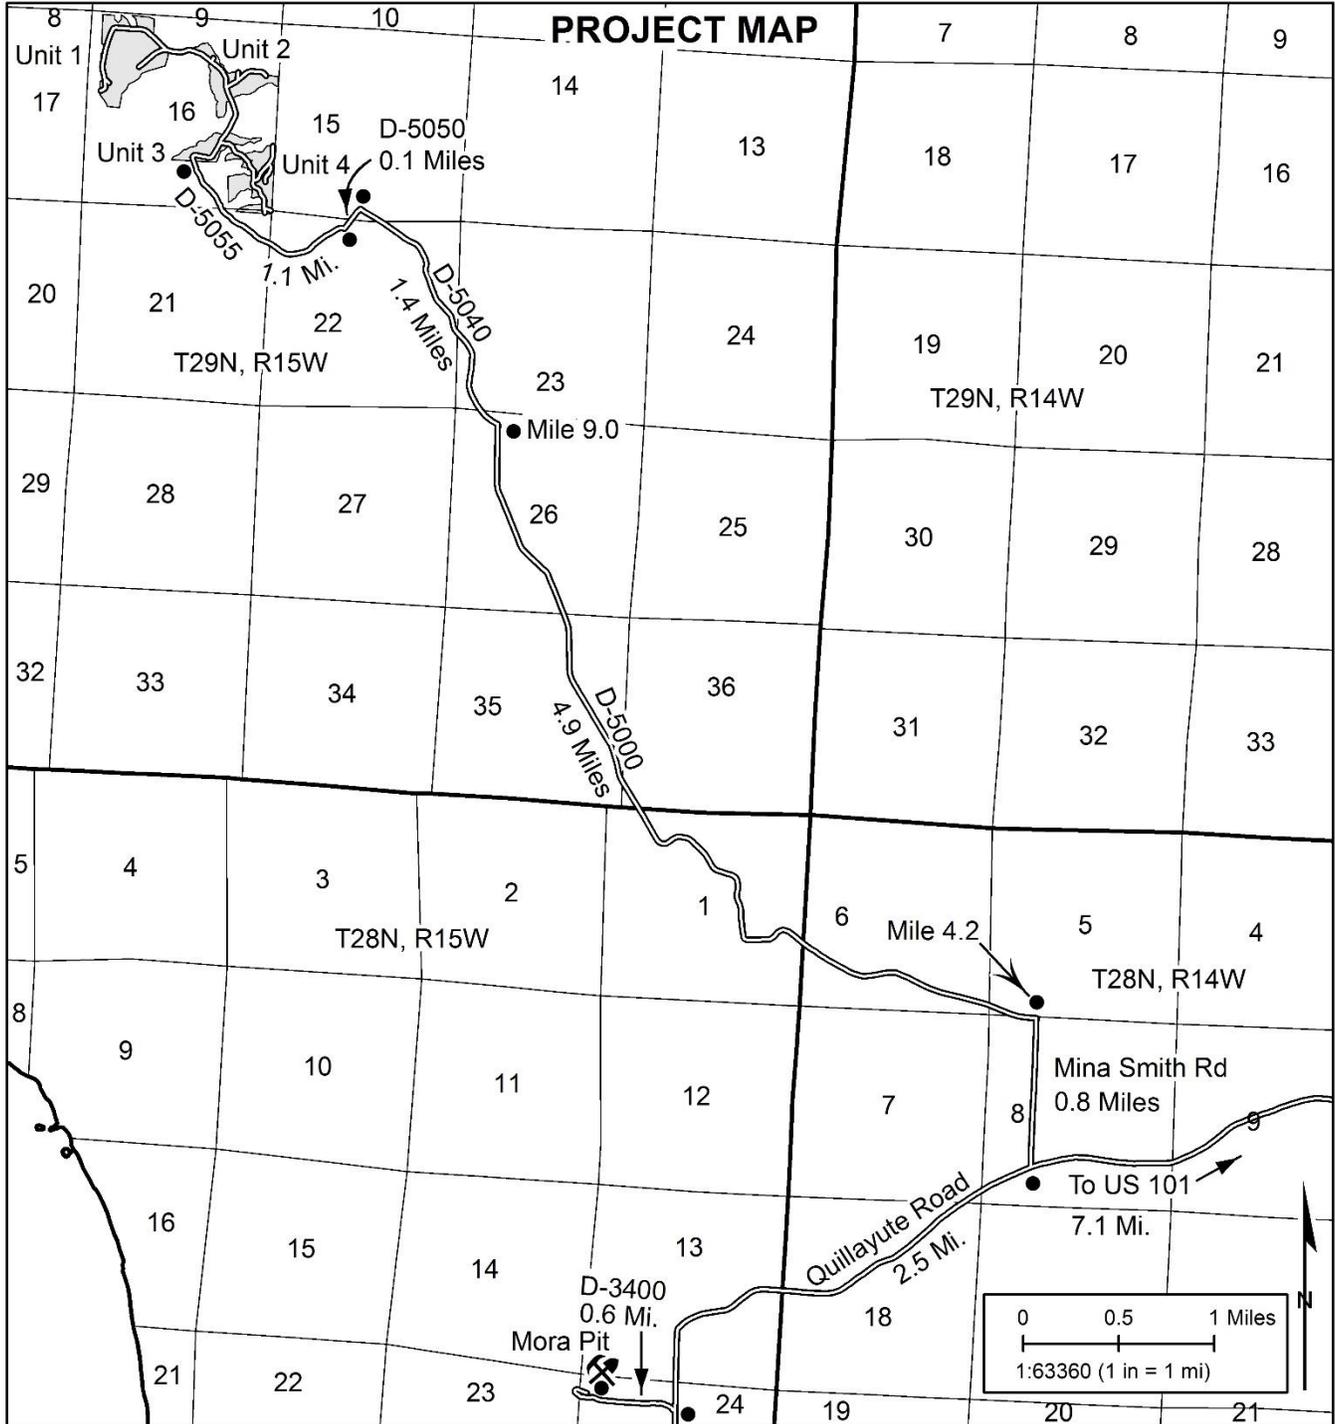

PLAN VIEW

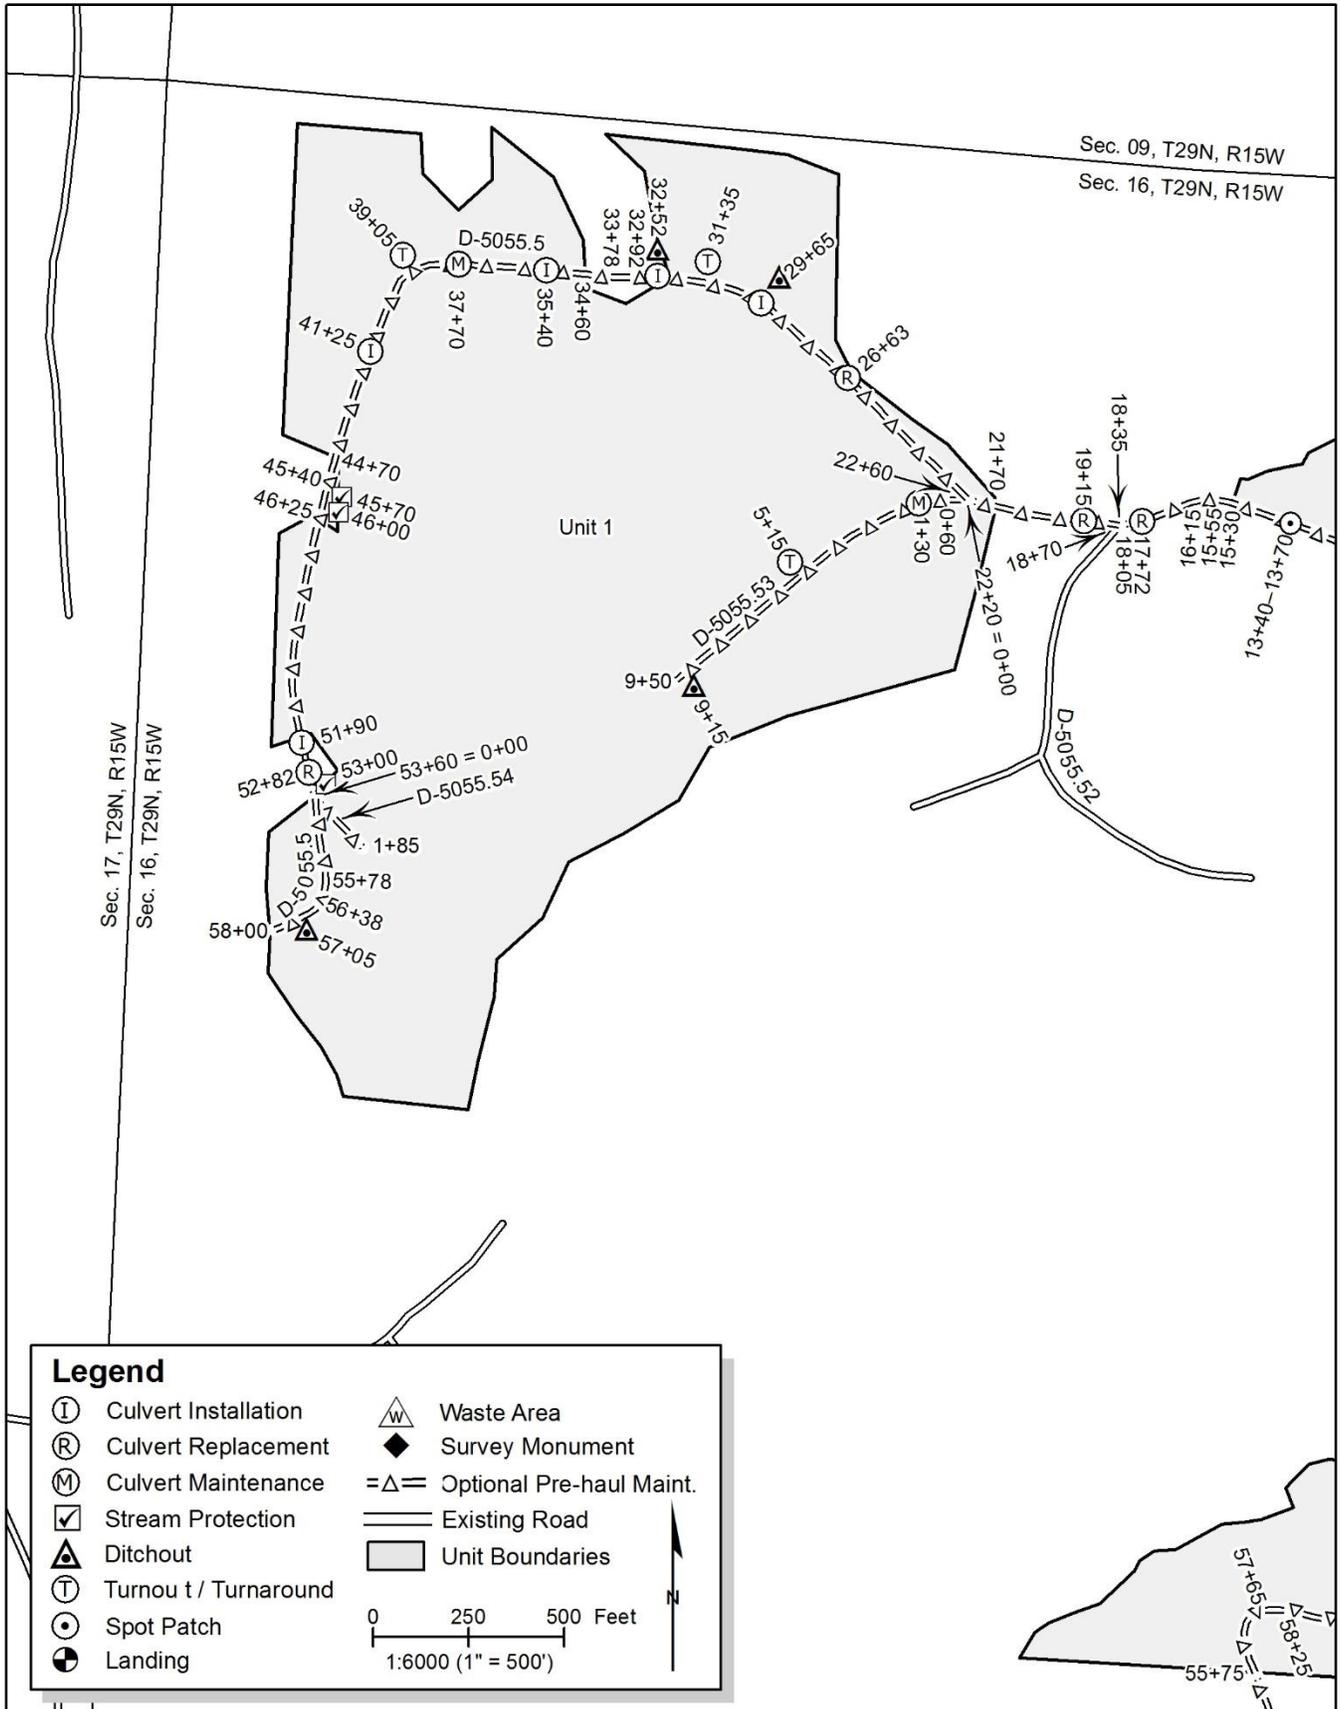


PLAN VIEW

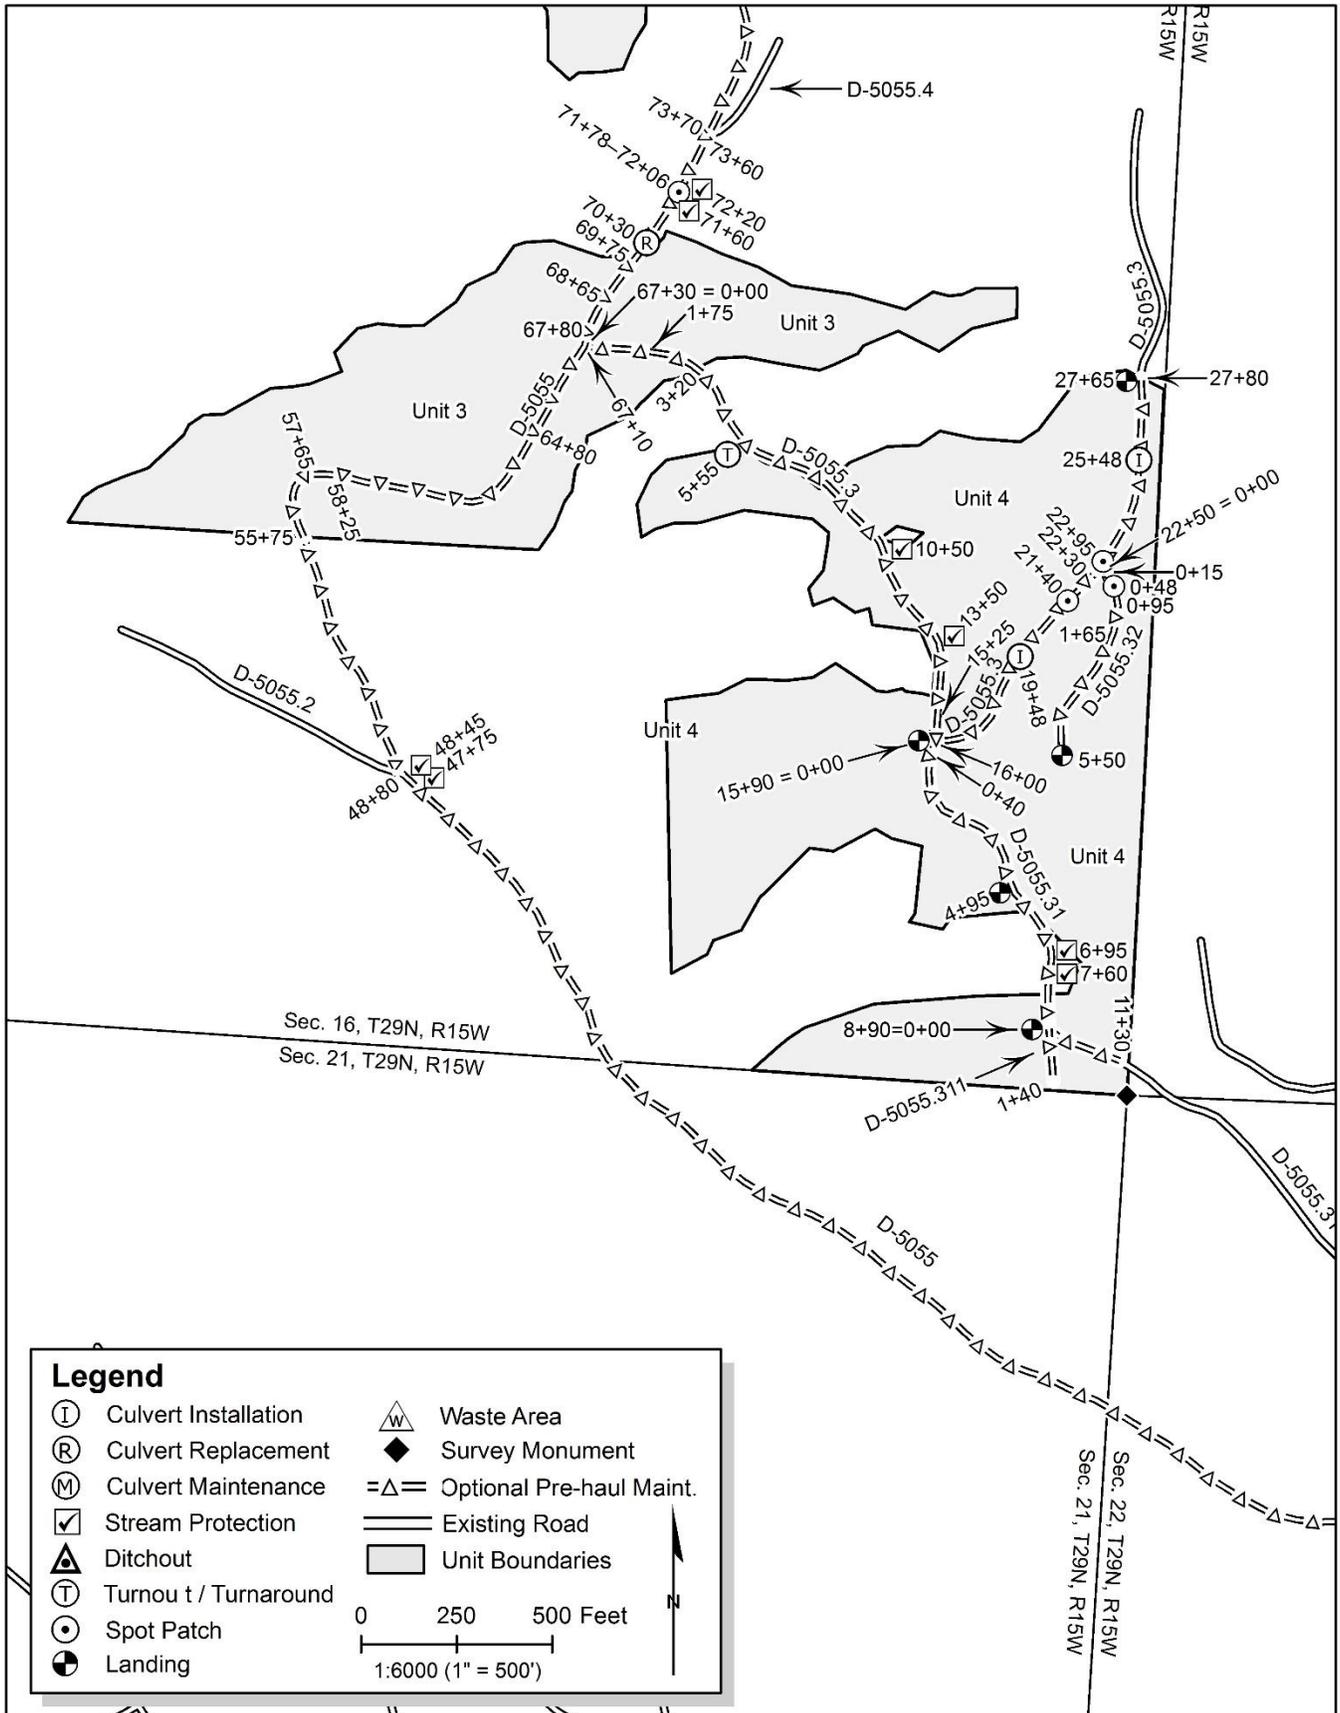


Legend

- | | | | |
|---|----------------------|--------------------|--------------------------|
| ⓘ | Culvert Installation | △ | Waste Area |
| Ⓡ | Culvert Replacement | ◆ | Survey Monument |
| Ⓜ | Culvert Maintenance | =△= | Optional Pre-haul Maint. |
| ☑ | Stream Protection | — | Existing Road |
| △ | Ditchout | ▭ | Unit Boundaries |
| Ⓣ | Turnout / Turnaround | 0 250 500 Feet | |
| ⊙ | Spot Patch | 1:6000 (1" = 500') | |
| ⊙ | Landing | | |


PLAN VIEW

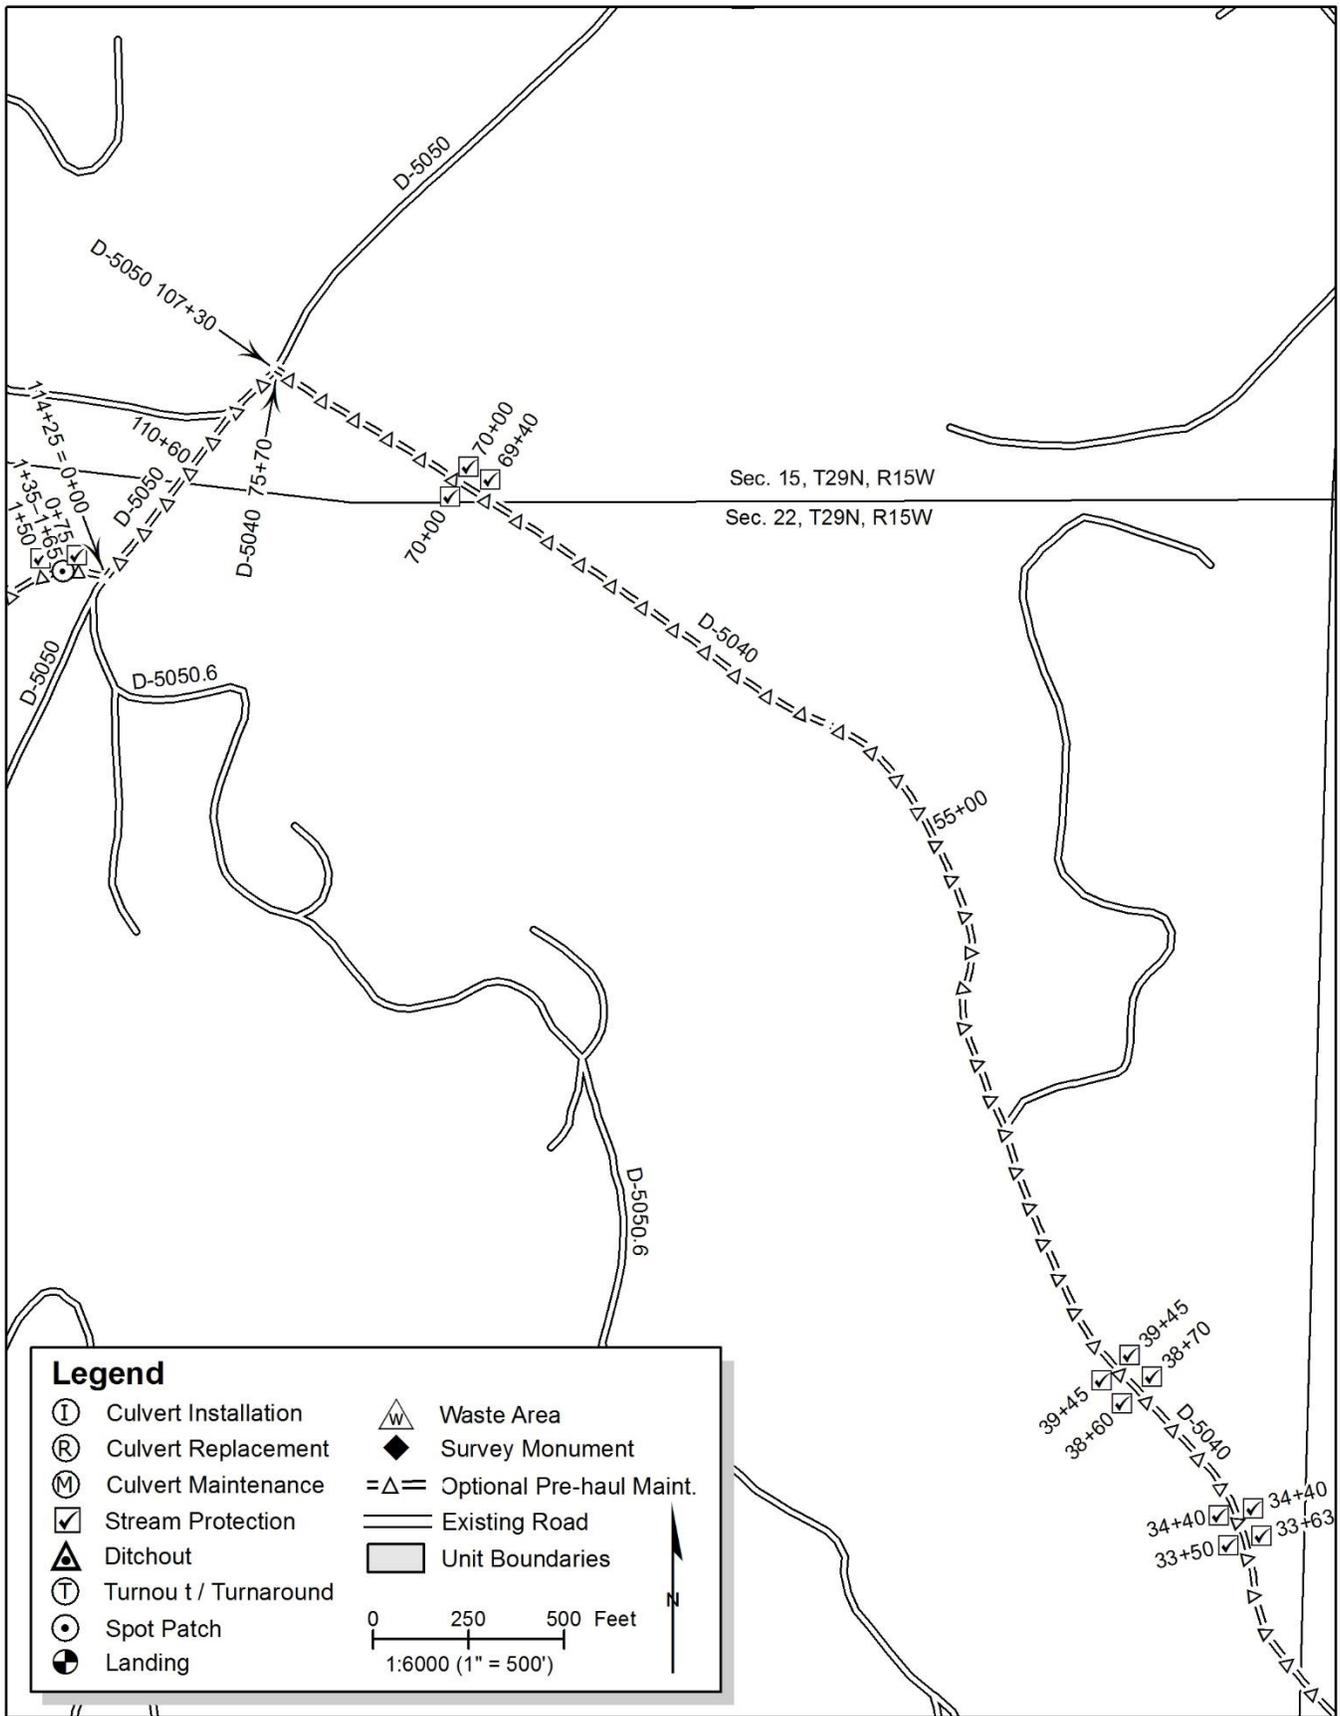

PLAN VIEW

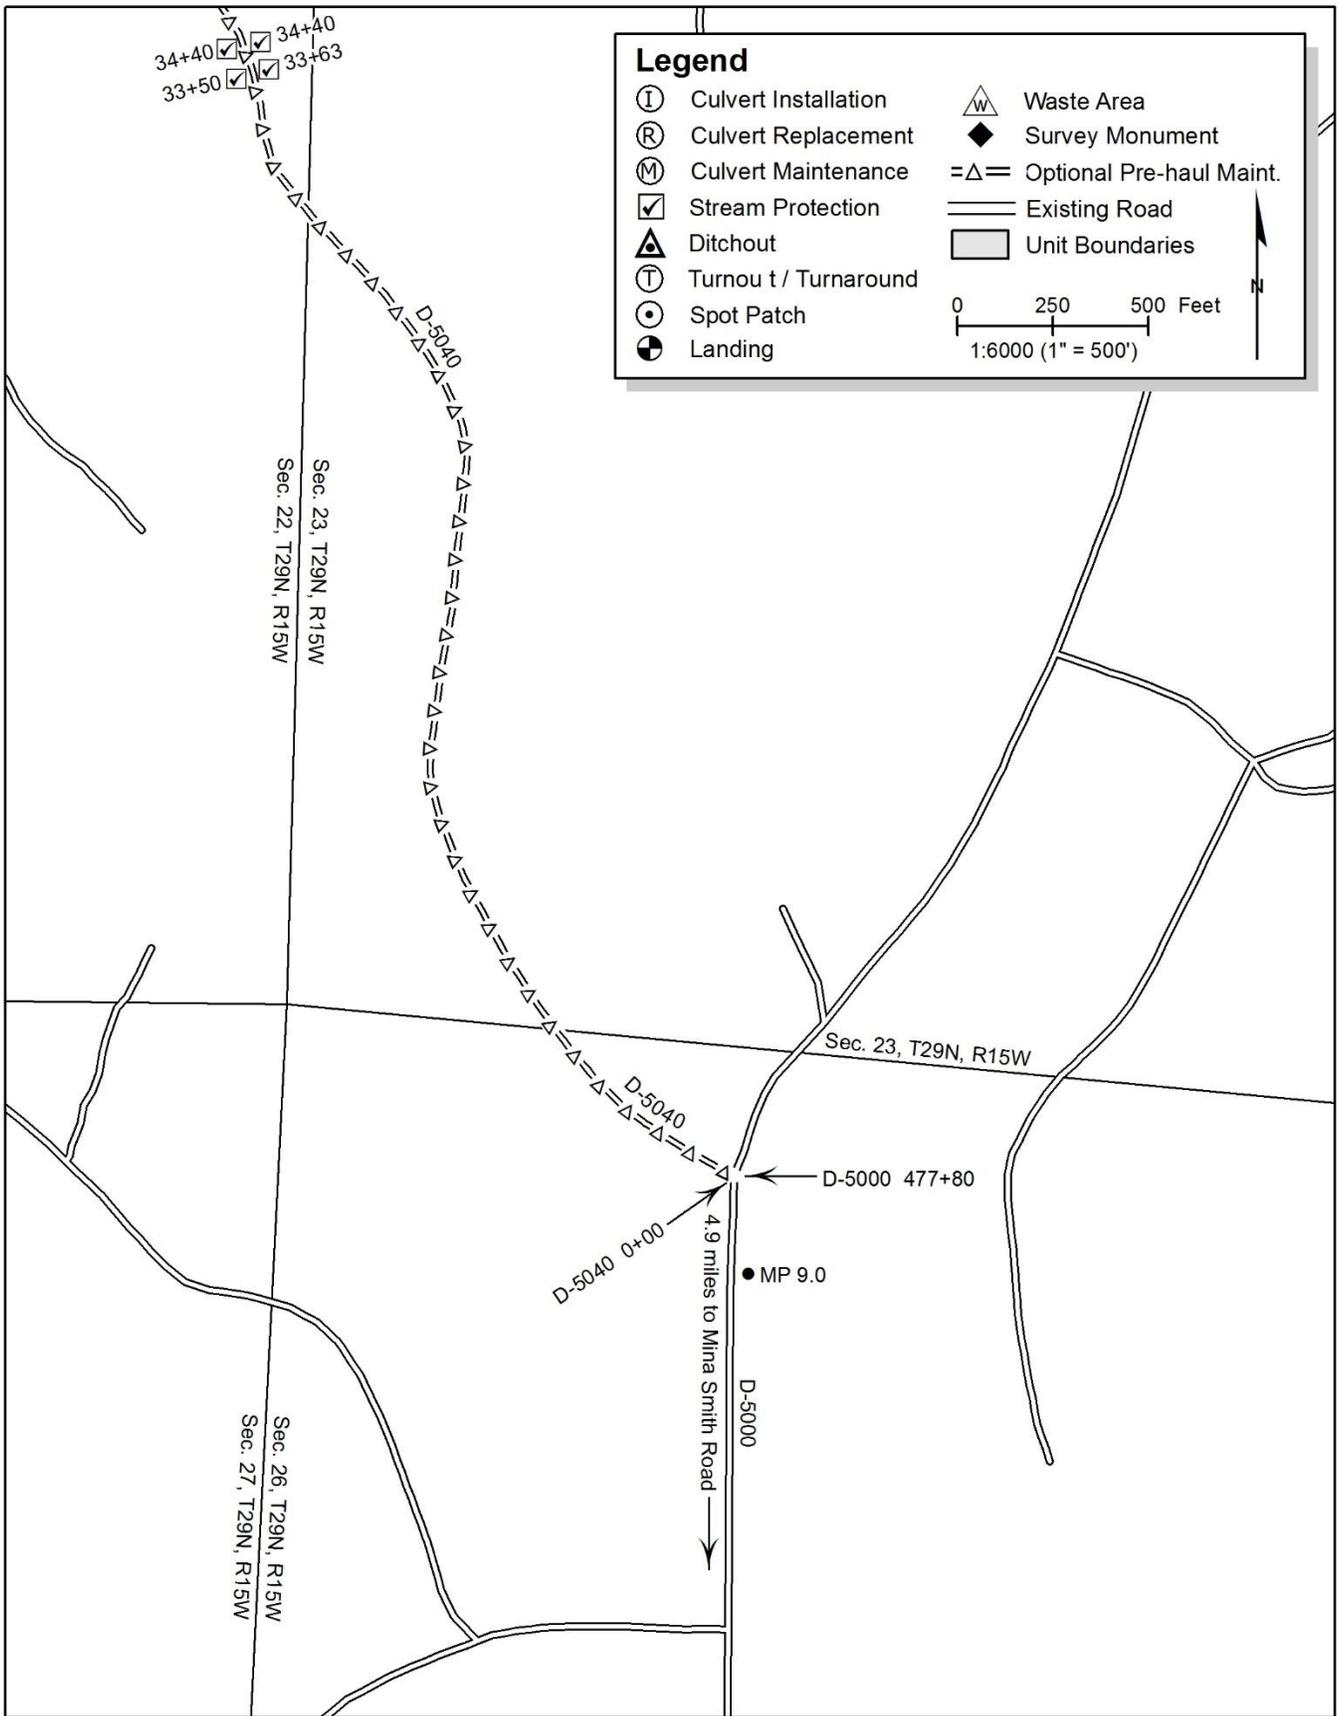

PLAN VIEW

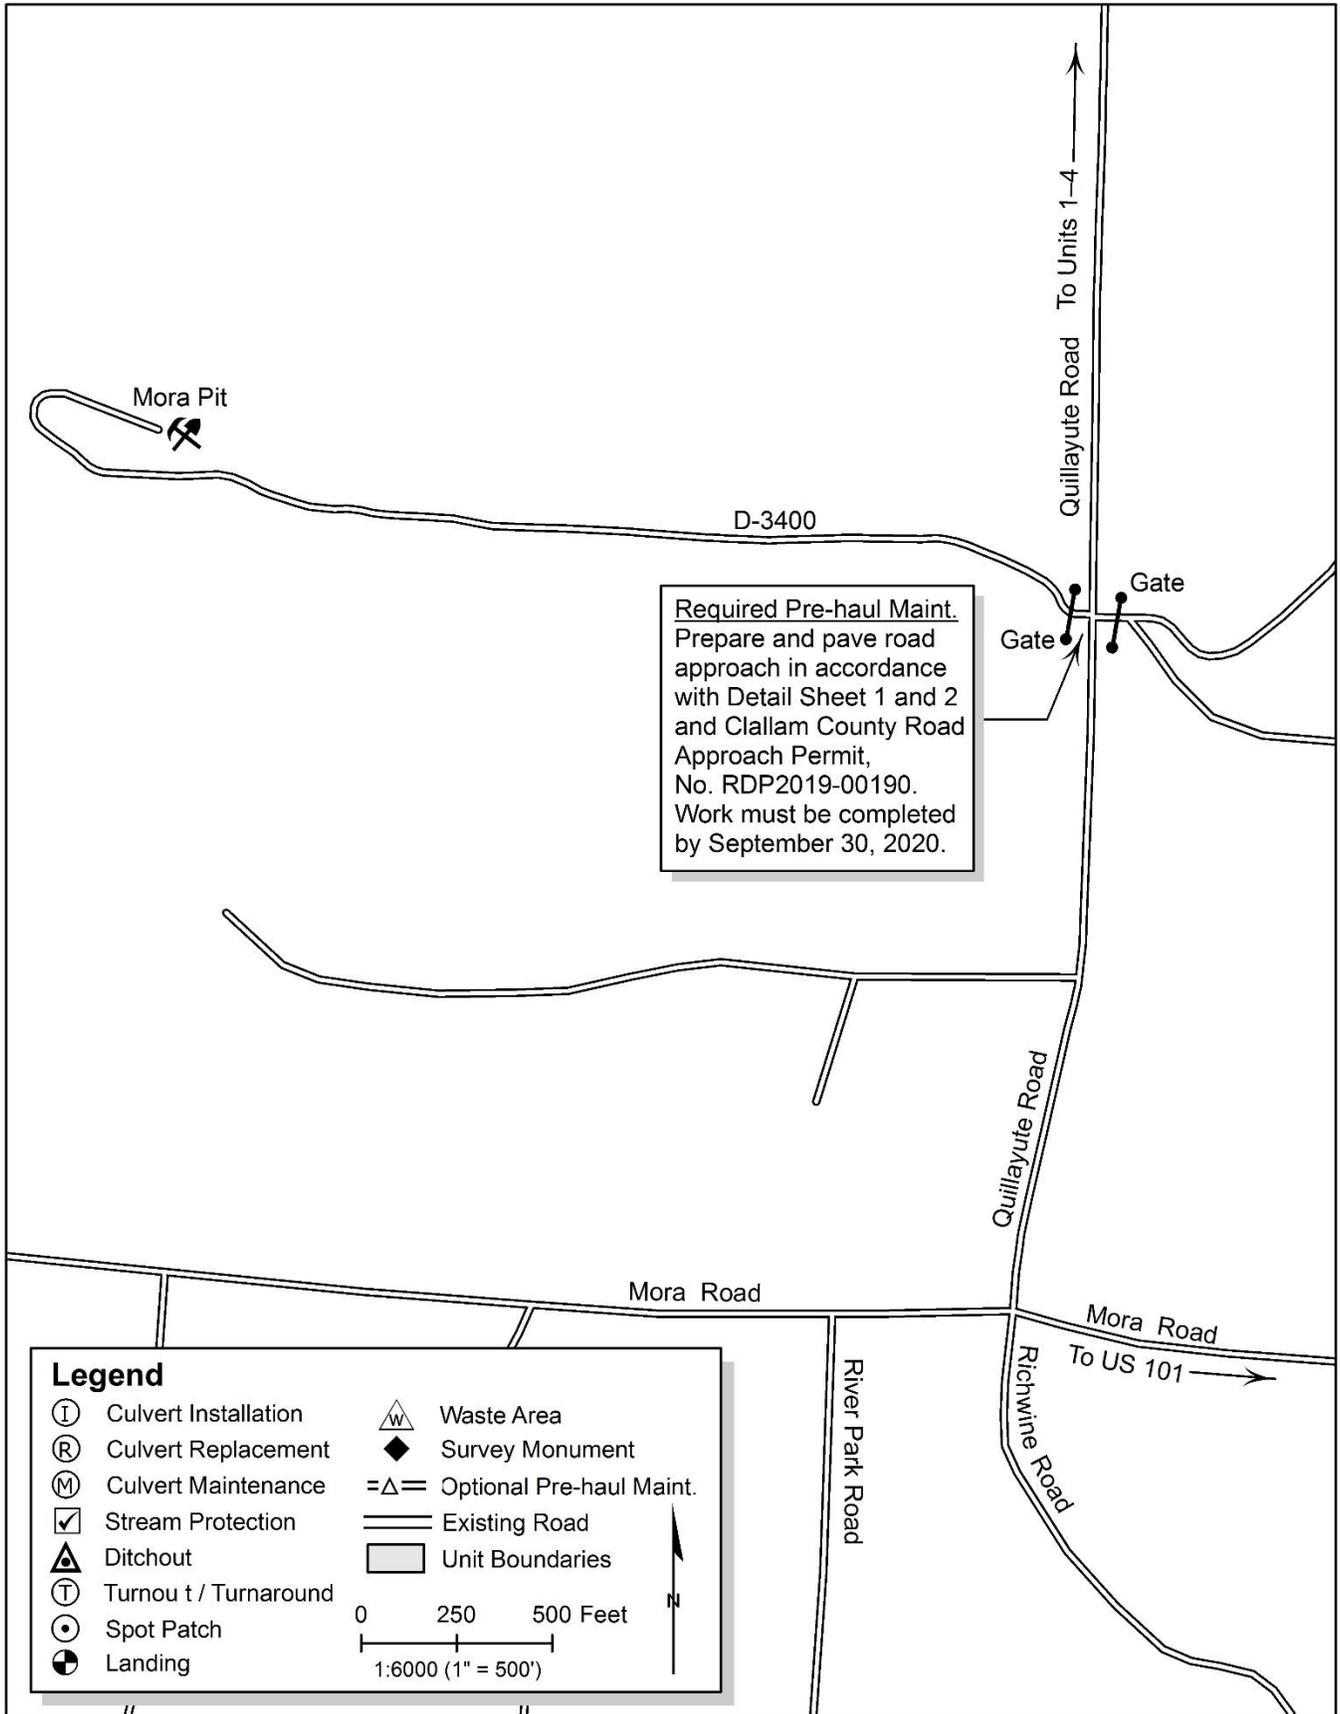

SECTION 0 – SCOPE OF PROJECT

0-1 ROAD PLAN SCOPE

Clauses in this road plan apply to all road related work, including landings and rock source development, unless otherwise noted.

0-2 REQUIRED ROADS

The specified work on the following roads is required.

<u>Road</u>	<u>Stations</u>	<u>Type</u>
D-3400	0.50	Pre-haul Maintenance

0-3 OPTIONAL ROADS

The specified work on the following roads is not required. Any optional roads built by the Purchaser must meet all the specifications in the road plan.

<u>Road</u>	<u>Stations</u>	<u>Type</u>
D-5040	75.70	Pre-haul Maintenance
D-5050	6.95	Pre-haul Maintenance
D-5055	90.30	Pre-haul Maintenance
D-5055.3	27.80	Pre-haul Maintenance
D-5055.31	11.30	Pre-haul Maintenance
D-5055.311	1.40	Pre-haul Maintenance
D-5055.32	5.50	Pre-haul Maintenance
D-5055.5	58.00	Pre-haul Maintenance
D-5055.51	1.10	Pre-haul Maintenance
D-5055.53	9.50	Pre-haul Maintenance
D-5055.54	1.85	Pre-haul Maintenance
D-5055.6	9.30	Pre-haul Maintenance

0-6 PRE-HAUL MAINTENANCE

This project includes, but is not limited to the following prehaul maintenance requirements:

<u>Road</u>	<u>Stations</u>	<u>Requirements</u>
D-5040	0+00 – 75+70	Install sediment controls in accordance with Clause 8-1. Grade and shape existing road surface in accordance with Clause 2-5. Maintain silt fences in ditches in accordance with Clause 2-8.
D-5050	107+30 – 114+25	Grade and shape existing road surface in accordance with Clause 2-5.
D-5055	0+00 – 90+30	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Replace culvert in accordance with Culvert List. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66. Install sediment controls in accordance with Clause 8-1. Grade, shape, and compact existing road surface in accordance with Clause 2-5. Maintain silt fences in ditches in accordance with Clause 2-8.

D-5055.3	0+00 – 27+80	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Install culverts in accordance with Culvert List. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66. Install sediment controls in accordance with Clause 8-1. Grade, shape, and compact existing road surface in accordance with Clause 2-5. Maintain silt fences in ditches in accordance with Clause 2-8.
D-5055.31	0+00 – 11+30	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66. Install sediment controls in accordance with Clause 8-1. Grade, shape, and compact existing road surface in accordance with Clause 2-5. Maintain silt fences in ditches in accordance with Clause 2-8.
D-5055.311	0+00 – 1+40	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66.
D-5055.32	0+00 – 5+50	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66.
D-5055.5	0+00 – 58+00	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Construct ditchouts in accordance with Clause 4-29. Install, replace, and maintain culverts in accordance with Culvert List. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66. Install sediment controls in accordance with Clause 8-1. Grade, shape, and compact existing road surface in accordance with Clause 2-5. Maintain silt fences in ditches in accordance with Clause 2-8.
D-5055.51	0+00 – 1+10	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66.
D-5055.53	0+00 – 9+50	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of

		in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Construct ditchout in accordance with Clause 4-29. Maintain culvert in accordance with Culvert List. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66.
D-5055.54	0+00 – 1+85	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66.
D-5055.6	0+00 – 9+30	Remove vegetative material with a minimum loss of rock in accordance with Clause 2-9 and dispose of in accordance with Clause 3-23. Clean out and/or construct ditches in accordance with Clause 2-7. Construct ditchout in accordance with Clause 4-29. Install culvert in accordance with Culvert List. Install culvert in accordance with Culvert List. Apply rock in accordance with Rock List. Compact rock in accordance with Compaction List and Clause 4-66.
D-3400	0+00 – 0+50	Excavate, reshape, and remove existing road surface to a depth sufficient to accommodate paving, as shown on Road Approach Detail Sheet 1 and 2 and as required by Clallam County Road Approach Permit, No. RDP2019-00190. Construct ditches in accordance with Clause 4-25, Typical Section Sheet, and as shown on Road Approach Detail Sheet 1 and 2. Apply Crushed Surface Top Course (CSTC) rock in accordance with Rock List. Compact CSTC rock to a depth of 2 inches in accordance with Compaction List and Clause 4-66 and fine grade for best possible drainage, in accordance with Clause 2-5. Pave road approach in accordance with Clause 6-91, Clause 6-94, Clause 10-35, and as shown on Road Approach Detail Sheet 1 and 2 and as required by Clallam County Road Approach Permit, No. RDP2019-00190. Required paving shall be completed by September 30, 2020, in accordance with Clause 1-20.
Total Stations:	299.20	

Maintenance includes, but is not limited to:

Brushing right-of-way, right-of-way debris disposal, cleaning ditches, constructing ditches, installing additional culverts, widening road segments, constructing headwalls, cleaning culvert inlets and outlets, cross drain culvert replacement, installing erosion control materials and sediment removal structures, spot rocking, grading and shaping existing road surface and turnouts, constructing additional turnouts, compaction of road surface, application of rock, acquisition and application of grass seed and hay.

0-7 POST-HAUL MAINTENANCE

This project includes post-haul road maintenance listed in Clause 9-5 POST-HAUL MAINTENANCE.

0-13 STRUCTURES

The Purchaser shall acquire and install all structures. Requirements for these structures are listed in Section 7 Structures.

SECTION 1 – GENERAL

1-1 ROAD PLAN CHANGES

If the Purchaser desires a change from this Road Plan including, but not limited to relocation, extension, change in design, or adding roads; a revised road plan shall be submitted, in writing, to the Contract Administrator for consideration. The State must approve the submitted plans before road work begins.

1-2 UNFORESEEN CONDITIONS

Quantities established in this road plan are minimum acceptable values. Additional quantities required by the state due to unforeseen conditions, or Purchaser's choice of construction season or techniques will be at the Purchaser's expense. Unforeseen conditions include, but are not limited to, solid subsurface rock, subsurface springs, saturated ground, and unstable soils.

1-3 ROAD DIMENSIONS

Unless controlled by construction stakes or design data (plan, profile, and cross-sections), road work shall be performed in accordance with the dimensions shown on the Typical Section Sheet and the specifications within this Road Plan.

1-5 DESIGN DATA

Design data is available upon request at the Department of Natural Resources Olympic Region Office in Forks, WA.

1-6 ORDER OF PRECEDENCE

Any conflict or inconsistency in this Road Plan shall be resolved by giving the documents precedence in the following order:

1. Addenda.
2. Designs or Plans. On designs and plans, figured dimensions shall take precedence over scaled dimensions.
3. Road Plan Clauses.
4. Typical Section Sheet.
5. Standard Lists.
6. Standard Details.

In case of any ambiguity or dispute over interpreting the Road Plan, the Contract Administrator's or designee's decision will be final.

1-7 TEMPORARY ROAD CLOSURE

The Purchaser shall notify the Contract Administrator a minimum of 5 calendar days before the closure of any road. Road work shall not close any road for more than 3 consecutive days.

1-8 REPAIR OR REPLACEMENT OF DAMAGED MATERIALS

The Purchaser is responsible for the repair or replacement of all materials, roadway infrastructure, and road components damaged during roadwork or operation activities. Repairs and replacements shall be directed by the Contract Administrator. Repairs to structural materials will be made according to the manufacturer’s recommendation, and shall not begin without written approval from the Contract Administrator.

1-9 DAMAGED METALLIC COATING

Any damaged galvanized or aluminized coating on existing or new bridge components, culverts, downspouts, and flumes must be cleaned and treated with a minimum of two coats of zinc rich paint.

1-10 WSDOT STANDARD SPECIFICATION REFERENCE

References in this road plan to “WSDOT Standard Specifications” mean the Washington State Department of Transportation’s Standard Specifications for Road, Bridge, and Municipal Construction 2018 (M41-10).

1-12 SURVEY MONUMENTS

At no time during construction, reconstruction, or maintenance shall survey monuments, witness trees, or bearing trees be disturbed or damaged. If damaged or disturbed, Purchaser shall hire a licensed land surveyor to repair, replace, and/or reset them.

1-14 NON-SALE ASSOCIATED CLOSURE

Culvert and fill replacement work is currently scheduled to take place on the D-5055 road sometime during the hydraulic season of 2022, which will result in the road being closed between STA 71+60 and STA 80+20 for up to 2 weeks at a time. State shall give at least 2 weeks notice to Purchaser before closure begins.

SUBSECTION ROAD MARKING

1-15 ROAD MARKING

Road work must be in accordance with the State’s marked location. All road work is marked as follows:

- Orange ribbon and paint for construction centerlines.
- Construction stakes for everything else.

1-18 REFERENCE POINT DAMAGE

Purchaser shall reset reference points (RPs) that were moved or damaged at any time during construction to their original locations. Excavation and embankment may not proceed on road segments controlled by said RPs until Purchaser resets all moved or damaged RPs.

SUBSECTION TIMING

1-20 COMPLETE BY DATE

Purchaser shall complete pre-haul road work before the start of timber haul and by the specified date, except for removal of timber for right-of-way clearing.

<u>Road</u>	<u>Stations</u>	<u>Date</u>
D-3400	0+00 – 0+50	September 30, 2020

1-21 HAUL APPROVAL

The Purchaser shall not use roads under this Road Plan without written approval from the Contract Administrator.

1-22 WORK NOTIFICATIONS

On all roads, the Purchaser shall notify the Contract Administrator a minimum of 3 calendar days before work begins.

1-23 ROAD WORK PHASE APPROVAL

Written approval by Contract Administrator needs to be given at these phases of road work:

- Subgrade approval
- Drainage installation
- Subgrade compaction
- Rock application
- Rock compaction

SUBSECTION RESTRICTIONS

1-27 TIMING RESTRICTION FOR MARBLED MURRELET

On the following road(s), timber felling, road work or operation of heavy equipment performed during the marbled murrelet nesting season (April 1 through September 23), is restricted to, two hours after sunrise to two hours before sunset. This does not apply to hauling timber, rock or equipment.

<u>Road</u>	<u>Stations</u>
D-5000	430+00 (Mile 8.14) – 457+30 (Mile 8.66)
D-5040	55+00 – 75+70
D-5050	107+30 – 110+60

1-29 SEDIMENT RESTRICTION

Purchaser shall not allow silt-bearing runoff to enter any streams.

1-30 CLOSURE TO PREVENT DAMAGE

In accordance with Contract Clause G-220 State Suspends Operation, the Contract Administrator shall suspend road work or hauling of right-of-way timber, forest products, or rock under the following conditions:

- In the opinion of the Contract Administrator excessive road damage or rutting may occur.

Operations must stop unless authority to continue working or hauling is granted, in writing, by the Contract Administrator. In the event that surface or base stability problems persist, the Purchaser will be required to cease operations, or perform corrective maintenance or repairs, subject to specifications within this Road Plan. Before and during any suspension, the Purchaser shall protect the work from damage or deterioration.

1-32 BRIDGE AND ASPHALT SURFACE RESTRICTION

The use of metal tracked equipment is not allowed on bridge or asphalt surfaces at any time. If Purchaser must run equipment on bridge or asphalt surfaces, then rubber tired equipment or other methods, as approved in writing by Contract Administrator, shall be used.

If tracked equipment is used on bridge or asphalt surfaces, Purchaser shall immediately cease all road work and hauling operations. Any dirt, rock, or other material tracked or spilled on bridge or asphalt surface(s) shall be removed immediately. Any damage to the surface(s) shall be repaired at the Purchaser’s expense as directed by the Contract Administrator.

1-33 SNOW PLOWING RESTRICTION

On all roads, snow plowing shall be permitted only after the execution of a Snow Plowing Agreement, which is available from the Contact Administrator upon request. Purchaser shall request a Snow Plowing Agreement each time plowing occurs. If damage occurs while plowing, further permission to plow may be revoked by the Contract Administrator.

SUBSECTION OTHER INFRASTRUCTURE

1-40 ROAD APPROACHES TO COUNTY ROADS AND STATE HIGHWAYS

At existing road approaches to county roads and state highways, any mud, dirt, rock or other material tracked or spilled on the asphalt surface shall be removed immediately by the Purchaser.

If additional damage to the surface, signs, guardrails, etc. occurs then the damage shall be repaired, at the Purchaser’s expense, as directed by the Contract Administrator when authorized by the county or WSDOT.

The following county roads and state highways are affected by this sale:

<u>Road Name</u>
Mina Smith Road
Quillayute Road

1-41 REQUIREMENTS FOR PAVED ROAD APPROACHES

Requirements for the Quillayute Road approaches:

Purchaser shall build up approaches to allow a smooth grade transition between the D-3400 road and Quillayute Road. The top of the D-3400 road approach will be paved with 4” of asphalt as shown in Clallam County Road Approach Permit, No. RDP2019-00190, and as shown on Road Approach Detail Sheet 1 and 2. Surfacing must be kept level with the surface of the Quillayute Road at all times. See attached Clallam County Road Approach Permit.

1-43 ROAD WORK AROUND UTILITIES

Road work is in close proximity to a utility. Known utilities are listed, but it is the Purchaser’s responsibility to identify any utilities not listed. The Purchaser shall work in accordance with all applicable laws or rules concerning utilities. The Purchaser is responsible for all notification, including “call before you dig”, and liabilities associated with the utilities and their rights-of-way.

<u>Road</u>	<u>Stations</u>	<u>Utility</u>	<u>Utility Contact</u>
Quillayute Road	Mile 6.5 – Mile 6.6	PUD No. 1 of Clallam County	811 and 1-800-542-7859

SECTION 2 – MAINTENANCE

2-1 GENERAL ROAD MAINTENANCE

Purchaser shall maintain all roads used under this contract in accordance with the FOREST ACCESS ROAD MAINTENANCE SPECIFICATIONS for the entire term of this contract. Maintenance is required even during periods of inactivity.

2-2 ROAD MAINTENANCE – PURCHASER MAINTENANCE

Purchaser shall perform maintenance on roads listed in Contract Clause C-050 PURCHASER ROAD MAINTENANCE AND REPAIR in accordance with FOREST ACCESS ROAD MAINTENANCE SPECIFICATIONS.

2-3 ROAD MAINTENANCE – DESIGNATED MAINTAINER

Purchaser may be required to perform maintenance on roads listed in Contract Clause C-060 DESIGNATED ROAD MAINTAINER as directed by the Contract Administrator. Purchaser shall maintain roads in accordance with FOREST ACCESS ROAD MAINTENANCE SPECIFICATIONS.

2-4 PASSAGE OF LIGHT VEHICLES

Purchaser shall maintain roads in a condition that will allow the passage of light administrative vehicles.

2-5 MAINTENANCE GRADING – EXISTING ROAD

On the following road(s), a grader shall be used to shape the existing surface.

<u>Road</u>	<u>Stations</u>	<u>Requirements</u>
D-5040	0+00 – 75+70	Grade and shape existing road surface.
D-5050	107+30 – 114+25	Grade and shape existing road surface.
D-5055	0+00 – 55+75	Grade and shape existing road surface.
D-5055	55+75 – 90+30	Grade, shape, and compact existing road surface.
D-5055.3	0+00 – 27+80	Grade, shape, and compact existing road surface.
D-5055.31	0+00 – 11+30	Grade, shape, and compact existing road surface.
D-5055.5	0+00 – 58+00	Grade, shape, and compact existing road surface.
D-3400	0+00 – 0+50	Fine grade applied Crushed Surface Top Course (CSTC) for best possible drainage.

2-7 CLEANING DITCHES, HEADWALLS, AND CATCH BASINS

On the following road(s), Purchaser shall clean and/or construct the ditches, headwalls, and catch basins. Work shall be completed before the start of timber haul and shall be done in accordance with the Typical Section Sheet. Pulling ditch material across the road or mixing in with the road surface will not be allowed. Ditchlines, headwalls, and catch basins shall not encroach into the existing road.

<u>Road</u>	<u>Stations</u>	<u>Left or Right</u>	<u>Comments</u>
D-5055	0+10 – 2+45 2+90 – 8+15 55+75 – 58+25 64+80 – 67+10 67+80 – 73+60 74+20 – 87+80 88+40 – 90+30	Right	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055	57+65 – 64+80 84+50 – 87+10	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.3	0+10 – 1+75 16+00 – 22+30 22+80 – 27+80	Right	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.3	0+10 – 15+25	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.31	0+40 – 11+30	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.32	0+15 – 1+65	Right	Scatter waste in accordance with Clause 3-23 and Clause 4-38.

D-5055.32	0+15 – 0+95	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.5	0+25 – 2+45	Right	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.5	0+25 – 2+45 13+70 – 15+55 16+15 – 18+05 18+70 – 22+10 22+60 – 53+45 54+05 – 57+05	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.53	0+18 – 9+15	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.54	0+12 – 1+85	Left	Scatter waste in accordance with Clause 3-23 and Clause 4-38.
D-5055.6	0+10 – 8+20	Right	Scatter waste in accordance with Clause 3-23 and Clause 4-38.

2-8 MAINTAINING EROSION CONTROL STRUCTURES

On the following road(s), Purchaser shall clean and maintain all erosion control devices. Work shall be completed before the start of timber haul and shall be done in accordance with all pertaining clauses contained in this Road Plan. Excavated material shall be disposed of in accordance with Clause 4-35 through Clause 4-38.

<u>Road</u>	<u>Stations</u>	<u>Work Needed</u>
D-5040	33+50	Maintain silt fence in ditch on left.
D-5040	33+63	Maintain silt fence in ditch on right.
D-5040	34+40	Maintain silt fence in ditch on left and right.
D-5040	38+60	Maintain silt fence in ditch on left.
D-5040	38+70	Maintain silt fence in ditch on right.
D-5040	39+45	Maintain silt fence in ditch on left and right.
D-5040	69+40	Maintain silt fence in ditch on right.
D-5040	70+00	Maintain silt fence in ditch on left and right.
D-5055	0+75	Maintain silt fence in ditch on right.
D-5055	1+50	Maintain silt fence in ditch on right.
D-5055	47+75	Maintain silt fence in ditch on right.
D-5055	48+45	Maintain silt fence in ditch on right.
D-5055	71+60	Maintain silt fence in ditch on right.
D-5055	72+20	Maintain silt fence in ditch on right.
D-5055	79+10	Maintain silt fence in ditch on right.
D-5055	80+20	Maintain silt fence in ditch on right.
D-5055	87+10	Maintain silt fence in ditch on left and right.
D-5055.3	10+50	Maintain silt fence in ditch on left.
D-5055.3	13+50	Maintain silt fence in ditch on left.
D-5055.31	6+95	Maintain silt fence in ditch on left.
D-5055.31	7+60	Maintain silt fence in ditch on left.
D-5055.5	45+70	Maintain silt fence in ditch on left.
D-5055.5	46+00	Maintain silt fence in ditch on left.

2-9 REMOVING VEGETATIVE MATERIAL

On the following road(s), Purchaser shall remove all vegetative material, dirt, mud, and other debris on the existing road surface with a minimum loss of rock. Material removed shall be disposed of in accordance with Clause 3-21 through Clause 3-25 and Clause 4-36 through Clause 4-38.

<u>Road</u>	<u>Stations</u>
D-5055	0+00 – 90+30
D-5055.3	0+00 – 27+80
D-5055.31	0+00 – 11+30
D-5055.311	0+00 – 1+40
D-5055.32	0+00 – 1+40
D-5055.5	0+00 – 58+00
D-5055.51	0+00 – 1+10
D-5055.53	0+00 – 9+50
D-5055.54	0+00 – 1+85
D-5055.6	0+00 – 9+30

SECTION 3 – CLEARING, GRUBBING, AND DISPOSAL

SUBSECTION CLEARING

3-5 CLEARING

Purchaser shall fall all vegetative material larger than 5 inches DBH or over 15 feet high between the marked right-of-way boundaries or if not marked in the field, between the clearing limits specified on the TYPICAL SECTION SHEET. Clearing must be completed before starting excavation and embankment.

3-7 RIGHT-OF-WAY DECKING

Deck all merchantable right-of-way timber. Decks shall be parallel to the road centerline and placed within the cleared right-of-way. Decks shall be free of dirt, limbs and other right-of-way debris, and removable by standard log loading equipment.

3-8 PROHIBITED DECKING AREAS

Right-of-way timber shall not be decked in the following areas:

- Within the grubbing limits.
- Within 50 feet of any stream.
- In locations that interfere with the construction of the road prism.
- In locations that impede drainage.
- On slopes greater than 40%.
- Against standing trees unless approved by the Contract Administrator.

SUBSECTION GRUBBING

3-10 GRUBBING

Remove all stumps between the grubbing limits specified on the Typical Section Sheet. Those stumps outside the grubbing limits but with undercut roots shall also be removed. Stump removal shall be accomplished using a hydraulic mounted excavator unless authorized, in writing, by the Contract Administrator. Grubbing shall be completed before starting excavation and embankment.

3-12 STUMP PLACEMENT

Grubbed stumps shall be placed outside of the clearing limits, as directed by the Contract Administrator and in compliance with all other clauses in this road plan. Stumps shall be positioned upright with root wads in contact with the forest floor and on stable locations.

SUBSECTION ORGANIC DEBRIS

3-20 ORGANIC DEBRIS DEFINITION

Organic debris is defined as all vegetative material not eligible for removal by Contract Clauses G-010 Products Sold And Sale Area or G-011 Right To Remove Forest Products And Contract Area, that is larger than one cubic foot in volume within the grubbing Typical Section Sheet.

3-21 DISPOSAL COMPLETION

All disposal of organic debris, shall be completed before the application of rock.

3-23 PROHIBITED DISPOSAL AREAS

Organic debris shall not be deposited in the following areas:

- Within 5 feet of a cross drain culvert.
- Within 50 feet of a live stream, or wetland.
- On road subgrades road prism excavation and embankment slopes.
- On slopes greater than 45%.
- Within the operational area for cable landings where debris may shift or roll.
- On locations where brush will fall into the ditch or onto the road surface.
- Against standing timber.

3-24 BURYING ORGANIC DEBRIS RESTRICTED

Organic debris shall not be buried unless otherwise stated in this Road Plan.

3-25 SCATTERING ORGANIC DEBRIS

Organic debris shall be scattered outside of the grubbing limits in accordance with Clause 3-23 unless otherwise detailed in this Road Plan and as directed by the Contract Administrator.

SUBSECTION PILE

3-31 PILING

Organic debris shall be piled no closer than 20 feet from standing timber and no higher than 20 feet in areas specified in Clause 3-22 Designated Waste Area For Organic Debris. Piles shall be free of rock and soil.

SECTION 4 – EXCAVATION

4-1 EXCAVATOR CONSTRUCTION

All roads shall be constructed, reconstructed, and maintained using a track mounted hydraulic excavator unless stated otherwise within this Road Plan, or permission to do otherwise is granted in writing by the Contract Administrator.

4-2 PIONEERING

Pioneering shall not extend past construction that will be completed during the current construction season. Pioneering shall not extend more than 1000 feet beyond completed construction unless approved in writing by the Contract Administrator. In addition, the following actions shall be taken as pioneering progresses:

- Drainage shall be provided on all uncompleted construction.
- Road pioneering operations shall not undercut the final cut slope or restrict drainage.
- Culverts at live stream crossings shall be installed during pioneering operations prior to embankment.

4-3 ROAD GRADE AND ALIGNMENT STANDARDS

The following road grade and alignment standards shall be followed:

- Grade and alignment shall have smooth continuity, without abrupt changes in direction.
- Maximum grade shall not exceed 18 percent favorable and 16 percent adverse.
- Minimum curve radius is 60 feet at centerline.
- Sag vertical curves shall not have a grade change greater than 5% in 100 feet.
- Crest vertical curves shall not have a grade change greater than 4% in 100 feet.

4-4 SWITCHBACK STANDARDS

A switchback is defined as a curved segment of road between a beginning and end of the same curve, where the change of traffic travel direction is greater than 90 degrees. The following standards for switchbacks shall be followed:

- Adverse grades on switchbacks shall not exceed 10%.
- Favorable grades through switchbacks shall not exceed 12%.
- Transition grades entering and leaving switchbacks shall not exceed a 5% grade change.
- Transition grades required to meet switchback grade limitations shall be constructed on the tangents preceding and departing from the switchbacks.

4-5 CUT SLOPE RATIO

Unless construction staked or designed excavation slopes shall be constructed no steeper than shown on the following table:

<u>Material Type</u>	<u>Excavation Slope Ratio</u>	<u>Excavation Slope Percent</u>
Common Earth (on side slopes up to 55%)	1:1	100
Common Earth (56% to 70% side slopes)	¾:1	133
Common Earth (on slopes over 70%)	½:1	200
Fractured or loose rock	½:1	200
Hardpan or solid rock	¼:1	400

4-6 EMBANKMENT SLOPE RATIO

Unless construction staked or designed embankment slopes shall be constructed no steeper than shown on the following table:

<u>Material Type</u>	<u>Embankment Slope Ratio</u>	<u>Embankment Slope Percent</u>
Sandy Soils	2:1	50
Common Earth and Rounded Gravel	1½:1	67
Angular Rock	1¼:1	80

4-7 SHAPING CUT AND FILL SLOPE

Excavation and embankment slopes shall be constructed to a uniform line and left rough for easier revegetation.

4-8 CURVE WIDENING

The minimum widening placed on the inside of curves is:

- 6 feet for curves of 50 to 79 feet radius.
- 4 feet for curves of 80 to 100 feet radius.

4-9 EMBANKMENT WIDENING

The minimum embankment widening is:

- 2 feet for embankment heights at centerline of 2 to 6 feet.
- 4 feet for embankment heights at centerline of greater than 6 feet.

Embankment widening shall be applied equally to both sides of the road to achieve the required width.

4-12 FULL BENCH CONSTRUCTION

On any road(s), where side slopes exceed 45%, Purchaser shall use full bench construction for the entire subgrade width, except as construction staked or designed.

SUBSECTION INTERSECTIONS, TURNOUTS AND TURNAROUNDS

4-21 TURNOUTS

Turnouts shall be intervisible with maximum of 1,000 feet between turnouts unless shown otherwise on drawings. Locations shall be adjusted to fit the final subgrade alignment and sight distances. Turnout locations shall be subject to written approval by the Contract Administrator.

4-22 TURNAROUNDS

Turnarounds shall be no larger than 50 feet long and 30 feet wide. Locations shall be subject to written approval by the Contract Administrator.

SUBSECTION DITCH CONSTRUCTION

4-25 DITCH CONSTRUCTION AND RECONSTRUCTION

The Purchaser shall construct ditches into the subgrade as specified on the Typical Section Sheet. Excavated slopes shall be consistent with Clause 4-5 Cut Slope Ratio. Ditches shall be constructed concurrently with construction of the subgrade.

4-27 DITCH WORK – MATERIAL USE PROHIBITED

On all roads, pulling ditch material across the road or mixing in with the road surface will not be allowed. Excavated material shall be disposed of as specified in Clause 4-36 through Clause 4-38.

4-28 DITCH DRAINAGE

Ditches must drain to cross-drain culverts or ditchouts.

4-29 DITCHOUTS

Ditchouts shall be constructed at locations shown on the list below, and as needed to fit as built conditions. Ditchouts shall be constructed in a manner that diverts ditch water onto the forest floor and shall have excavation backslopes no steeper than a 1:1 ratio. L or R denotes ditchout left or ditchout right heading in.

<u>Road</u>	<u>Stations</u>	<u>L or R</u>
D-5055.5	4+85	L (approx. 40')
D-5055.5	7+30	L (approx. 30')
D-5055.5	29+65	R (approx. 30')
D-5055.5	32+52	R (approx. 30')
D-5055.5	57+05	L (approx. 30')
D-5055.53	9+15	L (approx. 30')
D-5055.6	5+20	L (approx. 20')

SUBSECTION WASTE MATERIAL (DIRT)

4-35 WASTE MATERIAL DEFINITION

Waste material is defined as all dirt, rock, mud, or related material that is extraneous or unsuitable for construction material. Waste material, as used in Section 4 EXCAVATION, is not organic debris.

4-36 DISPOSAL OF WASTE MATERIAL

Purchaser may sidecast waste material on side slopes up to 45% if the waste material is compacted and free of organic debris. On side slopes greater than 45%, all waste material must be end hauled or pushed to the designated embankment sites and waste areas identified in Clause 4-37 WASTE AREA LOCATION.

4-38 PROHIBITED WASTE DISPOSAL AREAS

Waste material shall not be deposited in the following areas:

- Within 5 feet of a cross drain culvert.
- Within 50 feet of a live stream or wetland.
- Within a riparian management zone.
- On side slopes steeper than 45%.
- In locations that interfere with the construction of the road prism.
- In locations that impede drainage.
- Within the operational area for cable landings.
- Against standing timber.

4-39 WASTE AREA COMPACTION

Excavated material may be deposited adjacent to the road prism on side slopes up to 45% if the waste material is compacted and free of debris. On side slopes of 45% or more, all excavation shall be end hauled or pushed to designated waste areas. All waste material shall be compacted. The minimum acceptable compaction is achieved by placing embankments in 2 foot or shallower lifts and routing excavation equipment over the entire width of the lifts, with the exception of side hill embankments too narrow to accommodate excavation equipment which may be placed by end-dumping or sidecasting until sufficiently wide to support the equipment.

SUBSECTION BORROW

4-47 NATIVE MATERIAL

Native material shall be excavated material free of organic debris, trash, and rocks greater than 12" in any dimension.

4-48 BORROW MATERIAL

Borrow material shall contain no more than 5% clay, organic debris, or trash by volume.

SUBSECTION SHAPING

4-55 ROAD SHAPING

The road subgrade and surface shall be shaped as shown on the Typical Section Sheet. The subgrade and surface shape shall ensure runoff in an even, un-concentrated manner, and shall be uniform, firm, and rut-free.

4-56 DRY WEATHER SHAPING

At any time of year, the Contract Administrator may require the application of water to facilitate shaping activities. The method of water application is subject to written approval by the Contract Administrator.

4-60 FILL COMPACTION

Purchaser shall compact all embankment and waste material in accordance with the Compaction List by routing equipment over the entire width of each lift. A plate compactor must be used for areas specifically requiring keyed embankment construction, and embankment segments too narrow to accommodate equipment.

4-61 SUBGRADE COMPACTION

Purchaser shall compact constructed and reconstructed subgrades in accordance with the Compaction List by routing equipment over the entire width, except ditch. Purchaser shall obtain written approval from the Contract Administrator for subgrade compaction before placement of rock.

4-62 DRY WEATHER COMPACTION

At any time of the year, the Contract Administrator may require the application of water to facilitate compaction activities. The method of water application is subject to written approval by the Contract Administrator.

4-63 EXISTING SURFACE COMPACTION

Purchaser shall compact maintained road surfaces in accordance with the Compaction List by routing equipment over the entire width.

4-64 WASTE MATERIAL COMPACTION

All waste material shall be compacted by running equipment over it or bucket tamping.

4-65 CULVERT BACKFILL COMPACTION

Culvert backfills shall be accomplished by using a jumping jack compactor, performing at least 2 passes per lift, in lifts not to exceed 6 inches.

4-66 COMPACTION BY METHOD

Compaction shall consist of three complete passes over the entire width of each lift with a vibratory drum roller weighing a minimum of 6,000 pounds at a maximum operating speed of 3 mph. For embankment segments too narrow to accommodate a drum roller, a plate compactor shall be used.

SUBSECTION SUBGRADE REINFORCEMENT

SECTION 5 – DRAINAGE

5-4 PUNCHEON RESTRICTED

At no time shall puncheon be used in the subgrade, unless approved by the Contract Administrator.

SUBSECTION CULVERTS

5-5 CULVERTS

Culverts shall be installed as part of this contract. Culverts shall be installed concurrently with subgrade work and shall be installed before subgrade compaction and rock application. Culvert locations and the minimum requirements for culvert length and diameter are designated on the Culvert List. Culvert, downspout, and flume lengths shall be adjusted to fit as-built conditions and shall not terminate directly on unprotected soil. Culverts shall be new and meet the material specifications in Clauses 10-15 through 10-23.

5-11 UNUSED MATERIALS STATE PROPERTY

On required roads, any materials listed on the Culvert List and Rock List that are not installed shall become the property of the State. Purchaser shall stockpile materials as directed by the Contract Administrator.

5-12 CONTINGENCY CULVERTS

The following culverts will be supplied by the Purchaser and will be available for installation on any road listed in the TYPICAL SECTION SHEET as directed by the Contract Administrator. Contingency culverts that are not installed shall be delivered to the culvert storage area at the Olympic Region Office, or as directed by the Contract Administrator.

<u>Road</u>	<u>Quantity</u>	<u>Size</u>
As Directed by Contract Administrator	2	18" X 30'

SUBSECTION CULVERT INSTALLATION

5-15 CULVERT INSTALLATION

Installation shall be in accordance with the Typical Cross Drain Culvert Installation Detail, Typical Type Ns Np Culvert Installation Detail, the National Corrugated Metal Pipe Association's "Installation Manual for Corrugated Steel Drainage Structures", and the Corrugated Polyethylene Pipe Association's "Recommended Installation Practices for Corrugated Polyethylene Pipe and Fittings". Corrugated Polyethylene pipe shall be installed in a manner consistent with the manufacturer's recommendations.

5-16 APPROVAL FOR LARGER CULVERT INSTALLATION

Installation of culverts 30 inches in diameter and over shall be subject to written approval by the District Engineer or their designee before backfilling.

5-17 CROSS DRAIN SKEW AND SLOPE

Cross drains on road grades in excess of 3% shall be skewed at least 30 degrees from perpendicular to the road centerline, except where the cross drain is at the low point in the road. Where the cross drain is at the low point in the road, culverts shall not be skewed. Cross drain culverts shall be installed at a slope steeper than the incoming ditch grade, but not less than 3% or more than 10%.

5-18 CULVERT DEPTH OF COVER

Cross drain culverts shall be installed with a depth of cover of not less than 18 inches of compacted depth over the top of the culvert at the shallowest point. Stream crossing culverts shall be installed with a depth of cover specified in the Engineer's design, Type Ns Np Typical Detail Sheet, or to the minimum depth recommended by the culvert manufacturer for the type of cover material over the pipe, whichever is greater.

SUBSECTION ENERGY DISSIPATERS

5-20 ENERGY DISSIPATERS

Energy dissipaters shall be installed to prevent erosion and are subject to approval by the Contract Administrator. Rock shall weigh at least 10 pounds and be placed by zero-drop-height method. Energy dissipater shall extend a minimum of ¾ foot to each side of the culvert at the outlet and a minimum of 2 feet beyond the outlet.

5-21 DOWNSPOUTS AND FLUMES

Downspouts and flumes longer than 10 feet shall be staked on both sides at maximum intervals of 10 feet with 6-foot heavy-duty steel posts or 1 ½" X 3/16" angle iron, and fastened securely to the posts with No. 10 galvanized smooth wire, or bolted using minimum 5/16" bolts and 2 washers per bolt, in accordance with the Culvert Installation Typical Details Page.

SUBSECTION CATCH BASINS, HEADWALLS, AND ARMORING

5-25 CATCH BASINS

Catch basins shall be constructed to resist erosion. Approximate dimensions are 1-2 feet deep, 1-2 feet wide, and 2-4 feet long.

5-26 HEADWALLS FOR CROSS DRAIN CULVERTS

Headwalls shall be constructed in accordance with the Typical Cross Drain Culvert Installation Detail at all cross drain culverts that specify the placement of rock. Rock used for headwalls shall consist of oversize or quarry spall material. Rock shall be placed on shoulders, slopes, and around culvert inlets and outlets. Rock shall not restrict the flow of water into culvert inlets or catch basins. No end dumping of rock is allowed.

5-27 ARMORING FOR STREAM CROSSING CULVERTS

At the following culvert(s), rip rap shall be set in place immediately following construction of the embankment. Rock shall be placed on shoulders, slopes, and around culvert inlets and outlets as designated on the Typical Type Ns Np Culvert Installation Detail as directed by the Contract Administrator. Rock shall not restrict the flow of water into culvert inlets or catch basins. Rock shall be set in place by machine. Placement shall be by zero-drop-height method only. No placement by end dumping or dropping of rock shall be allowed.

<u>Road</u>	<u>Stations</u>	<u>Rock Type</u>
D-5055	70+30	Oversize
D-5055.5	17+72	Oversize
D-5055.5	52+82	Oversize

SECTION 6 – ROCK AND SURFACING

SUBSECTION ROCK SOURCE

6-2 ROCK SOURCE ON STATE LAND

Rock used in accordance with the quantities on the Rock List may be obtained from the following source(s) on state land at no charge to the Purchaser. Use of material from any other source must have prior written approval from the Contract Administrator. If other operators are using, or desire to use, the rock source(s), a joint operating plan shall be developed. All parties shall follow this plan. The Purchaser shall notify the Contract Administrator a minimum of 5 calendar days before starting any operations in the listed locations.

<u>Source</u>	<u>Location</u>	<u>Rock Type</u>
Mora Pit	Sec. 23-24, T28N, R15W	Pitrun, Oversize

6-5 ROCK FROM COMMERCIAL SOURCE

Rock used in accordance with the quantities on the Rock List may be obtained from any commercial source at the Purchaser's expense. Rock sources will be subject to written approval by the Contract Administrator before their use.

SUBSECTION ROCK SOURCE DEVELOPMENT

6-10 ROCK SOURCE DEVELOPMENT PLAN BY STATE

All rock source development and use shall be in accordance with a written Rock Source Development and Reclamation Plan prepared by the State and included in this Road Plan. Rock source operations shall be conducted as directed by the Contract Administrator and in accordance with the plan. Upon completion of operations, the rock source shall be left in the condition specified in the Rock Source Development and Reclamation Plan, and approved in writing by the Contract Administrator. The Purchaser shall notify the Contract Administrator a minimum of 5 calendar days before starting any operations in the rock source.

6-12 ROCK SOURCE SPECIFICATIONS

Rock sources shall be in accordance with the following unless otherwise specified in Rock Source Development and reclamation plan:

- Pit walls shall not be undermined or over-steepened. The maximum slope of the walls shall be consistent with recognized engineering standards for the type of material being excavated in accordance with the following table:

Material	Maximum Slope Ratio (Horiz.:Vert.)	Maximum Slope Percent
Sand	2:1	50
Gravel	1.5:1	67
Common Earth	1:1	100
Fractured Rock	0.5:1	200
Solid Rock	0:1	vertical

- Pit walls shall be maintained in a condition to minimize the possibility of the walls sliding or failing.
- The width of pit benches shall be a minimum of 1.5 times the maximum length of the largest machine used.
- The surface of pit floors and benches shall be uniform and free-draining at a minimum 2% outslope gradient.
- All operations shall be carried out in compliance with all regulations of the Regulations and Standards Applicable to Metal and Nonmetal Mining and Milling Operations (30 CFR) U.S. Department of Labor, Mine Safety and Health Administration and Safety Standards for Construction Work (296-155 WAC), Washington Department of Labor and Industries.
- Block all vehicle access to the top of the pit faces.

SUBSECTION ROCK GRADATIONS

6-26 CRUSHED SURFACE TOP COURSE (CSTC)

% Passing 3/4"	99 - 100%
% Passing 1/2" square sieve	80 - 100%
% Passing U.S. #4 sieve	46 - 66%
% Passing U.S. #40 sieve	8 - 24%
% Passing U.S. #200 sieve	10.0% max.
% Fracture	75% min.
Sand Equivalent	40% min.

6-28 1 1/4-INCH MINUS CRUSHED ROCK

% Passing 1 1/4" square sieve	100%
% Passing 5/8" square sieve	50 - 80%
% Passing U.S. #4 sieve	30 - 50%
% Passing U.S. #40 sieve	3 - 18%
% Passing U.S. #200 sieve	5%

The portion of aggregate retained on the No. 4 sieve shall not contain more than 0.2% organic debris and trash. All percentages are by weight.

6-43 QUARRY SPALLS

% Passing 12" square sieve 100%
% Passing 8" square sieve 10% maximum

Rock shall not contain more than 5% vegetative debris or trash. All percentages are by weight.

6-52 OVERSIZE

% Passing 8" square sieve 100%
% Passing 4" square sieve 0%

Rock shall not contain more than 5 percent vegetative debris or trash. All percentages are by weight.

SUBSECTION ROCK MEASUREMENT

6-55 ROCK APPLICATION MEASURED BY COMPACTED DEPTH

Measurement of specified rock depths are defined as the compacted depth(s) using the compaction methods required in this Road Plan. Estimated quantities specified in the Rock List are estimated truck yards. Purchaser shall apply adequate amounts of rock to meet the specified rock depths. Specified rock depths are minimum requirements and are not subject to reduction.

SUBSECTION ROCK APPLICATION

6-70 APPROVAL BEFORE ROCK APPLICATION

Subgrade drainage installation including grading and compaction, shall be completed and approved in writing by the Contract Administrator, before rock application.

6-71 ROCK APPLICATION

Rock shall be applied in accordance with the specifications and quantities shown on the Rock List. Rock shall be spread, shaped, and compacted full-width concurrent with rock hauling operations. Rock shall be compacted in accordance with Compaction List, in lifts not to exceed 6 inches.

6-72 ROCK APPLICATION AFTER HAULING

On the following road(s), upon completion of all hauling operations, Purchaser shall apply pitrun rock in accordance with the quantities shown on the Rock List.

<u>Road</u>	<u>Stations</u>	<u>Amount</u>
D-5040	0+00 – 75+70	50 yd ³
D-5055	0+00 – 90+30	100 yd ³

6-73 ROCK FOR WIDENED PORTIONS

Turnarounds, turnouts, and areas with curve widening shall have rock applied to the same depth and specifications as the traveled way.

6-78 ROCK FOR SPOT PATCHING

Rock for spot patching shall be applied before any grading is done and before any rock lifts are applied. Once applied, spot patches shall be graded into the existing running surface.

SUBSECTION ASPHALT

6-91 ASPHALT AT ROAD APPROACHES

At the following road approach location(s), the road approaches shall be leveled with Hot Mix Asphalt (HMA) to allow a smooth transition onto the existing County road. HMA shall be applied as directed by the District Engineer, or their designee. HMA shall follow the specifications outlined in Clause 10-35 Hot Mix Asphalt (HMA).

A light tack coat shall be applied to all leveling areas in conformance with Section 5-04.3(5)A of the WSDOT Standard Specifications. A slightly heavier tack coat shall be applied at the end of each leveling area or where the asphalt will be feathered out or adjacent to existing County road.

Areas that are to be leveled shall have HMA applied at a depth determined by the District Engineer, or their designee. HMA shall be graded to provide an even grade and contour. At the ends of leveling areas, the HMA shall be feathered so that a smooth tapered edge or joint will result. HMA shall be compacted in accordance to the COMPACTION LIST and conforming with Section 5-04.3(10)A of the WSDOT Standard Specifications.

<u>Road</u>	<u>Stations</u>
D- 3400	0+00 - 0+50

6-94 HMA WEATHER LIMITATIONS (*WSDOT 5-04.3(16)*)

HMA shall not be placed on any wet surface, or when the average surface temperatures are less than 45°F or when weather conditions otherwise prevent the proper handling or finishing of the HMA.

When, in the opinion of the District Engineer or their designee, the weather is such that satisfactory results cannot be obtained in any phase of operations, the Purchaser shall suspend operations until weather is favorable.

SECTION 7 – STRUCTURES

SUBSECTION STREAM CROSSING STRUCTURES GENERAL

7-5 STRUCTURE DEBRIS

The Purchaser shall ensure that debris from the installation or removal of structures does not enter any stream. Components removed from the existing structures(s) shall be placed at designated site(s), as directed in writing by the Contract Administrator. The Purchaser is responsible for maintaining a clean jobsite, with all materials stored away from any high water mark or other area presenting a risk of the materials entering a stream. Debris entering any stream shall be removed immediately and placed in the site(s) designated for stockpiling or disposal. The Purchaser is responsible for retrieving all material carried downstream from the jobsite by the stream current.

7-6 STREAM CROSSING INSTALLATION

Installation of stream crossing structures shall be in accordance with the manufacturer's requirements, and as directed by the District Engineer or their designee.

7-7 BANK PROTECTION FOR STREAM CROSSING STRUCTURES

Bank protection shall be designed and constructed to prevent the undermining of the structure.

SUBSECTION GATE CLOSURE

7-70 GATE CLOSURE

On the following road(s), Purchaser shall keep gates closed and locked except during periods of haul. All gates that remain open during haul shall be locked or securely fastened in the open position. All gates shall be closed at termination of use.

<u>Road</u>	<u>Station</u>	<u>Gate No.</u>	<u>Comment</u>
D-3400	0+45	T28R15W-2	Check out AA-1 key from DNR

SECTION 8 – EROSION CONTROL

8-1 SEDIMENT CONTROL STRUCTURES

On the following road(s), Purchaser shall install sediment control structures as listed below.

<u>Road</u>	<u>Stations</u>	<u>Comments</u>
D-5040	33+50	Install silt fence in ditch on left.
D-5040	33+63	Install silt fence in ditch on right.
D-5040	34+40	Install silt fence in ditch on left and right.
D-5040	38+60	Install silt fence in ditch on left.
D-5040	38+70	Install silt fence in ditch on right.
D-5040	39+45	Install silt fence in ditch on left and right.
D-5040	69+40	Install silt fence in ditch on right.
D-5040	70+00	Install silt fence in ditch on left and right.
D-5055	0+75	Install silt fence in ditch on right.
D-5055	1+50	Install silt fence in ditch on right.
D-5055	47+75	Install silt fence in ditch on right.
D-5055	48+45	Install silt fence in ditch on right.
D-5055	71+60	Install silt fence in ditch on right.
D-5055	72+20	Install silt fence in ditch on right.
D-5055	79+10	Install silt fence in ditch on right.
D-5055	80+20	Install silt fence in ditch on right.
D-5055	87+10	Install silt fence in ditch on left and right.
D-5055.3	10+50	Install silt fence in ditch on left.
D-5055.3	13+50	Install silt fence in ditch on left.
D-5055.31	6+95	Install silt fence in ditch on left.
D-5055.31	7+60	Install silt fence in ditch on left.
D-5055.5	45+70	Install silt fence in ditch on left.
D-5055.5	46+00	Install silt fence in ditch on left.

8-2 PROTECTION FOR EXPOSED SOIL

Purchaser shall furnish and evenly spread a 3-inch layer of straw to all exposed soils at stream culvert installations. Soils shall not be allowed to sit exposed during any rain event.

SUBSECTION REVEGETATION

8-15 REVEGETATION

Purchaser shall grass seed and hay mulch all exposed soils including, but not limited to, stream culverts, waste areas, sidecast pull back areas, stream crossing removals, bridge installations, and other areas directed by the Contract Administrator. Revegetation of exposed soils shall be accomplished by manual dispersal of grass seed unless otherwise detailed in this Road Plan. Other methods of revegetation must be approved in writing by the Contract Administrator.

8-16 REVEGETATION SUPPLY

All seed, mulch, hay, matting, etc. will be provided by the Purchaser.

8-17 REVEGETATION TIMING

Purchaser shall perform revegetation during the first available opportunity. Soils shall not be allowed to sit exposed for longer than one month without receiving revegetation treatment unless otherwise approved in writing by the Contract Administrator. Soils shall not be allowed to sit exposed during any rain event.

8-18 PROTECTION FOR SEED

Purchaser shall provide a protective cover over the revegetated area. The protective cover may consist of, but not be limited to, such items as dispersed hay mulch 3" thick or jute matting.

8-19 ASSURANCE FOR SEEDED AREA

The Purchaser shall be responsible to ensure a uniform and dense crop of grass. The Purchaser shall reapply the seed and/or mulch in areas that have been damaged through any cause, before approval from the Contract Administrator. The Purchaser shall restore eroded or disturbed areas, clean up and properly dispose of eroded materials, and reapply the seed and/or mulch at no additional cost to the state.

SUBSECTION SEED, FERTILIZER, AND MULCH

8-25 GRASS SEED

Purchaser shall evenly spread the seed mixture listed below on all exposed soils at a rate of 60 pounds per acre of exposed soil.

<u>Seed Species</u>	<u>% by Weight</u>
• Perennial Ryegrass	40.00
• Creeping Red Fescue	40.00
• White Dutch Clover	10.00
• Colonial Bentgrass	10.00

Grass seed shall meet the following specifications:

1. Weed seed may not exceed 0.5% by weight.
2. All seed species must have a minimum 90% germination rate, unless otherwise specified.
3. Seed must be certified.
4. Seed must be furnished in standard containers showing the following information:
 - a. Common name of seed
 - b. Net weight
 - c. Percent of purity
 - d. Percentage of germination
 - e. Percentage of weed seed and inert material

SECTION 9 – POST-HAUL ROAD WORK

SUBSECTION STRUCTURES

9-3 REMOVAL OF CULVERT MATERIAL FROM STATE LAND

Culvert material removed from roads becomes the property of the Purchaser and must be removed from state land.

SUBSECTION POST-HAUL MAINTENANCE

9-5 POST-HAUL MAINTENANCE

Post-haul maintenance shall be performed in accordance with the Forest Access Road Maintenance Specifications and as specified below.

<u>Road</u>	<u>Stations</u>	<u>Additional Requirements</u>
All	All	Clean culverts, clean ditches, grade road shape and compact as directed by the Contract Administrator
D-5040	0+00 – 75+70	Apply post haul rock as per Clause 6-72.
D-5055	0+00 – 90+30	Apply post haul rock as per Clause 6-72.

SUBSECTION POST-HAUL LANDING MAINTENANCE

9-10 LANDING DRAINAGE

On all roads, Purchaser shall provide for drainage of the landing surface as approved in writing by the Contract Administrator.

9-11 LANDING EMBANKMENT

On all roads, landing embankments shall be sloped to original construction specifications.

SECTION 10 MATERIALS

SUBSECTION GEOTEXTILES

10-6 GEOTEXTILE FOR TEMPORARY SILT FENCE

Geotextiles shall meet the following minimum requirements for strength and property qualities, and shall be designed by the manufacturer to be used for filtration. Woven slit-film geotextiles will not be allowed. Material shall be free of defects, cuts, and tears.

	<u>ASTM Test</u>	<u>Requirements</u>
Type	--	Unsupported between posts
Apparent opening size	D 4751	No. 30 max., No. 100 min.
Water permittivity	D 4491	0.02 sec ⁻¹
Grab tensile strength	D 4632	180 lb in machine direction, 100lb in cross-machine direction
Grab tensile elongation	D 4632	30% max. at 180 lb or more
Ultraviolet stability	D 4355	70% retained after 500 hours of exposure

SUBSECTION EROSION CONTROL AND REVEGETATION

10-10 JUTE EROSION CONTROL MATTING

Jute mesh shall have a uniform open plain weave made from jute yarn that does not vary by more than half its nominal diameter. Erosion control matting shall conform to the specifications listed below, and shall be recommended by the manufacturer for use on embankments with a slope of 1½:1 (H:V) or steeper.

- Mesh size: 1 inch max.
- Mesh mass: 0.9 lb/yd² ±5%

10-11 COCONUT EROSION CONTROL MATTING

Coconut mat shall have a uniform open plain weave made from jute, coconut coir, synthetic polypropylene fibers, or other approved yarn. Erosion control matting shall conform to the specifications listed below, and shall be recommended by the manufacturer for use on embankments with a slope of 1½:1 (H:V) or steeper.

- Mesh size: 0.5 to 1 inch.
- Mesh mass: 0.4 lb/yd² min.
- Netting shall be photodegradable on one side.
- Moisture content shall not exceed 20%.

10-12 WOOD EXCELSIOR EROSION CONTROL MATTING

Excelsior blanket shall have a uniform thickness made of curled wood excelsior secured on the top side to a biodegradable, photodegradable extruded plastic mesh. Matting shall be smolder resistant without the use of additional chemical additives. Erosion control matting shall conform to the specifications listed below, and shall be recommended by the manufacturer for use on embankments with a slope of 1½:1 (H:V) or steeper.

- Mesh size: 1 to 2 inch.
- Blanket mass: 1 lb/yd² ±10%
- Excelsior fibers: 7.8 inch (200-mm) length 80% min.

SUBSECTION CULVERTS

10-15 CORRUGATED STEEL CULVERT

Metallic coated steel culverts shall meet AASHTO M-36 (ASTM A-760) specifications. Culverts shall be aluminized (aluminum type 2 coated meeting AASHTO M-274).

10-16 CORRUGATED ALUMINUM CULVERT

Aluminum culverts shall meet AASHTO M-196 (ASTM A-745) specifications.

10-17 CORRUGATED PLASTIC CULVERT

Polyethylene culverts shall meet AASHTO M-294 specifications. Culverts shall be Type S – double walled with a corrugated exterior and smooth interior.

10-20 FLUME AND DOWNSPOUT

Downspouts and flumes shall meet the AASHTO specification designated for the culvert. Plastic downspouts and flumes shall be Type S – double walled with a corrugated exterior and smooth interior.

10-21 METAL BAND

Metal coupling and end bands shall meet the AASHTO specification designated for the culvert and shall have matching corrugations. On culverts 24 inches and smaller, bands shall have a minimum width of 12 inches. On culverts over 24 inches, bands shall have a minimum width of 24 inches.

10-22 PLASTIC BAND

Plastic coupling and end bands shall meet the AASHTO specification designated for the culvert. Only fittings supplied or recommended by the culvert manufacturer shall be used. Couplings shall be split coupling band. Split coupling bands shall have a minimum of four corrugations, two on each side of the pipe joint.

10-23 RUBBER CULVERT GASKETS

Rubber gaskets must be continuous closed cell, synthetic expanded rubber gaskets conforming to the requirements of ASTM D 1056. Rubber gaskets must be used with all corrugated metal pipe coupling bands.

10-24 GAGE AND CORRUGATION

Metal culverts shall conform to the following specifications for gage and corrugation as a function of diameter.

<u>Diameter</u>	<u>Gage</u>	<u>Corrugation</u>
18"	16 (0.064")	2 2/3" X 1/2"
24" to 42"	14 (0.079")	2 2/3" X 1/2"
48" to 54"	12	3" X 1"
60" +	10	5" X 1"

SUBSECTION ASPHALT

10-35 HOT MIX ASPHALT (HMA)

HMA must be CL ½", PG 64-22. The materials that HMA is composed of must be of such sizes, grading, and quantity that, when proportioned and mixed, they will produce a well-graded mixture within the requirements listed below. The aggregate percentage refers to completed dry mix, and includes mineral filler when used.

% Passing ¾" square sieve	100%
% Passing ½" square sieve	90 - 100%
% Passing ⅜" square sieve	90% max
% Passing U.S. #8 sieve	28 - 58%
% Passing U.S. #200 sieve	2 - 7% max


Emulsified Asphalt: Asphalt binder for the tack coat must be emulsified asphalt, CSS-1 grade meeting the requirements of Section 9-02.1(6) Cationic Emulsified Asphalt of the WSDOT Standard Specifications.

HMA must conform to Sections 5-04 of the WSDOT Standard Specifications, except 5-04.5.

- Asphalt mixing plants must be capable of meeting the requirements of Section 5-04.3(1) – HMA Mixing Plant.
- Subgrade preparation must meet the requirements of Section 2-06.3(2) – Subgrade for Pavement.
- The placement of HMA must be applied in accordance with Section 5-04.3(3) – Asphalt Pavers.
- The compaction of the HMA must meet the requirements of Section 5-04.3(10) – Compaction.

Proposed changes to the HMA must be approved by the Region Engineer.


ROCK LIST SHEET

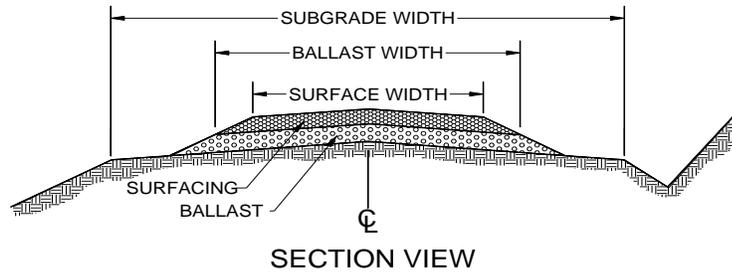

1. Rock quantities, subtotals and totals are "truck measure" estimates. Rock shall be applied to at least the depths listed.
2. All depths are compacted depths.
3. Rock slopes shall be 1½ (H) : 1 (V).
4. All rock sources are subject to approval by the Contract Administrator.
5. Pitrun is defined as pitrun or ballast per Line 6. Crushed is defined as any crushed rock from ¼" minus to 4" minus per Line 6. Oversize is defined as oversize, quarry spalls, light loose rip rap, or heavy loose rip rap per Line 6.
6. Rock sources= 1: Mora Pit Pitrun, 2: Mora Pit Oversize, 3: Commercial Crushed Surface Top Course (CSTC), 4: Commercial Source Hot Mix Asphalt (HMA) – HMA shown in compacted measure.

ROAD NAME	START STATION	END STATION	SUBGRADE WIDTH (ft)	Pitrun SOURCE	Pitrun WIDTH (ft)	Pitrun DEPTH (in)	Pitrun Quantity(yd ³ /sta)	Pitrun SUBTOTAL(yd ³)	Crushed SOURCE	Crushed WIDTH (ft)	Crushed DEPTH (in)	Crushed Quantity(yd ³ /sta)	Crushed Subtotal(yd ³)	Oversize/ Rip rap Source	Oversize/Rip Rap Quantity(yd ³)
D-5040															
Post-haul	0+00	75+70		1				50							
D-5055															
Misc.	0+00	90+30		1				100							
Spot Patch	1+35	1+65		1				10							
Lift	68+65	69+75		1	12	6	35	40							
Culvert	70+30			1				30						2	2
Spot Patch	71+78	72+06		1				10							
Spot Patch	79+45	79+75		1				10							
Spot Patch	87+25	87+55		1				10							
Post-haul	0+00	90+30		1				100							
D-5055.3															
Misc.	0+00	27+80		1				150							
Turnout	5+55			1				10							
Landing	15+90			1				50							
Culvert	19+48			1				20						2	1
Spot Patch	21+40			1				10							
Spot Patch	22+95			1				10							
Culvert	25+48			1				20						2	1
Landing	27+65			1				30							
D-5055.31															
Misc.	0+00	11+30		1				140							
Landing	4+95			1				30							
Totals:								830							4


ROCK LIST SHEET CONTINUED

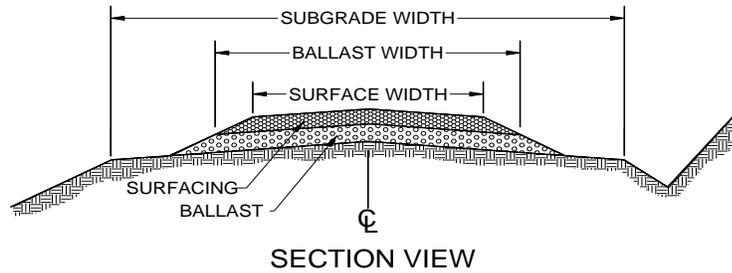

1. Rock quantities, subtotals and totals are "truck measure" estimates. Rock shall be applied to at least the depths listed.
2. All depths are compacted depths.
3. Rock slopes shall be 1½ (H) : 1 (V).
4. All rock sources are subject to approval by the Contract Administrator.
5. Pitrun is defined as pitrun or ballast per Line 6. Crushed is defined as any crushed rock from ¼" minus to 4" minus per Line 6. Oversize is defined as oversize, quarry spalls, light loose rip rap, or heavy loose rip rap per Line 6.
6. Rock sources= 1: Mora Pit Pitrun, 2: Mora Pit Oversize, 3: Commercial Crushed Surface Top Course (CSTC), 4: Commercial Source Hot Mix Asphalt (HMA) – HMA shown in compacted measure.

ROAD NAME	START STATION	END STATION	SUBGRADE WIDTH (ft)	Pitrun SOURCE	Pitrun WIDTH (ft)	Pitrun DEPTH (in)	Pitrun Quantity(yd ³ /sta)	Pitrun SUBTOTAL(yd ³)	Crushed SOURCE	Crushed WIDTH (ft)	Crushed DEPTH (in)	Crushed Quantity(yd ³ /sta)	Crushed Subtotal(yd ³)	Oversize/ Rip rap Source	Oversize/Rip Rap Quantity(yd ³)
Landing	8+90			1				50							
D-5055.311															
Lift	0+00	1+40		1	12	12	70	100							
D-5055.32															
Lift	0+00	5+50		1	12	12	70	390							
Spot Patch	0+48			1				10							
Landing	5+50			1				50							
D-5055.5															
Misc.	0+00	58+00		1				300							
Turnaround	5+05			1				30							
Lift	5+60	7+80		1	12	6	35	80							
Culvert	7+30			1				20						2	1
Spot Patch	13+40	13+70		1				10							
Culvert	17+72			1				30						2	2
Culvert	19+15			1				30						2	1
Culvert	26+63			1				20						2	1
Culvert	29+65			1				20						2	1
Turnaround	31+35			1				40							
Culvert	32+52			1				20						2	1
Lift	32+92	33+78		1	12	6	35	30							
Culvert	35+40			1				20						2	1
Turnaround	39+05			1				40							
Culvert	41+25			1				20						2	1
Totals:								1310							9

ROCK LIST SHEET CONTINUED

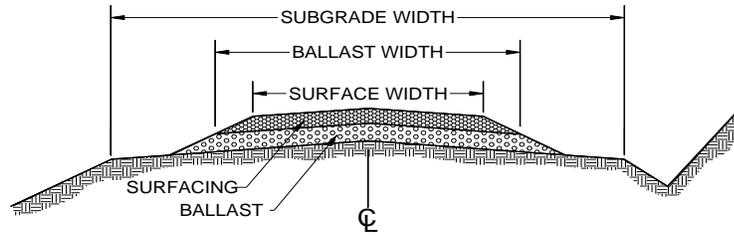

SECTION VIEW

1. Rock quantities, subtotals and totals are "truck measure" estimates. Rock shall be applied to at least the depths listed.
2. All depths are compacted depths.
3. Rock slopes shall be 1½ (H) : 1 (V).
4. All rock sources are subject to approval by the Contract Administrator.
5. Pitrun is defined as pitrun or ballast per Line 6. Crushed is defined as any crushed rock from ¼" minus to 4" minus per Line 6. Oversize is defined as oversize, quarry spalls, light loose rip rap, or heavy loose rip rap per Line 6.
6. Rock sources= 1: Mora Pit Pitrun, 2: Mora Pit Oversize, 3: Commercial Crushed Surface Top Course (CSTC), 4: Commercial Source Hot Mix Asphalt (HMA) – HMA shown in compacted measure.

ROAD NAME	START STATION	END STATION	SUBGRADE WIDTH (ft)	Pitrun SOURCE	Pitrun WIDTH (ft)	Pitrun DEPTH (in)	Pitrun Quantity(yd ³ /sta)	Pitrun SUBTOTAL(yd ³)	Crushed SOURCE	Crushed WIDTH (ft)	Crushed DEPTH (in)	Crushed Quantity(yd ³ /sta)	Crushed Subtotal(yd ³)	Oversize/ Rip Rap Source	Oversize/Rip Rap Quantity(yd ³)
D-5055.5 (Cont.)															
Lift	45+40	46+25		1	12	6	35	30							
Culvert	51+90			1				20						2	1
Culvert	52+82			1				40						2	2
Lift	55+78	56+38		1	12	6	35	20							
D-5055.51															
Lift	0+00	1+10		1	12	6	35	40							
D-5055.53															
Lift	0+00	9+50		1	12	6	35	340							
Turnaround	5+15			1				30							
D-5055.54															
Lift	0+00	1+85		1	12	6	35	70							
Misc.	0+00	1+85		1				30							
D-5055.6															
Lift	0+00	9+30		1	12	6	35	330							
Spot Patch	0+71			1				10							
Spot Patch	2+39			1				10							
Spot Patch	4+23			1				10							
Culvert	5+20			1				20						2	1
As Needed															
Contingency Culverts				1				40						2	1
D-3400															
Crushed (CSTC)	0+00	0+50							3	—	2		20		
Asphalt (HMA)	0+00	0+50							4	—	4		21.2		
Totals:								1040					41.2		6
Grand Totals:								3180					41.2		19

CULVERT LIST

ROAD NAME	STATION	CULVERT DIAMETER (in)	CULVERT LENGTH (ft)	FLUME LENGTH (ft)	DOWNSPOUT LENGTH (ft)	RIP RAP - INLET (cy)	RIP RAP - OUTLET (cy)	BACKFILL MATERIAL	NOTES
D-5055 *	70+30	24	36			1.0	1.0	PR	Replace existing culvert.
D-5055.3	19+48	18	30			0.5	0.5	PR	Install new culvert.
D-5055.3	25+48	18	30			0.5	0.5	PR	Install new culvert.
D-5055.5	7+30	18	30			0.5	0.5	PR	Install new culvert. Ditch out left 30'.
D-5055.5 *	17+72	24	30			1.0	1.0	PR	Replace existing culvert.
D-5055.5	19+15	18	30			0.5	0.5	PR	Replace existing culvert.
D-5055.5	26+63	18	26			0.5	0.5	PR	Replace existing culvert and construct culvert headwall.
D-5055.5	29+65	18	26			0.5	0.5	PR	Install new culvert and construct culvert headwall. Ditch out right 30'.
D-5055.5	32+52	18	26			0.5	0.5	PR	Install new culvert and construct culvert headwall. Ditch out right 30'.
D-5055.5	35+40	18	26			0.5	0.5	PR	Install new culvert. Ditch out right 30'.
D-5055.5	37+70	18	—			0.5	0.5	—	Culvert maintenance - construct culvert headwall.
D-5055.5	41+25	18	30			0.5	0.5	PR	Install new culvert.
D-5055.5	51+90	18	30			0.5	0.5	PR	Install new culvert and construct culvert headwall.
D-5055.5 *	52+82	24	30			1.0	1.0	PR	Replace existing culvert.
D-5055.53	1+30	18	—			0.5	0.5	—	Culvert maintenance - construct culvert headwall.
D-5055.6	5+20	18	26			0.5	0.5	PR	Install new culvert and construct culvert headwall. Ditch out left 20'.
Contingency Culvert	—	18	30			0.5	0.5	PR	Install as directed by the Contract Administrator.
Contingency Culvert	—	18	30			0.5	0.5	PR	Install as directed by the Contract Administrator.

All rip rap shall be Oversize unless specified in the Rock List, or in the field.
 All backfill shall be native material (NT) unless specified otherwise. CR= 1 ¼" - crushed rock, PR= pitrun rock
 * Denotes live water location.

COMPACTION LIST


Road	Stations	Type	Max Depth per Lift (In)	Equipment Type	Equipment Weight (lbs)	Minimum Number of Passes	Maximum Operating Speed (mph)
Construction	All	Culvert Backfills	6	Jumping Jack	N/A	3	N/A
Construction	All	Subgrade, Embankment	6	Vibratory Smooth Drum Roller*	6,000	3	3
Construction	All	Rock Placement	6				
Pre-haul Maintenance	All	Existing Pre-haul Surface	6				
Pre-haul Maintenance, Post-haul Maintenance	All	Rock Lifts	6				
Pre-haul Maintenance	All	Culvert Backfills	6	Jumping Jack	N/A	3	N/A
Pre-haul Maintenance	All	Hot Mix Asphalt (HMA)	4	Vibratory Smooth Drum Roller *	WSDOT Standard Specifications, Section 5-04.3(10)		
Waste Areas	See Clause 4-37	Waste Material	24	Excavation Equipment	See Clause 4-39		

* A hand-operated vibratory plate compactor may be approved for compaction of CSTC and HMA in areas where there may be insufficient clearance for operating a vibratory smooth drum roller (such as around the D-3400 gate). Areas proposed to be compacted using other than a vibratory smooth drum roller must be approved in writing by the Contract Administrator.

D-3400 / Quillayute Road Road Approach Detail Sheet 1


SEC. 24, T28N, R15W
N 47° 55' 22", W 124° 34' 46"

New asphalt pavement shall be crowned 3 inches, in accordance with the Typical Section Sheet, and shaped for best possible drainage. Approximately 5 cubic yards of the rock removed for shaping and matching the new pavement level to the pavement level of the Quillayute Road shall be placed against the side of the new asphalt, for side support, along both shoulders of the approach.

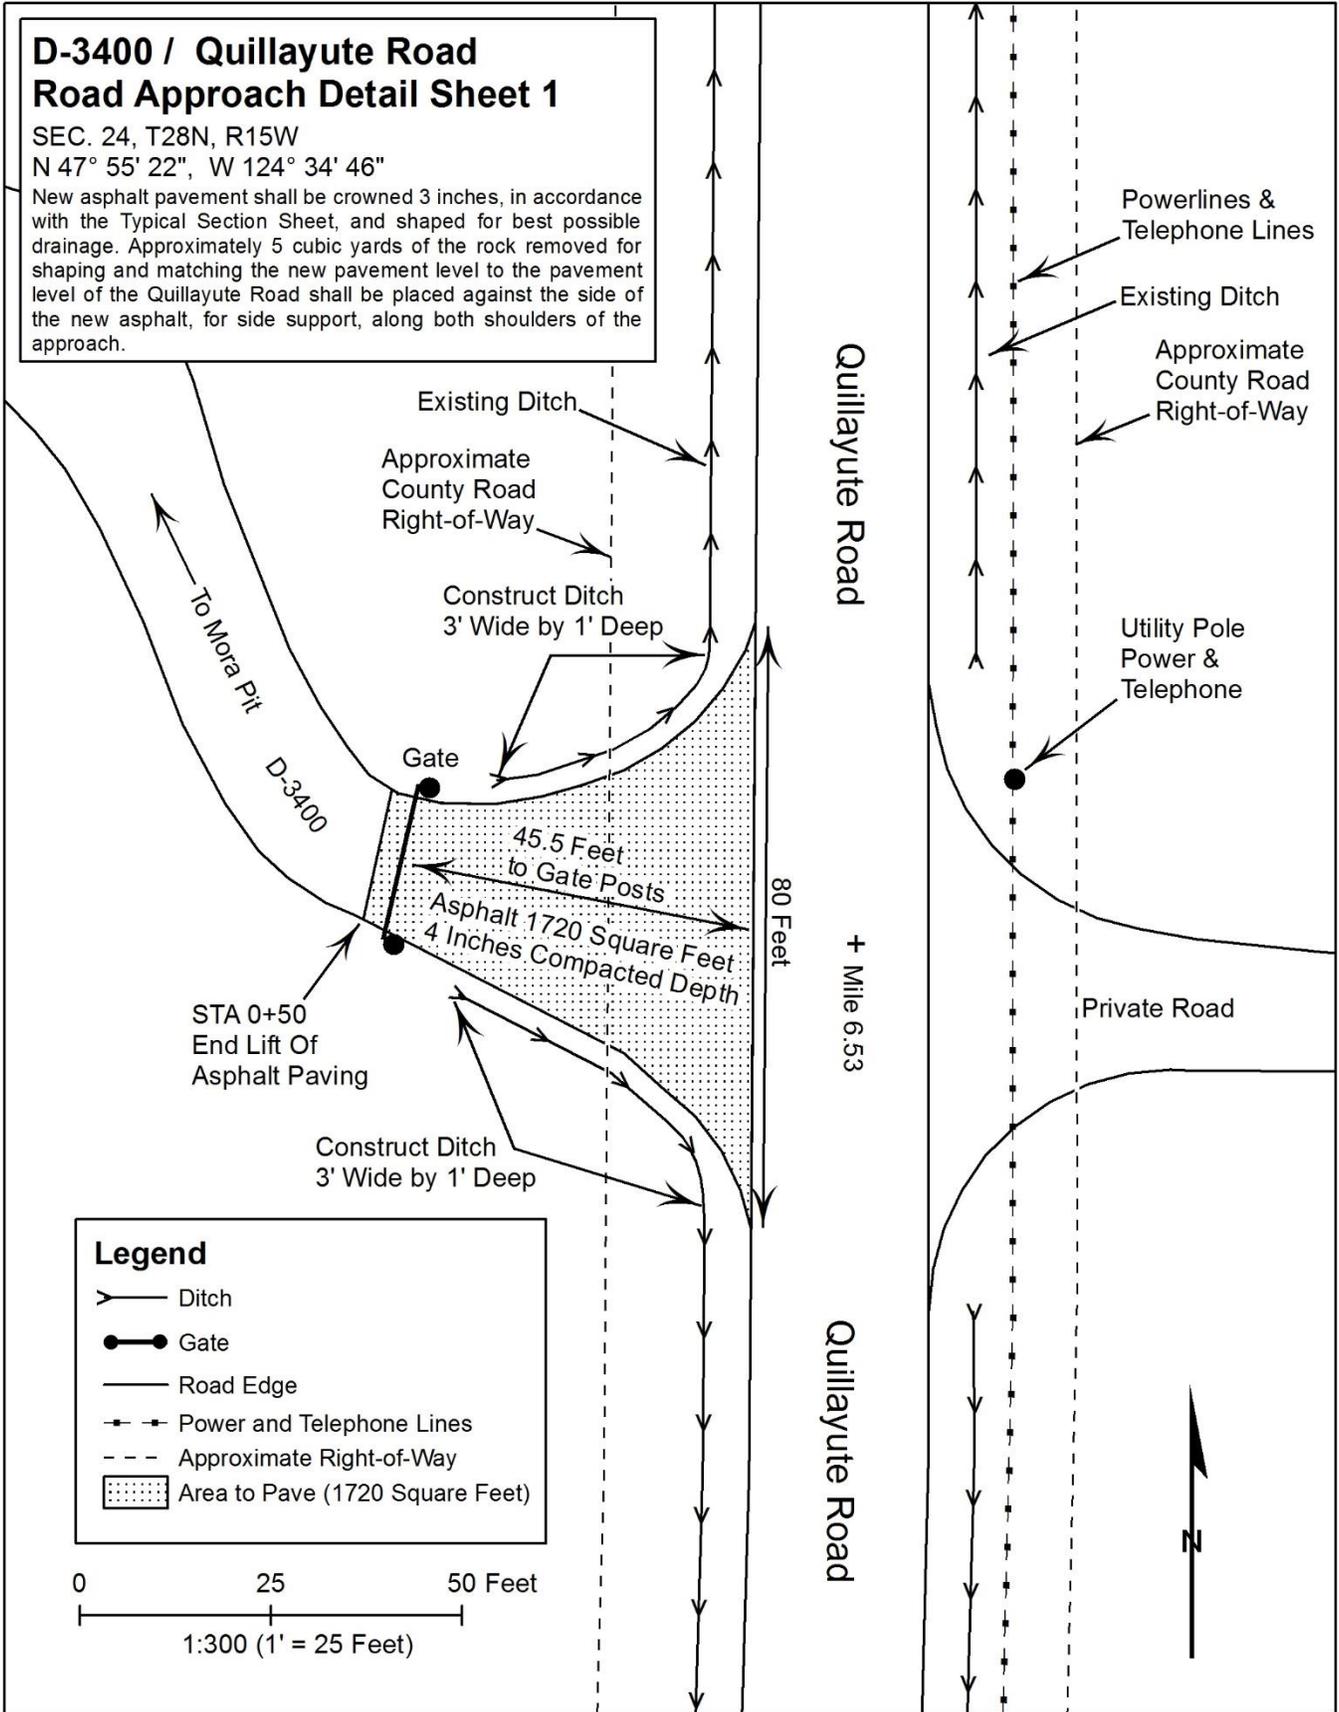


Legend


- Ditch
- Gate
- Road Edge
- Power and Telephone Lines
- Approximate Right-of-Way
- Area to Pave (1720 Square Feet)



D-3400 / Quillayute Road
 Road Approach Detail Sheet 2
 Sec. 24, T28N, R15W
 N 47° 55' 22"
 W 124° 34' 46"

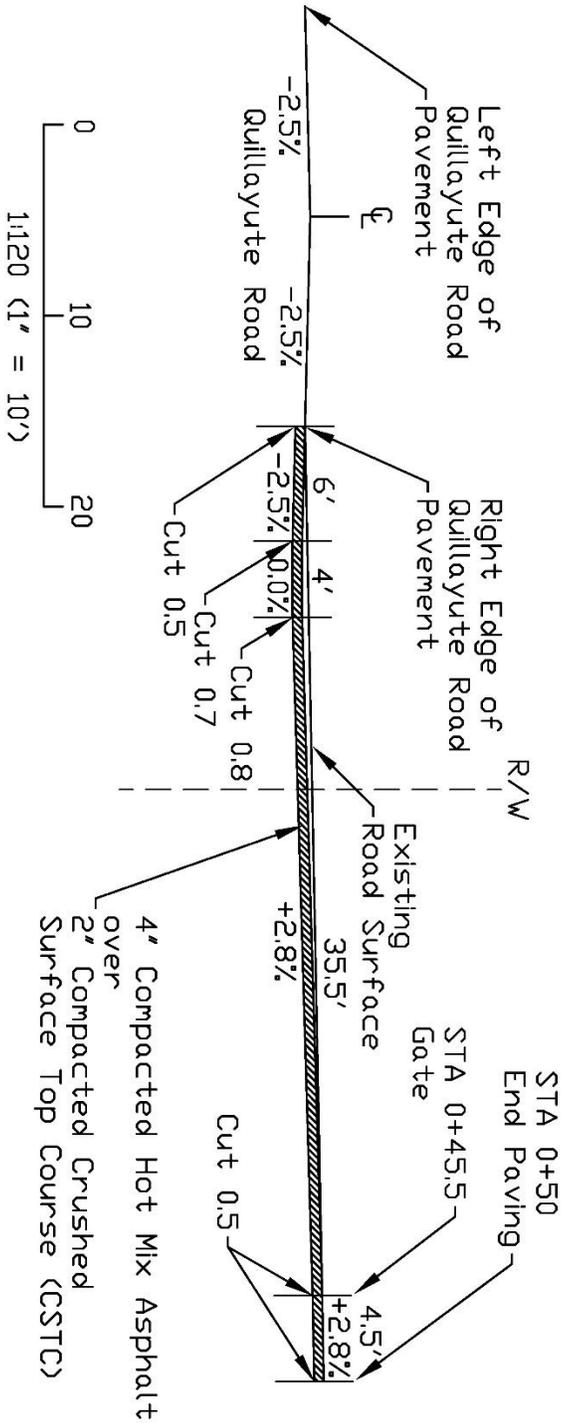

TYPICAL INTERSECTION

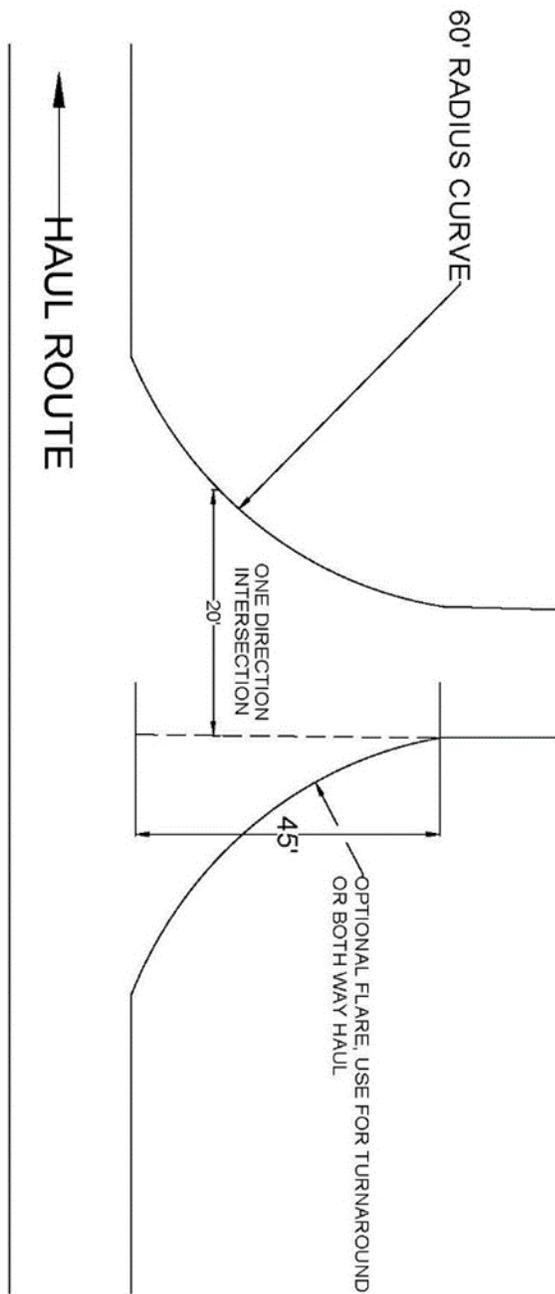


NOT TO SCALE

Typical Type Ns, Np Culvert Installation Detail Sheet.


- Water shall be diverted away from the work site before any "in stream" work begins, and shall continue until culvert installation is complete.
- Culvert lay shall match stream gradient up to 5%.
- Flumes longer than 10ft shall be staked on both sides at maximum intervals of 10ft with 6ft heavy duty steel fence posts, and fastened securely to the posts with No. 10 galvanized smooth wire or bolted to the fence posts.
- Rip rap shall be placed using a "zero height drop method", and shall be set in conjunction with the culvert installation.
- Rip rap shall be placed at headwalls, along the fill at the inlet, and at the end of flumes in accordance with this Detail. On culverts with no flume rip rap shall be placed along the fill at the outlet, unless there is stream drop or it is called for in the Road Plan, at which point it will be installed as an energy dissipater at the end of the culvert as specified in this Detail. All rip rap distance to be determined by the Contract Administrator or the District Engineer.
- Backfill compaction shall be achieved using a jumping jack, walk behind vibratory roller, or plate compactor on lifts not to exceed 8in. 3 complete passes per lift is required for compaction. Backfill shall be placed and compacted evenly on both sides of the culvert. Care shall be taken to ensure adequate compaction of backfill material under the haunches of the pipe. Excavation trench width shall be at least culvert diameter plus 3 times the width of the compactor footprint used.

Culvert Minimum Cover		
Diameter	Steel	Plastic
24"	18"	24"
30" - 42"	24"	24"
48" On	36"	36"


Cross Section View: Flume

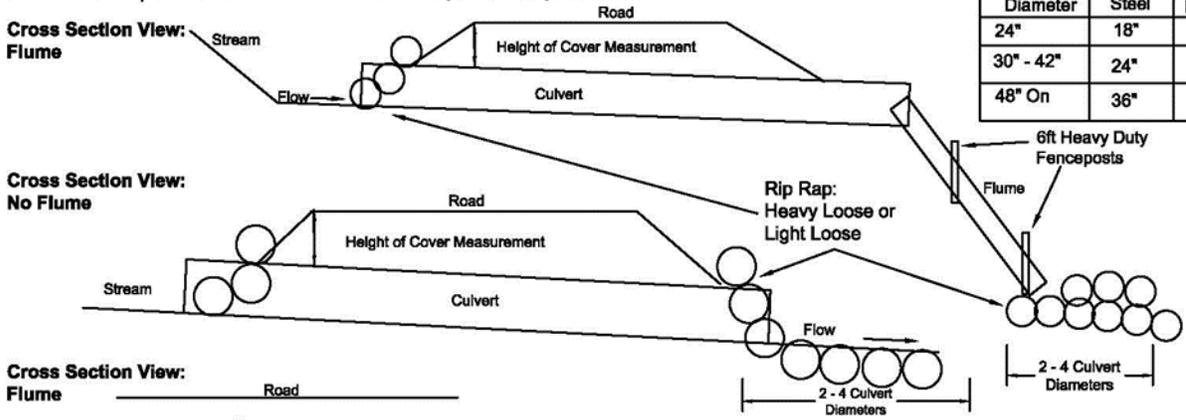


Cross Section View: No Flume

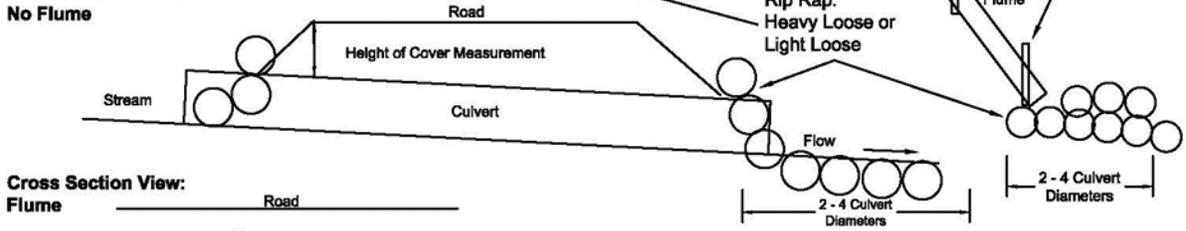


Cross Section View: Flume

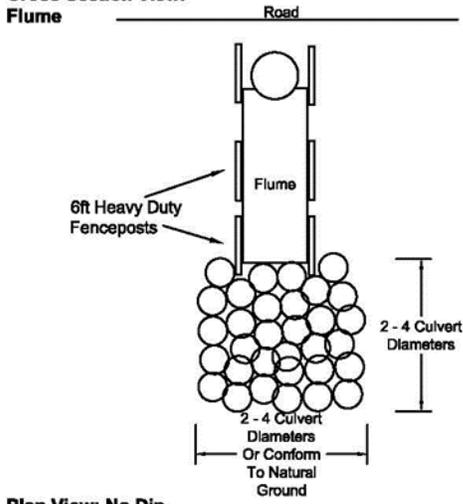


Cross Section View: No Flume

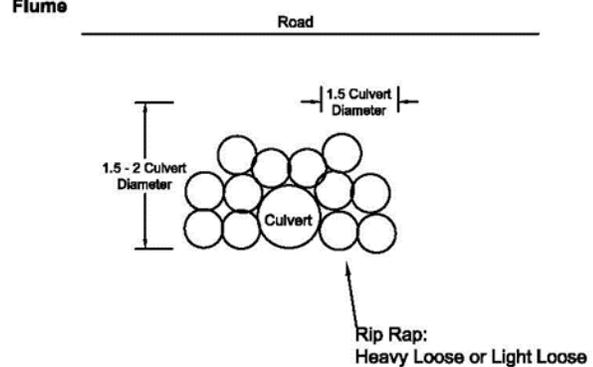

Plan View: No Dip

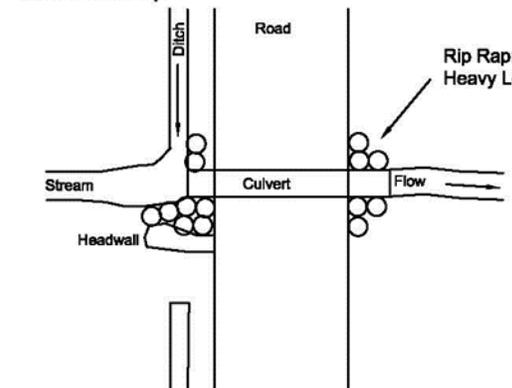


Plan View: Dip

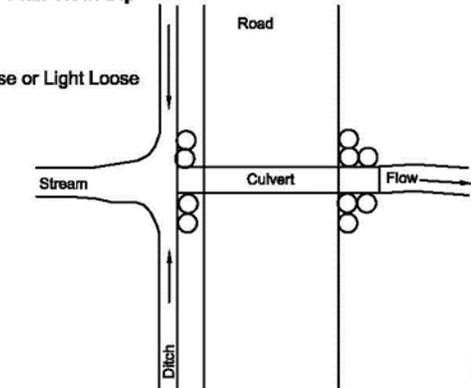


Not To Scale

BRUSHING DETAIL

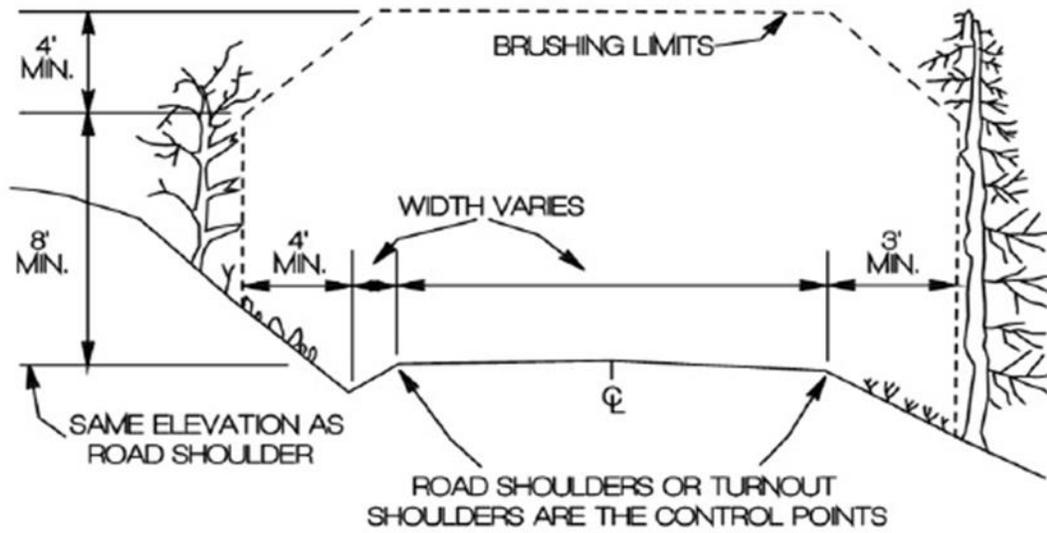


TYPICAL BRUSHING LIMITS SECTION

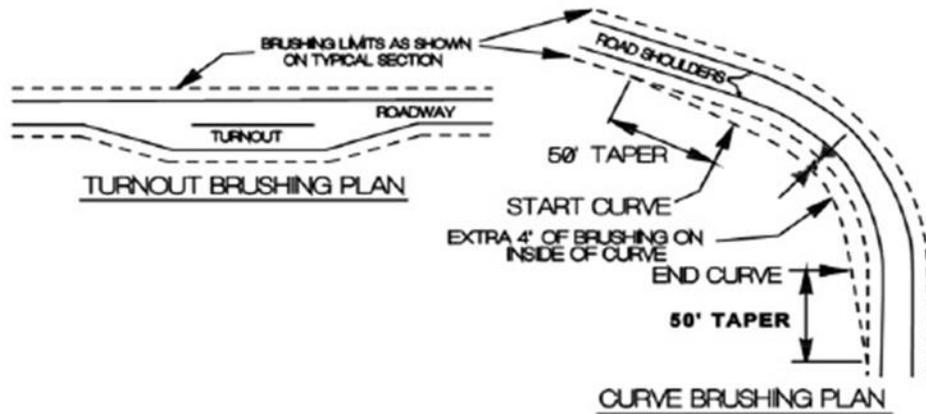

- 1) ALL VEGETATION WITHIN THE BRUSHING LIMITS SHALL BE CUT TO WITHIN 8' OF THE GROUND, UNLESS OTHERWISE DIRECTED BY THE CONTRACT ADMINISTRATOR.
- 2) ALL BRUSH, TREES, LIMBS, ETC. SHALL BE REMOVED FROM THE ROAD SURFACE.
- 3) ALL BRUSH, TREES, LIMBS, ETC. THAT MAY RESTRICT THE FLOW OF WATER SHALL BE REMOVED FROM THE DITCH LINE.
- 4) ALL DEBRIS THAT MAY ROLL OR MIGRATE INTO THE DITCH-LINE SHALL BE REMOVED.

Mora Pit Plan

Sec. 23 & 24, T28N, R15W

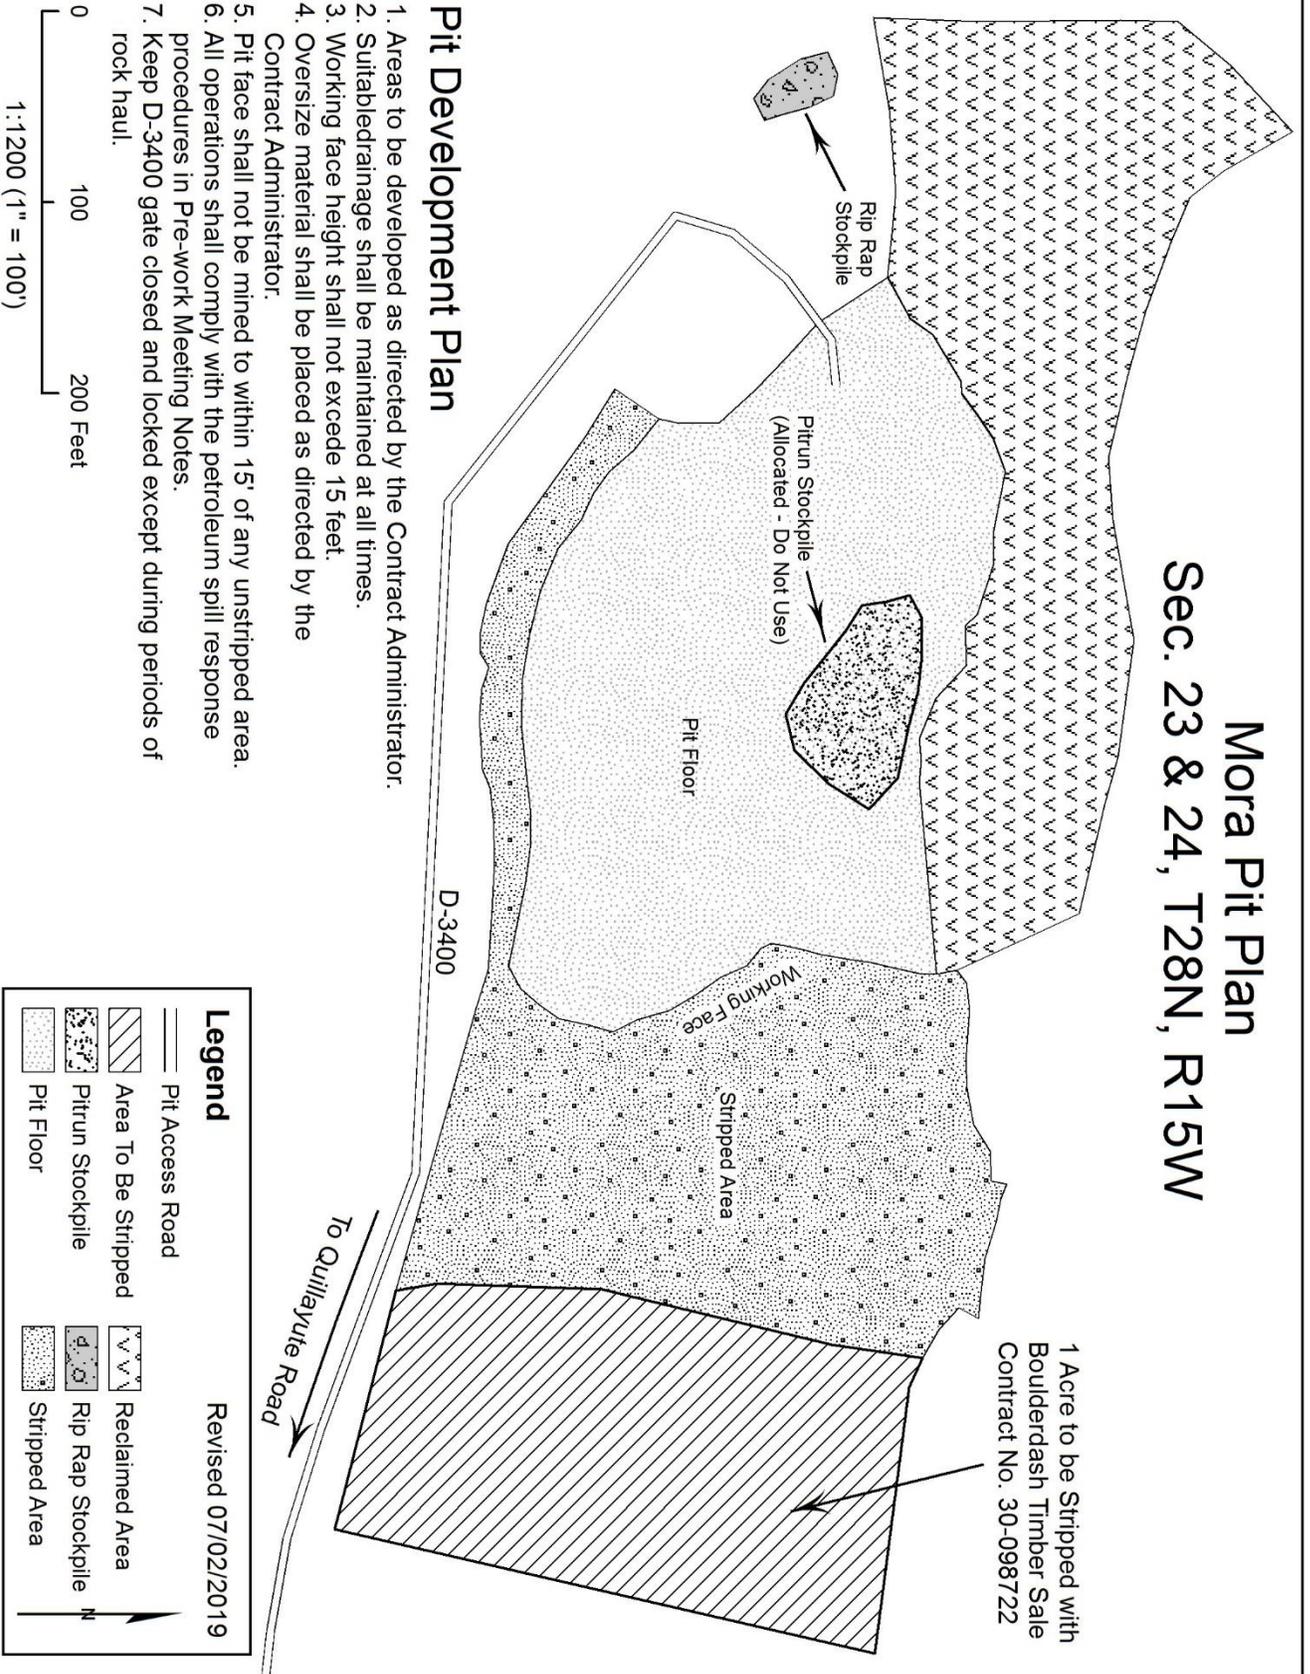

		SUMMARY - Road Development Costs																							
SALE NAME:	Bitten	CONTRACT#:	30-099254	REGION:	Olympic	DISTRICT:	Coast						TOTAL												
LEGAL DESCRIPTION:	Sec. 15-16, 21-23, 26, T29N, R15W																								
ROAD NAME:		D-5040		D-5050		D-5055		D-5055.3		D-5055.31		D-5055.311		D-5055.32		D-5055.5		D-5055.51		D-5055.53		D-5055.54		TOTAL:	SHEET#2-4
ROAD TYPE:		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul		Prehaul			
NUMBER OF STATIONS:		75.70		6.95		90.30		27.80		11.30		1.40		5.50		58.00		1.10		9.50		1.85		289.90	240.25
SIDESLOPE:		0%		0%		0%		0%		0%		0%		0%		0%		0%		0%		0%			
CLEARING AND GRUBBING:		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0	\$0
ROAD BRUSHING:		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0	\$0
EXCAVATION AND FILL:		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$0	\$0
ROAD GRADING:		\$492		\$45		\$587		\$181		\$73		\$0		\$0		\$377		\$0		\$0		\$0		\$1,755	\$1,501
DITCH CLEANING/CONSTRUCTION:		\$0		\$0		\$1,695		\$1,096		\$425		\$0		\$90		\$1,771		\$0		\$350		\$67		\$5,493	\$316
ROCK TOTALS (Cu. Yds.)/ROCK COSTS:																									
Ballast:	3180	3,180	0	0	210	300	220	100	450	820	40	370	100	2,610	570										
Surface:	0	0	\$0	\$0	\$3,047	\$4,497	\$3,315	\$1,503	\$6,764	\$12,685	\$603	\$5,654	\$1,568	\$39,636	\$7,695										
OverSIZE:	19	19	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0	\$0
CULVERTS AND FLUMES:		\$0		\$0		\$30		\$30		\$2		\$0		\$0		\$189		\$0		\$0		\$0		\$249	\$46
STRUCTURES:		\$0		\$0		\$0		\$0		\$0		\$0		\$0		\$6,489		\$0		\$0		\$0		\$8,745	\$1,892
MISC. EXPENSES:		\$146		\$0		\$460		\$248		\$286		\$3		\$399		\$4,133		\$80		\$709		\$134		\$6,598	\$695
OVERHEAD:		\$57		\$4		\$608		\$664		\$369		\$136		\$653		\$2,308		\$61		\$604		\$159		\$5,623	\$1,201
TOTAL COSTS:		\$695		\$49		\$7,363		\$8,036		\$4,469		\$1,642		\$7,905		\$27,951		\$744		\$7,317		\$1,929		\$68,098	\$13,345
COST PER STATION:		\$9		\$7		\$82		\$289		\$395		\$1,173		\$1,437		\$482		\$676		\$770		\$1,043		\$235	\$55.55
MOBILIZATION:						\$5,750																			
ROAD DECOMMISSIONING AND ABANDONMENT COSTS:						\$0																			
Pave D-3400 Road Approach STA:		0.5		\$20,000																					
NOTE:	This appraisal has no allowance for profit and risk.																								
Sheet 1 of 2																									
Plans to be furnished by:																									

Road Standard	Const.	Reconst.	Prehaul	Posthaul	TOTAL (All Roads) =
Total Costs =	\$0	\$0	\$102,090	\$6,904	\$108,994
Total Sta. =	0	0	299.20	230.95	2,876
Cost per Sta. =	\$0	\$0	\$341	\$30	\$38
Compiled by:	Craig Megumson				TOTAL COST PER STATION =
Date:	3/31/20				\$206

FOREST ACCESS ROAD MAINTENANCE SPECIFICATIONS

Cuts and Fills

- Maintain slope lines to a stable gradient compatible with the cut slope/fill slope ratios. Remove slides from ditches and the roadway. Repair fill-failures in accordance with Clause 4-6 Embankment Slope Ratio, and with material approved by the Contract Administrator. Remove overhanging material from the top of cut slopes.
- Waste material from slides or other sources shall be placed and compacted in stable locations identified in the road plan or approved by the Contract Administrator, so that sediment will not deliver to any streams or wetlands.
- Slide material and debris shall not be mixed into the road surface materials, unless approved by the Contract Administrator.

Surface

- Grade, shape, and compact the road surface, turnouts, and shoulders to the original shape on the Typical Section Sheet, to provide a smooth, rut-free traveled surface and maintain surface water runoff in an even, unconcentrated manner.
- Blading shall not undercut the backslope or cut into geotextile fabric on the road.
- If required by the Contract Administrator, water shall be applied as necessary to control dust and retain fine surface rock.
- Surface material shall not be bladed off the roadway. Replace surface material when lost or worn away, or as directed by the Contract Administrator.
- Remove shoulder berms, created by grading, to facilitate drainage, except as marked or directed by the Contract Administrator.
- For roads with geotextile fabric: spread surface aggregate to fill in soft spots and wheel ruts (barrel spread) to prevent damage to the geotextile fabric.

Drainage

- Prevent silt bearing road surface and ditch runoff from delivering sediment to any streams or wetlands.
- Maintain rolling dips and drivable waterbars as needed to keep them functioning as intended.
- Maintain culvert headwalls to a level slightly below the road shoulder with material that will resist erosion. This is to allow for culverts that are overtopped to keep the water in the ditchline.
- Maintain energy dissipaters at culvert outlets with non-erodible material or rock.
- Keep ditches, culverts, and other drainage structures clear of obstructions and functioning as intended.
- Inspect and clean culverts at least monthly, with additional inspections during storms and periods of high runoff. This shall be done even during periods of inactivity.

Preventative Maintenance


Perform preventative maintenance work to safeguard against storm damage, such as blading to ensure correct runoff, ditch and culvert cleaning, and waterbar maintenance.

Termination of Use or End of Season

At the conclusion of logging operations, ensure all conditions of these specifications have been met.

Debris


Remove fallen timber, limbs, and stumps from the slopes, roadway, ditchlines, and culvert inlets.

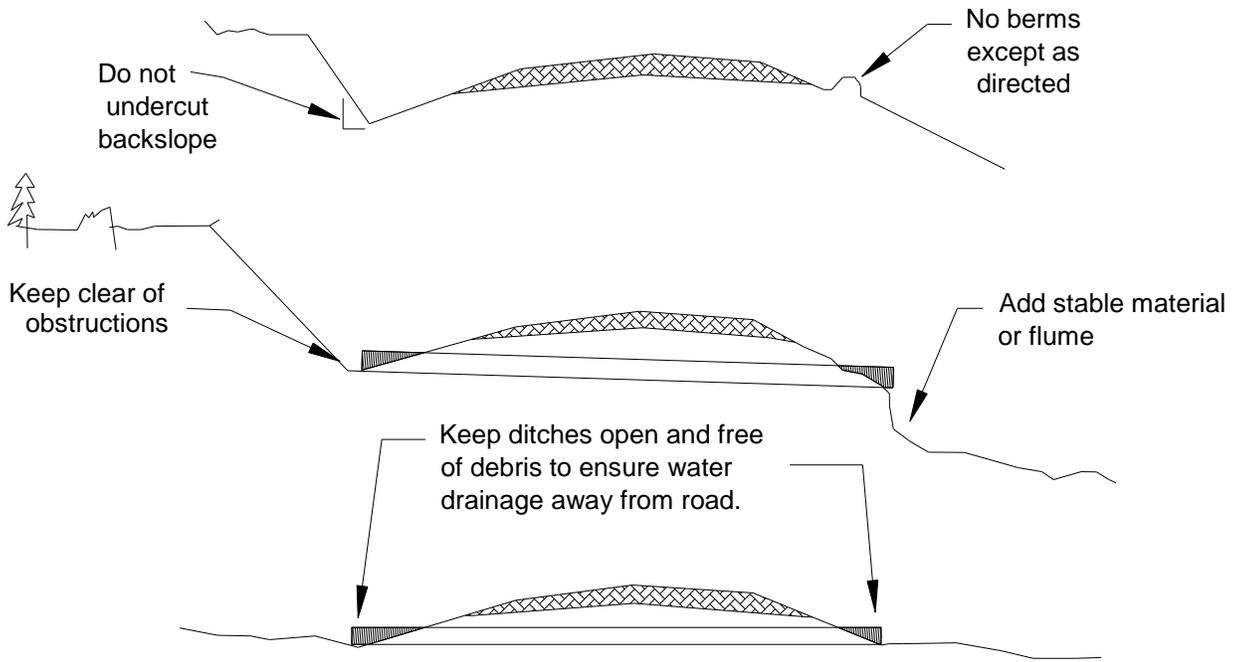

LOGGING PLAN MAP

SALE NAME: Bitten
AGREEMENT #: 30-099254
TOWNSHIP(S): T29R15W
TRUST(S): Common School and Indemnity (3)

REGION: Olympic Region
COUNTY(S): Clallam
ELEVATION RGE: 160' - 640'

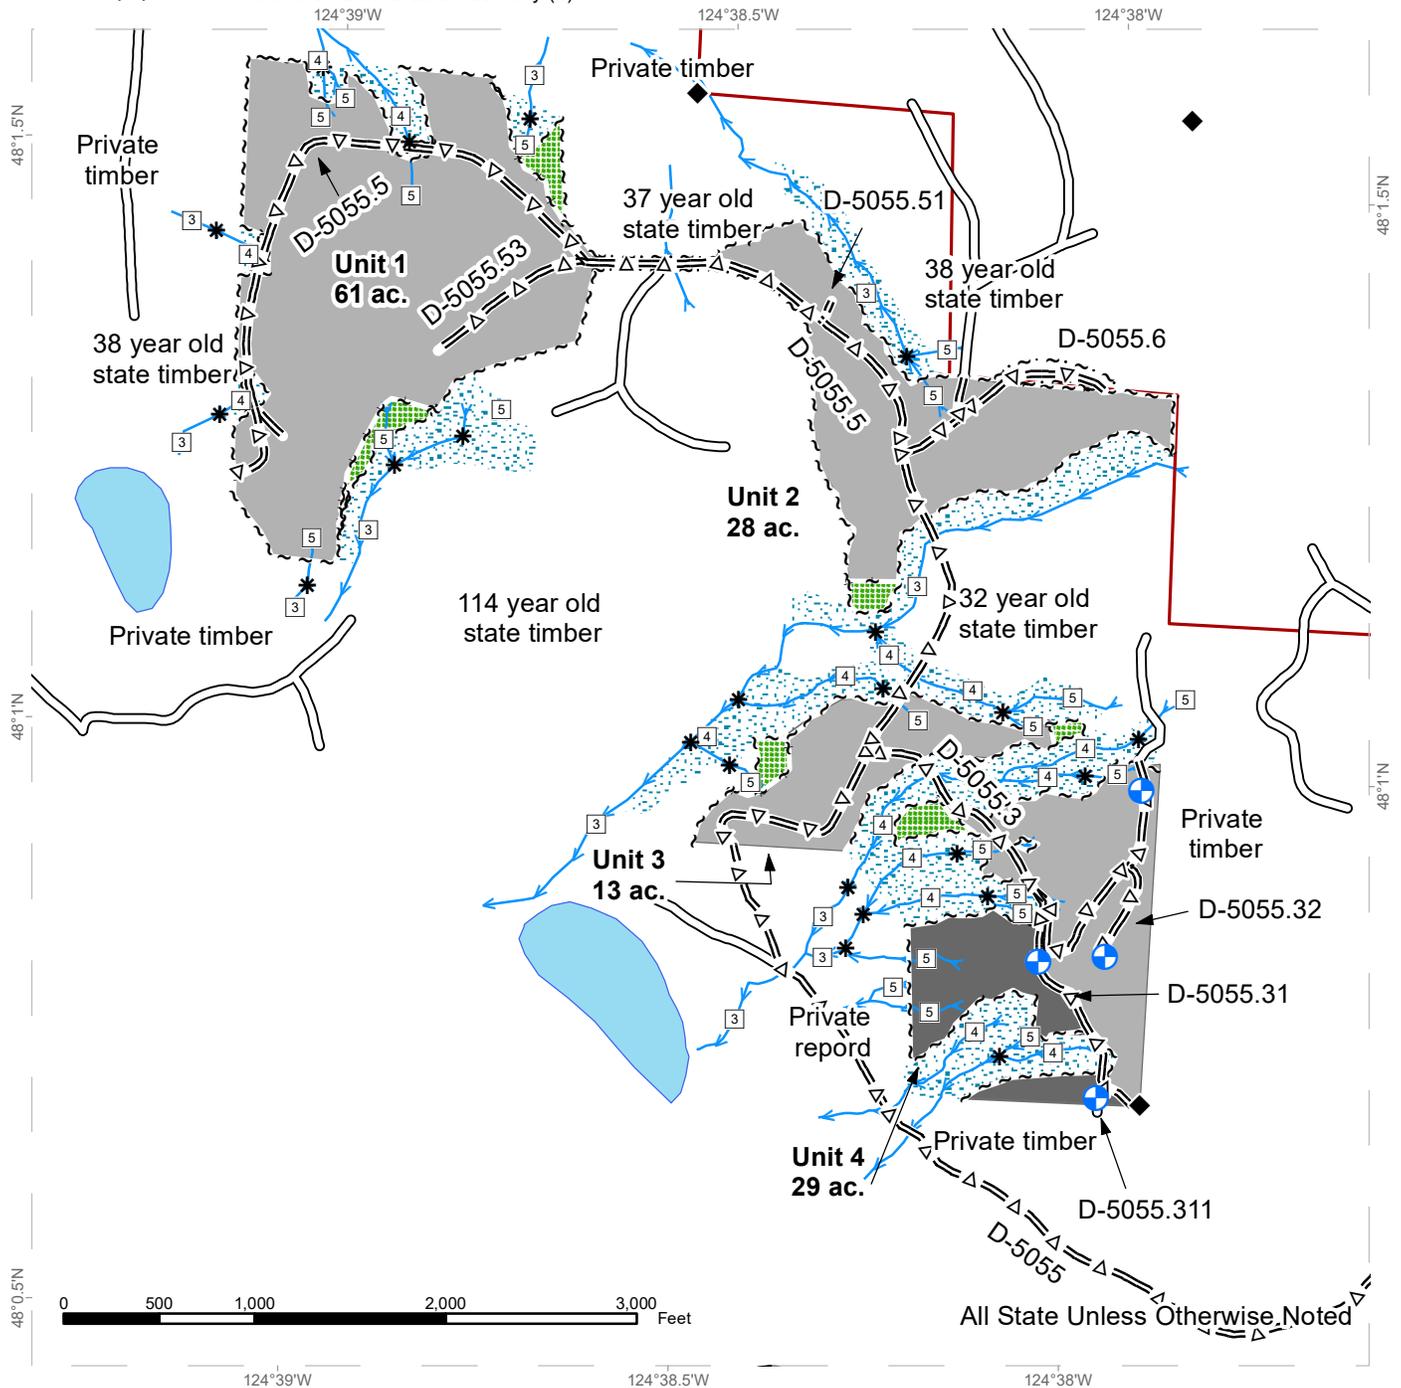

Legend	
	Streams
	Stream Type 3
	Stream Type 4
	Stream Type 5
	Stream Break
	Open Water
Harvest Method	
	Cable
	Ground
	Leave Tree Area
	Riparian Mgt Zone
	Sale Boundary Tags
	Right of Way Tags - Single
	Leave Tree Tags
	Existing Roads
	Optional Pre-Haul Maintenance
	Designated Landing
	Survey Monument